


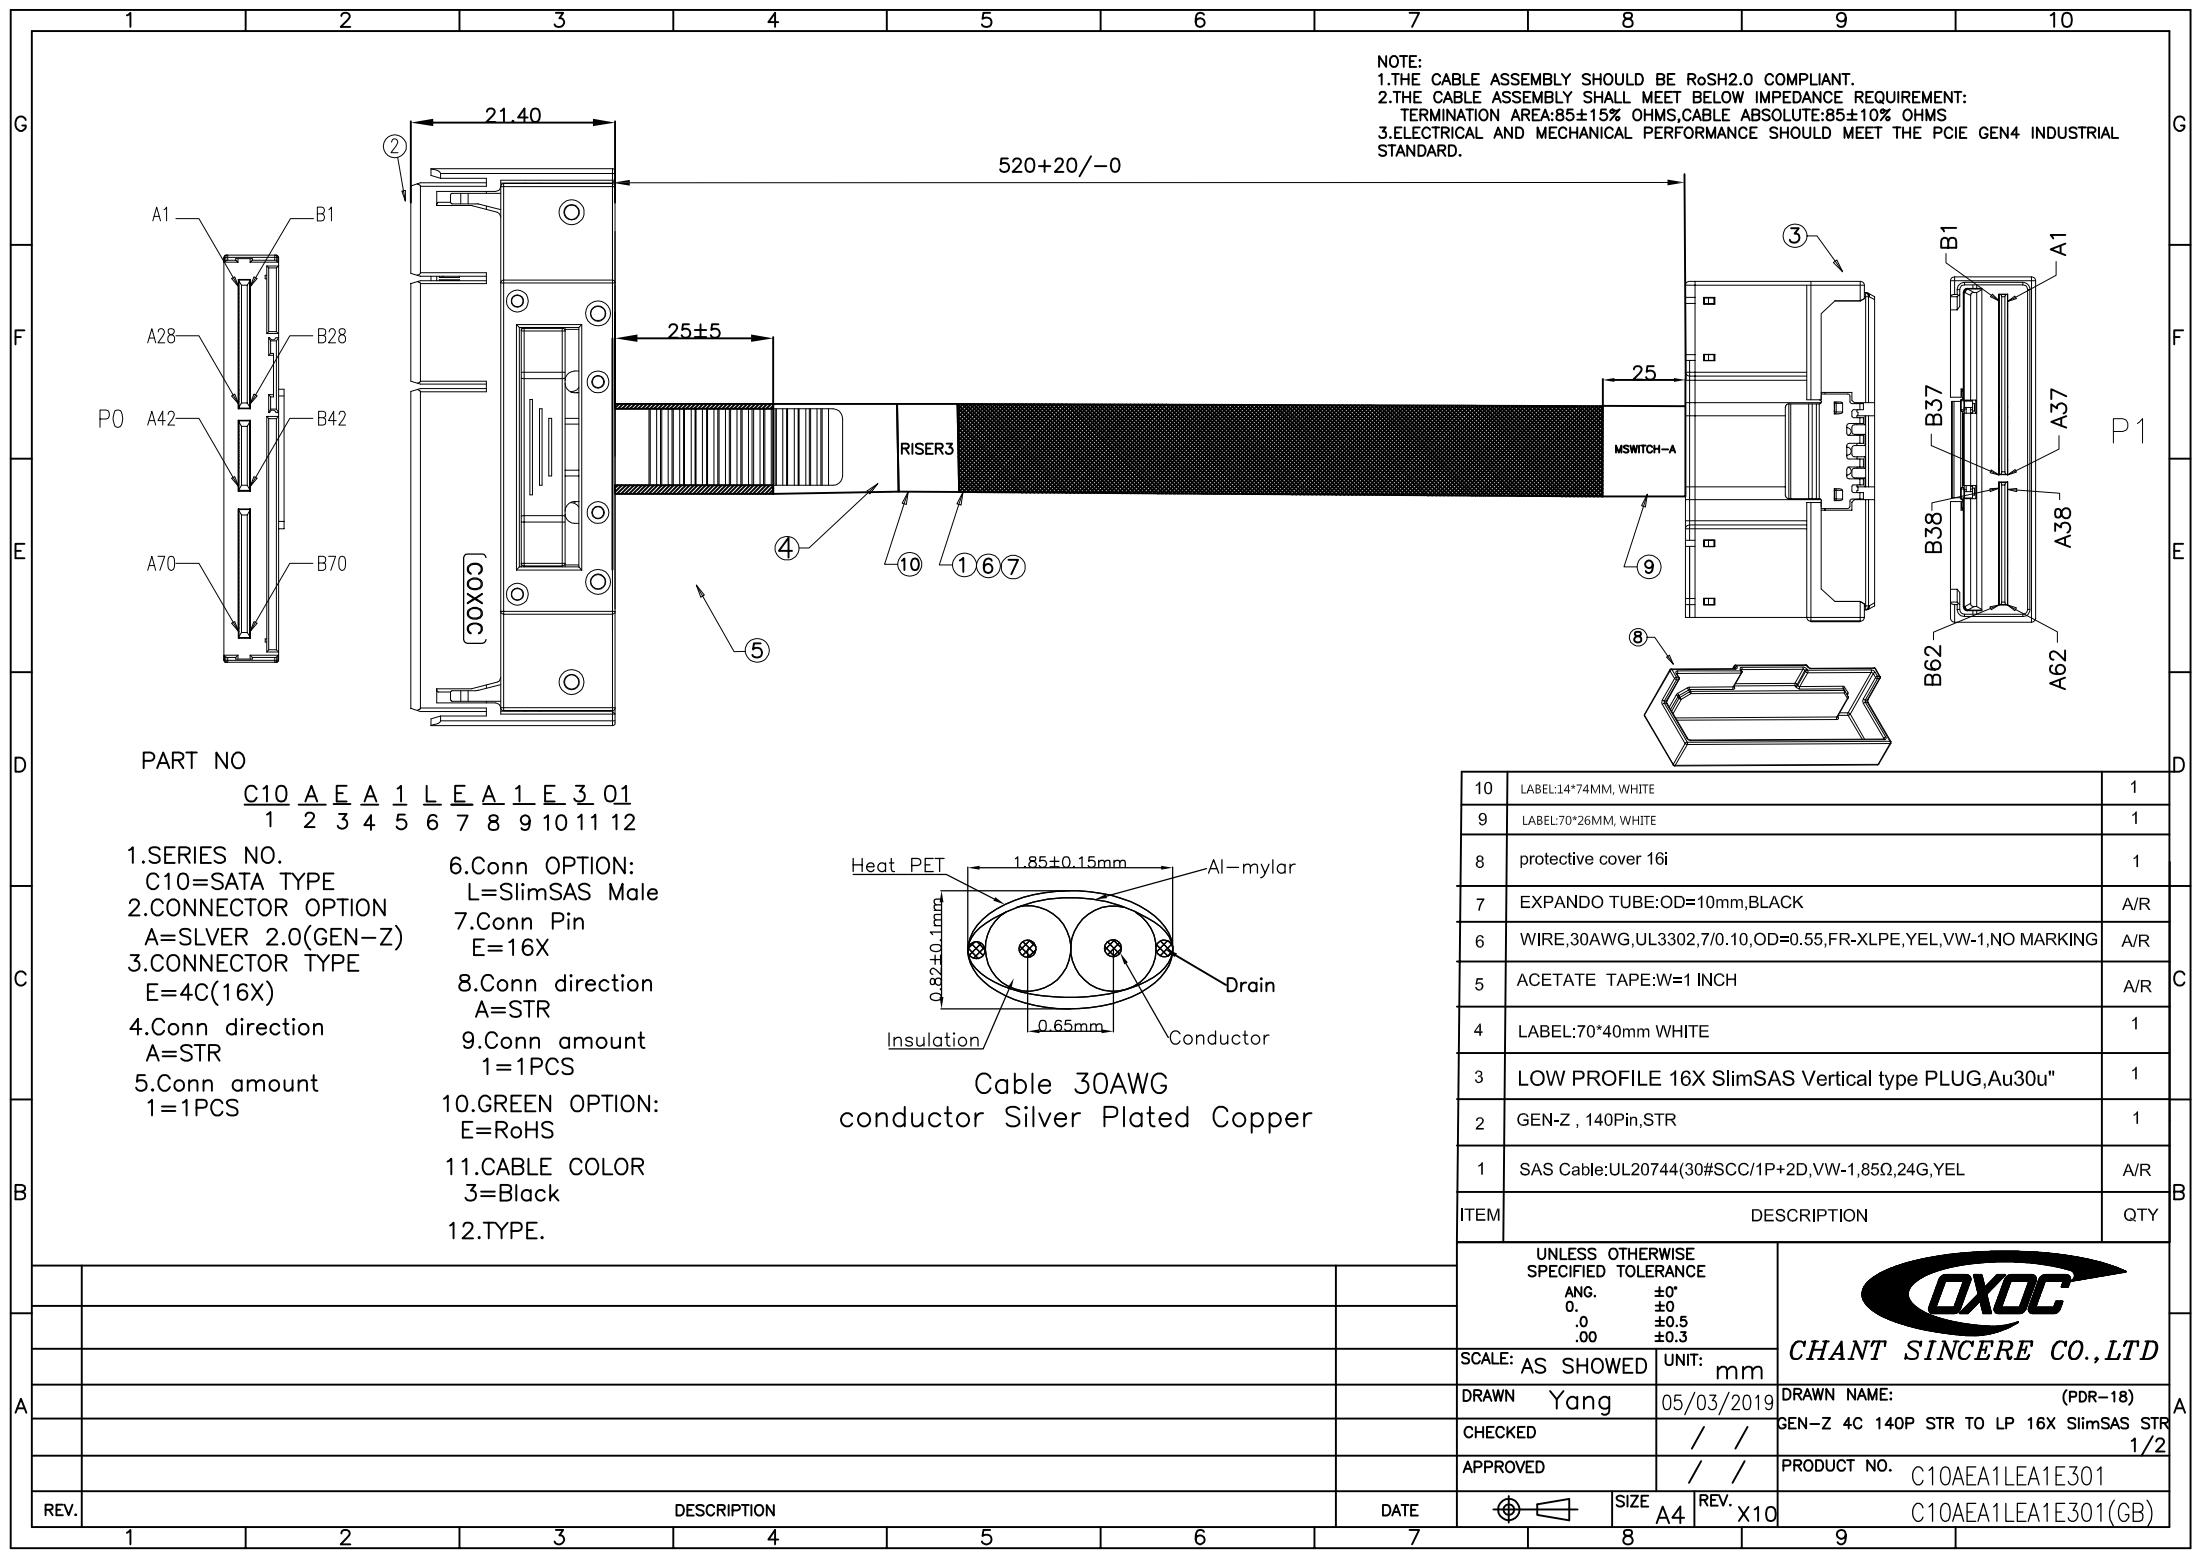


NOTE:
1.THE CABLE ASSEMBLY SHOULD BE RoSH2.0 COMPLIANT.
2.THE CABLE ASSEMBLY SHALL MEET BELOW IMPEDANCE REQUIREMENT:
TERMINATION AREA:85±15% OHMS,CABLE ABSOLUTE:85±10% OHMS
3.ELECTRICAL AND MECHANICAL PERFORMANCE SHOULD MEET THE PCIE GEN4 INDUSTRIAL STANDARD.

PART NO

C10 A E A 1 L E A 1 E 3 01
1 2 3 4 5 6 7 8 9 10 11 12

- 1.SERIES NO.
C10=SATA TYPE
2.CONNECTOR OPTION
A=SLVER 2.0(GEN-Z)
3.CONNECTOR TYPE
E=4C(16X)
4.Conn direction
A=STR
5.Conn amount
1=1PCS
6.Conn OPTION:
L=SlimSAS Male
7.Conn Pin
E=16X
8.Conn direction
A=STR
9.Conn amount
1=1PCS
10.GREEN OPTION:
E=RoHS
11.CABLE COLOR
3=Black
12.TYPE.

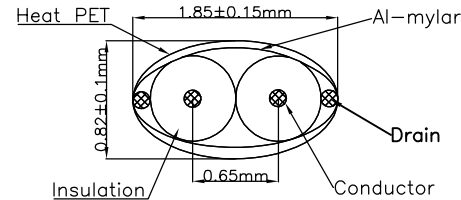

Cable 30AWG
conductor Silver Plated Copper

10	LABEL:14*74MM, WHITE	1
9	LABEL:70*26MM, WHITE	1
8	protective cover 16i	1
7	EXPANDO TUBE:OD=10mm,BLACK	A/R
6	WIRE,30AWG,UL3302,7/0.10,OD=0.55,FR-XLPE,YEL,VW-1,NO MARKING	A/R
5	ACETATE TAPE:W=1 INCH	A/R
4	LABEL:70*40mm WHITE	1
3	LOW PROFILE 16X SlimSAS Vertical type PLUG,Au30u"	1
2	GEN-Z , 140Pin,STR	1
1	SAS Cable:UL20744(30#SCC/1P+2D,VW-1,85Ω,24G,YEL	A/R
ITEM	DESCRIPTION	QTY

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO.,LTD
ANG.	±0"	
0.	±0	
.0	±0.5	
.00	±0.3	
SCALE: AS SHOWED	UNIT: mm	
DRAWN Yang	05/03/2019	DRAWN NAME: (PDR-18)
CHECKED	/ /	GEN-Z 4C 140P STR TO LP 16X SlimSAS STR 1/2
APPROVED	/ /	PRODUCT NO. C10AEA1LEA1E301
	SIZE A4	C10AEA1LEA1E301(GB)
	REV. X10	

REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		
7		

[illegible]