


NOTE:
1.THE CABLE ASSEMBLY MEET 12G REQUIREMENT.

PART NO.

C10	C2	1	3	B06	E	01
1	2	3	4	5	6	7


- | | |
|---|---------------------------|
| 1.SERIES NO.
C10=SATA TYPE | 4.CABLE COLOR
3=Black |
| 2.CONNECTOR OPTION
C2=HD Mini SAS /HD Mini SAS | 5.TYPE. |
| 3.CONNECTOR TYPE
1=M /M | 6.GREEN OPTION:
E=RoHS |
| | 7.LENGTH.
01=435mm |

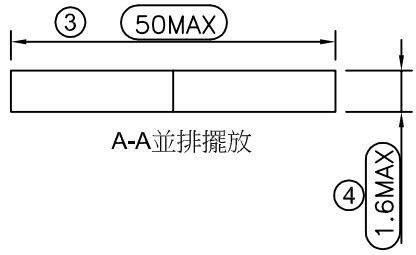

For SIP

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962	
ANG.	±3°		
.0	±0.30	DRAWN NAME: (PDR-18066) HD MINI SAS 8I to HD MINI SAS 4I Cable 1/2 PRODUCT NO: C10C213B06E01 FILE NAME: C10C213B06E01(GB)	
.00	±0.20		
SCALE: AS SHOWN	UNIT: mm		
DRAWN Riley	04/18/2019		
CHECKED	/ /		
APPROVED	/ /		
REV.	DESCRIPTION	DATE	 SIZE A4 REV. X7

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----

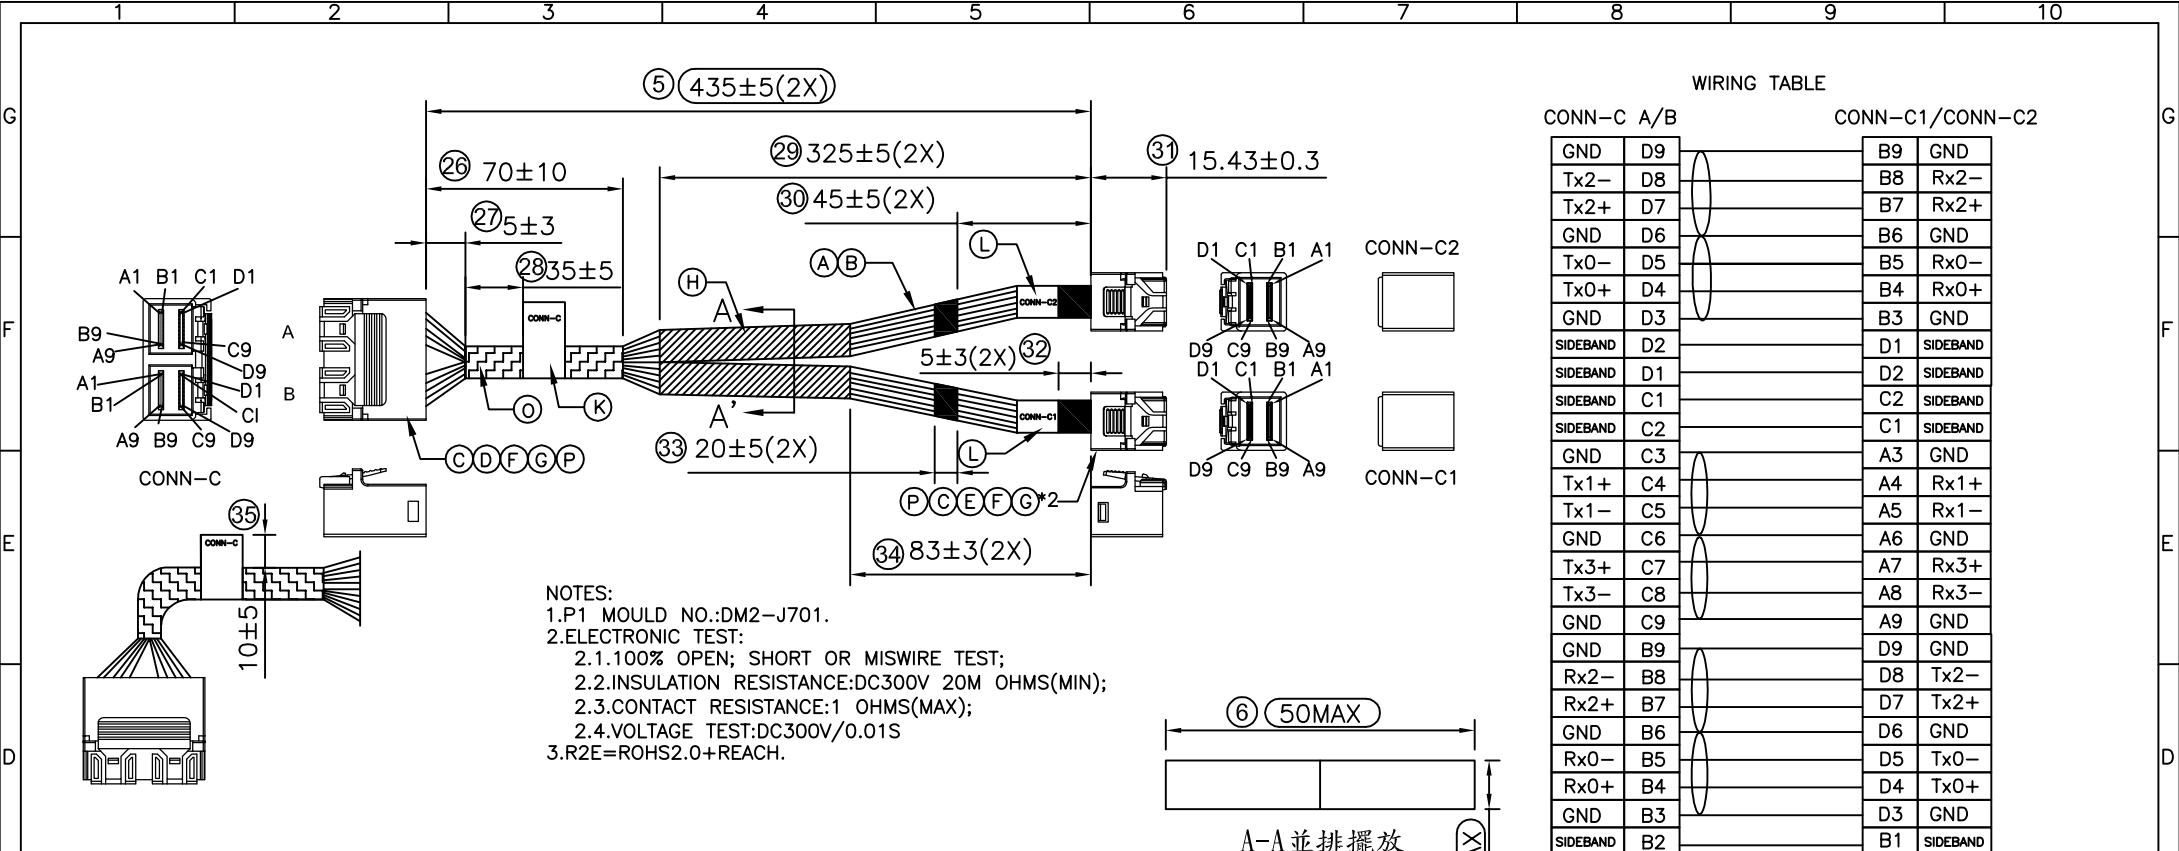

- NOTES:
 1.P1 MOULD NO.:DM2-J701.
 2.ELECTRONIC TEST:
 2.1.100% OPEN; SHORT OR MISWIRE TEST;
 2.2.INSULATION RESISTANCE:DC300V 20M OHMS(MIN);
 2.3.CONTACT RESISTANCE:1 OHMS(MAX);
 2.4.VOLTAGE TEST:DC300V/0.01S
 3.R2E=ROHS2.0+REACH.

WIRING TABLE

CONN-C A/B		CONN-C1/CONN-C2	
GND	D9	B9	GND
Tx2-	D8	B8	Rx2-
Tx2+	D7	B7	Rx2+
GND	D6	B6	GND
Tx0-	D5	B5	Rx0-
Tx0+	D4	B4	Rx0+
GND	D3	B3	GND
SIDEBAND	D2	D1	SIDEBAND
SIDEBAND	D1	D2	SIDEBAND
SIDEBAND	C1	C2	SIDEBAND
SIDEBAND	C2	C1	SIDEBAND
GND	C3	A3	GND
Tx1+	C4	A4	Rx1+
Tx1-	C5	A5	Rx1-
GND	C6	A6	GND
Tx3+	C7	A7	Rx3+
Tx3-	C8	A8	Rx3-
GND	C9	A9	GND
GND	B9	D9	GND
Rx2-	B8	D8	Tx2-
Rx2+	B7	D7	Tx2+
GND	B6	D6	GND
Rx0-	B5	D5	Tx0-
Rx0+	B4	D4	Tx0+
GND	B3	D3	GND
SIDEBAND	B2	B1	SIDEBAND
SIDEBAND	B1	B2	SIDEBAND
SIDEBAND	A1	A2	SIDEBAND
SIDEBAND	A2	A1	SIDEBAND
GND	A3	C3	GND
Rx1+	A4	C4	Tx1+
Rx1-	A5	C5	Tx1-
GND	A6	C6	GND
Rx3+	A7	C7	Tx3+
Rx3-	A8	C8	Tx3-
GND	A9	C9	GND

NO	TITLE	DESCRIPTION
P	InnerMold-2	PE,Transparent+UV Glue
O	H.S.T	Heat shrink tube OD:9.0mm ,black
N	FOAM	HD MiniSAS36P,CR,BLACK
M	LABEL	W40*L100mm,WHITE
L	LABEL	W11*L30mm,WHITE
K	LABEL	W15*L65mm,WHITE
J	TAPE	Acetate cloth tape,W:20mm T:0.2mm,black
I	TAPE	Acetate cloth tape,W:25mm T:0.2mm,black
H	TAPE	Acetate cloth tape,W:55mm T:0.13mm,black
G	InnerMold-1	PP ,BLACK
F	TIN	TIN STICK,TIN WIRE
E	CONN	4X HD MINI SAS STR,PA66,BLACK
D	CONN	8X HD MINI SAS STR,PA9T,BLACK
C	PCB	HD MINI SAS 36P PCB/100 ohm
B	Cable	UL2651 CABLE FLAT 30#*4C*PH0.82mm GRAY
A	Cable	UL20744 30#*2C*+2D+AL+MYLAR BLUE 12G

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±3°
.0	±0.30
.00	±0.20



CHANT SINCERE CO., LTD
 TEL:886-02-86471251 FAX:886-02-86472962

SCALE: AS SHOWN	UNIT: mm
DRAWN Riley	04/18/2019
CHECKED	/ /
APPROVED	/ /

DRAWN NAME: (PDR-18066)
 HD MINI SAS 8I to HD MINI SAS 4I Cable 2/2
 PRODUCT NO: C10C213B06E01
 FILE NAME: C10C213B06E01(GB)

REV.	DESCRIPTION	DATE	SIZE	REV.
			A4	X7

For SIP