
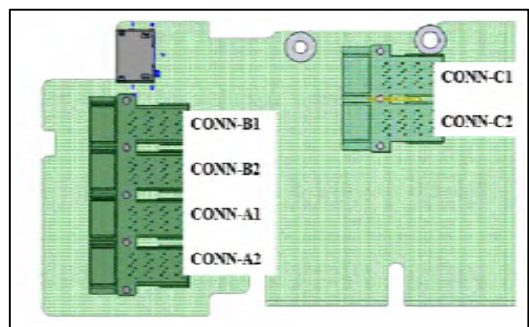



A-A並排擺放

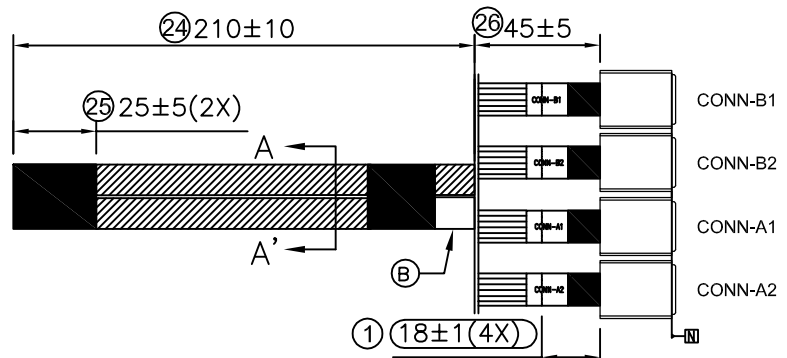

NOTE:
1.THE CABLE ASSEMBLY MEET 12G REQUIREMENT.

PART NO.

C10 C2 1 3 B07 E 01
1 2 3 4 5 6 7

- 1.SERIES NO.
C10=SATA TYPE
- 2.CONNECTOR OPTION
C2=HD Mini SAS /HD Mini SAS
- 3.CONNECTOR TYPE
1=M /M
- 4.CABLE COLOR
3=Black
- 5.TYPE.
- 6.GREEN OPTION:
E=RoHS
- 7.LENGTH.
01=625mm

Setting-out ②(基準線,落差Max 1mm)
在另一側畫黑線

B	LABEL	W40*L100mm, WHITE
A	FOAM	HD MiniSAS36P, CR, BLACK
NO	TITLE	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±3°
.0	±0.30
.00	±0.20




CHANT SINCERE CO., LTD
TEL:886-02-86471251 FAX:886-02-86472962

SCALE: AS SHOWN	UNIT: mm
DRAWN Riley	04/18/2019
CHECKED	/ /
APPROVED	/ /

DRAWN NAME: (PDR-18066)
HD MINI SAS 8I to HD MINI SAS 4I Cable 1/3
PRODUCT NO: C10C213B07E01
FILE NAME: C10C213B07E01(GB)


REV.	DESCRIPTION	DATE	SIZE A4	REV. X7
1				

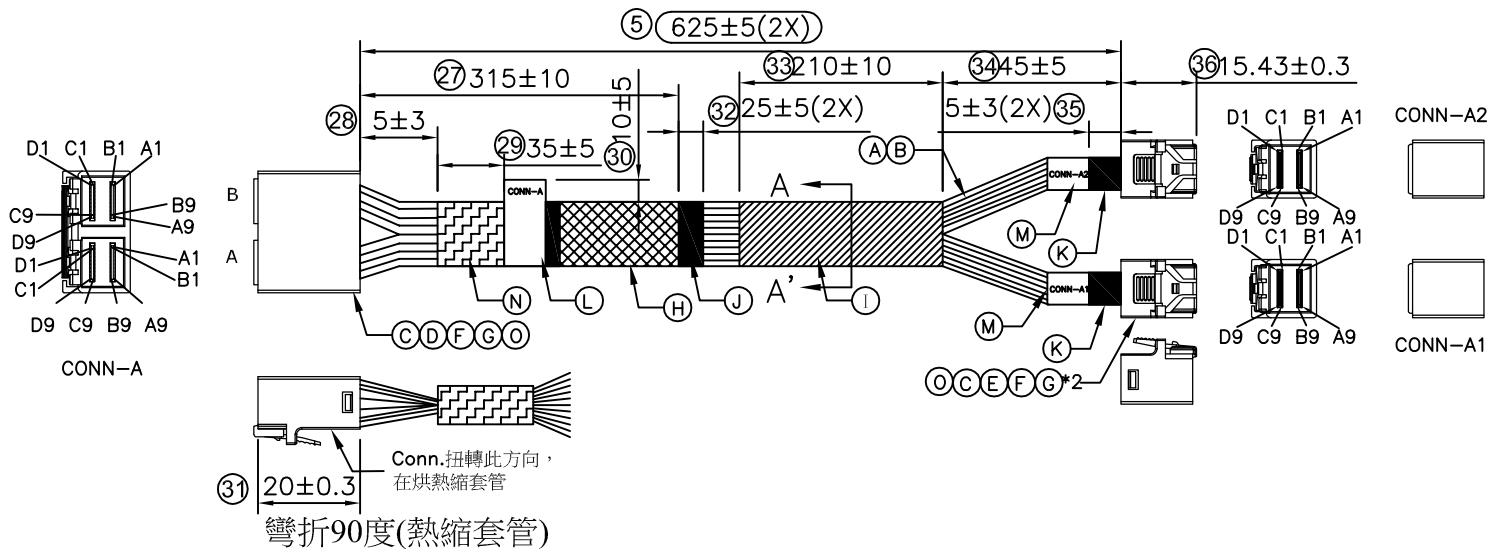

WIRING TABLE

CONN-A A/B		CONN-A1/CONN-A2	
GND	D9	B9	GND
Tx2-	D8	B8	Rx2-
Tx2+	D7	B7	Rx2+
GND	D6	B6	GND
Tx0-	D5	B5	Rx0-
Tx0+	D4	B4	Rx0+
GND	D3	B3	GND
SIDEBAND	D2	D1	SIDEBAND
SIDEBAND	D1	D2	SIDEBAND
SIDEBAND	C1	C2	SIDEBAND
SIDEBAND	C2	C1	SIDEBAND
GND	C3	A3	GND
Tx1+	C4	A4	Rx1+
Tx1-	C5	A5	Rx1-
GND	C6	A6	GND
Tx3+	C7	A7	Rx3+
Tx3-	C8	A8	Rx3-
GND	C9	A9	GND
GND	B9	D9	GND
Rx2-	B8	D8	Tx2-
Rx2+	B7	D7	Tx2+
GND	B6	D6	GND
Rx0-	B5	D5	Tx0-
Rx0+	B4	D4	Tx0+
GND	B3	D3	GND
SIDEBAND	B2	B1	SIDEBAND
SIDEBAND	B1	B2	SIDEBAND
SIDEBAND	A1	A2	SIDEBAND
SIDEBAND	A2	A1	SIDEBAND
GND	A3	C3	GND
Rx1+	A4	C4	Tx1+
Rx1-	A5	C5	Tx1-
GND	A6	C6	GND
Rx3+	A7	C7	Tx3+
Rx3-	A8	C8	Tx3-
GND	A9	C9	GND

- NOTES:
 1.P1 MOULD NO.:DM2-J701.
 2.ELECTRONIC TEST:
 2.1.100% OPEN; SHORT OR MISWIRE TEST;
 2.2.INSULATION RESISTANCE:DC300V 20M OHMS(MIN);
 2.3.CONTACT RESISTANCE:1 OHMS(MAX);
 2.4.VOLTAGE TEST:DC300V/0.01S
 3.R2E=ROHS2.0+REACH.



A-A' 並排擺放

NO	TITLE	DESCRIPTION
O	InnerMold-2	PE, Transparent+UV Glue
N	H. S. T	HEAT SHRINK TUBE OD:9.0mm , BLACK
M	LABEL	W11*L30mm, WHITE
L	LABEL	W15*L65mm, WHITE
K	TAPE	ACETATE CLOTH TAPE, W:20mm T:0.2mm, BLACK
J	TAPE	ACETATE CLOTH TAPE, W:25mm T:0.2mm, BLACK
I	TAPE	ACETATE CLOTH TAPE, W:55mm T:0.13mm, BLACK
H	N. B. T	Nylon Braided tube, BLACK
G	InnerMold-1	PP, BLACK
F	TIN	TIN STICK, TIN WIRE
E	CONN	4X HD MINI SAS STR, PA66, BLACK
D	CONN	8X HD MINI SAS STR, PA9T, BLACK
C	PCB	HD MINI SAS 36P PCB/100 ohm
B	Cable	UL2651 CABLE FLAT 30#*4C*PH0.82mm GRAY
A	Cable	UL20744 30#*2C*+2D+AL+MYLAR BLUE 12G

UNLESS OTHERWISE SPECIFIED TOLERANCE
 ANG. ±3°
 .0 ±0.30
 .00 ±0.20




CHANT SINCERE CO., LTD
 TEL:886-02-86471251 FAX:886-02-86472962

SCALE: AS SHOWN	UNIT: mm
DRAWN Riley	04/18/2019
CHECKED	/ /
APPROVED	/ /

DRAWN NAME: (PDR-18066)
 HD MINI SAS 8I to HD MINI SAS 4I Cable 2/3
 PRODUCT NO: C10C213B07E01


REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME:
			A4	X7	C10C213B07E01 (GB)

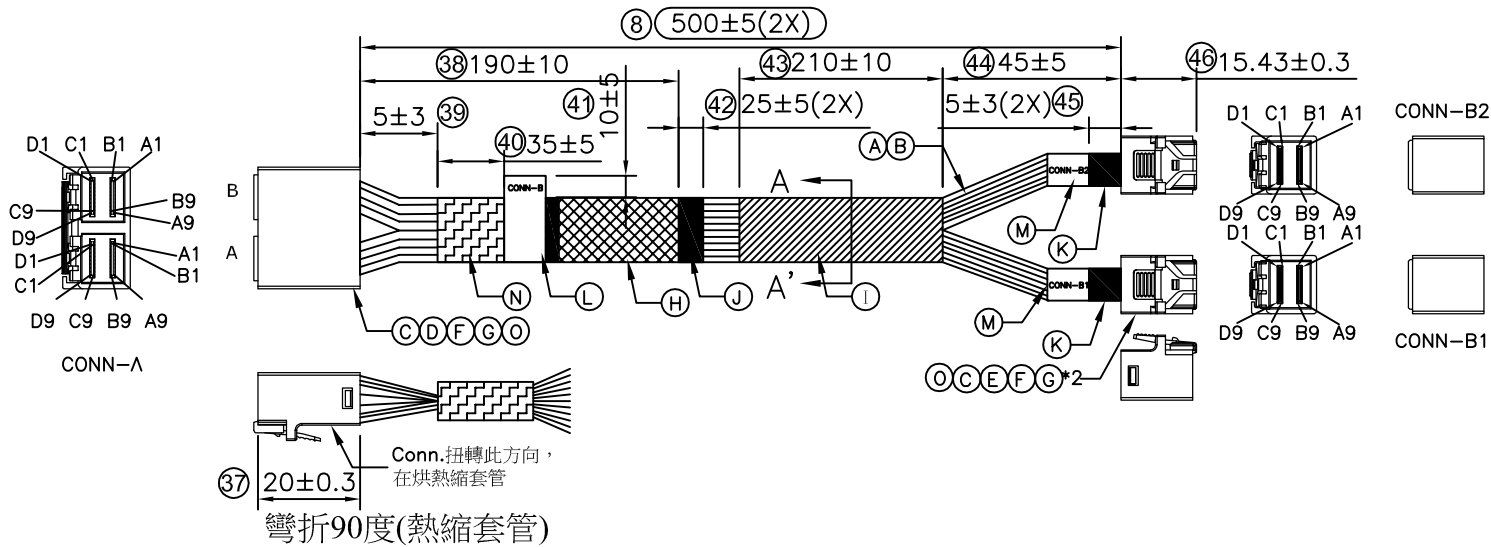

WIRING TABLE

CONN-B A/B		CONN-B1/CONN-B2	
GND	D9	B9	GND
Tx2-	D8	B8	Rx2-
Tx2+	D7	B7	Rx2+
GND	D6	B6	GND
Tx0-	D5	B5	Rx0-
Tx0+	D4	B4	Rx0+
GND	D3	B3	GND
SIDEBAND	D2	D1	SIDEBAND
SIDEBAND	D1	D2	SIDEBAND
SIDEBAND	C1	C2	SIDEBAND
SIDEBAND	C2	C1	SIDEBAND
GND	C3	A3	GND
Tx1+	C4	A4	Rx1+
Tx1-	C5	A5	Rx1-
GND	C6	A6	GND
Tx3+	C7	A7	Rx3+
Tx3-	C8	A8	Rx3-
GND	C9	A9	GND
GND	B9	D9	GND
Rx2-	B8	D8	Tx2-
Rx2+	B7	D7	Tx2+
GND	B6	D6	GND
Rx0-	B5	D5	Tx0-
Rx0+	B4	D4	Tx0+
GND	B3	D3	GND
SIDEBAND	B2	B1	SIDEBAND
SIDEBAND	B1	B2	SIDEBAND
SIDEBAND	A1	A2	SIDEBAND
SIDEBAND	A2	A1	SIDEBAND
GND	A3	C3	GND
Rx1+	A4	C4	Tx1+
Rx1-	A5	C5	Tx1-
GND	A6	C6	GND
Rx3+	A7	C7	Tx3+
Rx3-	A8	C8	Tx3-
GND	A9	C9	GND

- NOTES:
 1.P1 MOULD NO.:DM2-J701.
 2.ELECTRONIC TEST:
 2.1.100% OPEN; SHORT OR MISWIRE TEST;
 2.2.INSULATION RESISTANCE:DC300V 20M OHMS(MIN);
 2.3.CONTACT RESISTANCE:1 OHMS(MAX);
 2.4.VOLTAGE TEST:DC300V/0.01S
 3.R2E=ROHS2.0+REACH.

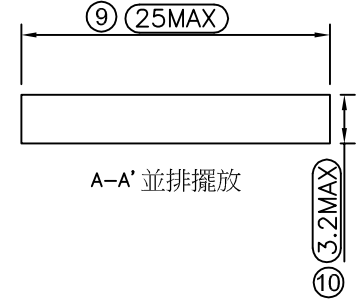

Conn.扭轉此方向，
在烘熱縮套管
彎折90度(熱縮套管)

NO	TITLE	DESCRIPTION
O	InnerMold-2	PE, Transparent+UV Glue
N	H. S. T	HEAT SHRINK TUBE OD:9.0mm , BLACK
M	LABEL	W11*L30mm, WHITE
L	LABEL	W15*L65mm, WHITE
K	TAPE	ACETATE CLOTH TAPE, W:20mm T:0.2mm, BLACK
J	TAPE	ACETATE CLOTH TAPE, W:25mm T:0.2mm, BLACK
I	TAPE	ACETATE CLOTH TAPE, W:55mm T:0.13mm, BLACK
H	N. B. T	Nylon Braided tube, BLACK
G	InnerMold-1	PP, BLACK
F	TIN	TIN STICK, TIN WIRE
E	CONN	4X HD MINI SAS STR, PA66, BLACK
D	CONN	8X HD MINI SAS STR, PA9T, BLACK
C	PCB	HD MINI SAS 36P PCB/100 ohm
B	Cable	UL2651 CABLE FLAT 30#*4C*PH0.82mm GRAY
A	Cable	UL20744 30#*2C*+2D+AL+MYLAR BLUE 12G

UNLESS OTHERWISE SPECIFIED TOLERANCE
 ANG. ±3°
 .0 ±0.30
 .00 ±0.20

SCALE: AS SHOWN UNIT: mm

DRAWN Riley 04/18/2019
 CHECKED / /
 APPROVED / /

CHANT SINCERE CO., LTD
 TEL:886-02-86471251 FAX:886-02-86472962

DRAWN NAME: (PDR-18066)
 HD MINI SAS 8I to HD MINI SAS 4I
 Cable 3/3

PRODUCT NO: C10C213B07E01

FILE NAME: C10C213B07E01 (GB)

REV.	DESCRIPTION	DATE