


NOTE:
 1.ELECTRICAL AND MECHANICAL PERFORMANCE SHALL MEET THE GEN4.0 INDUSTRIAL STANDARD.
 2.THE CABLE ASSEMBLY SHALL MEET IMPEDANCE REQUIREMENT:
 CONNECTORS:85±15% OHMS,CABLE AREA:85±10% OHMS
 3.THE CABLE ASSEMBLY SHALL BE RoSH2.0 COMPLIANT.

P1		P2	
GND	A19	C9	GND
RX3-	A18	C8	TX3-
RX3+	A17	C7	TX3+
GND	A16	C6/D9	GND
RX2-	A15	D8	TX2-
RX2+	A14	D7	TX2+
GND	A13	D6	GND
SB5	A12	D2	SB5
SB4	A11	C2	SB4
SB9	A10		
SB3	A9	B2	SB3
SB7	A8	A2	SB7
GND	A7	C6	GND
RX1-	A6	C5	TX1-
RX1+	A5	C4	TX1+
GND	A4	C3	GND
RX0-	A3	D5	TX0-
RX0+	A2	D4	TX0+
GND	A1	C3	GND
GND	B19	A9	GND
TX3-	B18	A8	RX3-
TX3+	B17	A7	RX3+
GND	B16	A6/B9	GND
TX2-	B15	B8	RX2-
TX2+	B14	B7	RX2+
GND	B13	B6	GND
SB6	B12	D1	SB6
SB2	B11	C1	SB2
SB8	B10		
SB1	B9	B1	SB1
SB0	B8	A1	SB0
GND	B7	A6	GND
TX1-	B6	A5	RX1-
TX1+	B5	A4	RX1+
GND	B4	A3/B6	GND
TX0-	B3	B5	RX0-
TX0+	B2	B4	RX0+
GND	B1	B3	GND

WIRE TABLE

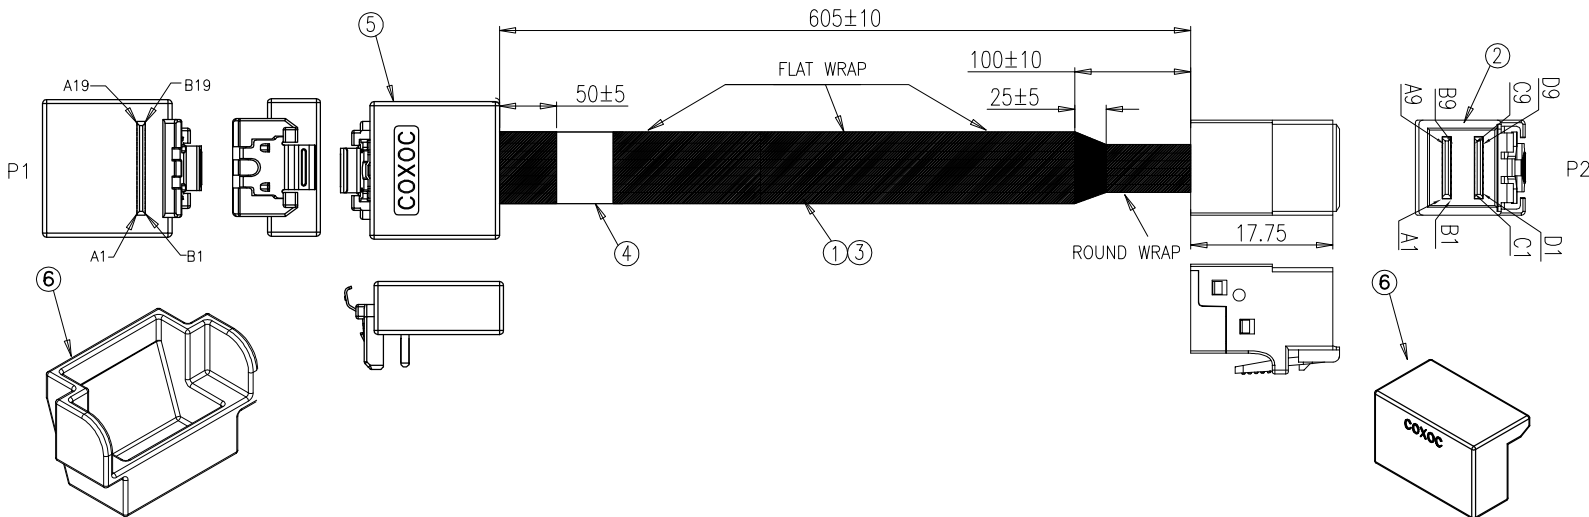


PART NO.

C10 H1 1 3 B01 E 605
 1 2 3 4 5 6 7 DETAIL LABEL

- | | |
|--|---------------------------|
| 1.SERIES NO.
C10=SATA TYPE | 4.CABLE COLOR
3=BLACK |
| 2.CONNECTOR OPTION
H1=LP SlimSAS 4X(19*2) | 5.TYPE.
3=BLACK |
| RA/HD Mini SAS 4X(9*4) | 6.GREEN OPTION:
E=RoHS |
| 3.STRCONNECTOR TYPE
1=M/M | 7.LENGTH NO.
605=605mm |

ITEM	DESCRIPTION	QTY
6	protective cover	2
5	SlimSAS 38Pin,LOW PROFILE,RIGHT ANGLE,Au30u"	A/R
4	LABEL:70*40mm,BLANK,WHITE	1
3	ACETATE TAPE, BLACK	1
2	HD MINI SAS 36POS SHORT TYPE, Au30u"	1
1	SAS Cable:UL20744(#32x2C+2*D+A+HM)*12C,Silver Plated 100 Ohm 24G	A/R

UNLESS OTHERWISE SPECIFIED TOLERANCE		 CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962 (PDR-18096)
ANG.	±1°	
.0	±0.5	
.000	±0.01	
SCALE: AS SHOWN	UNIT: mm	
DRAWN Yang	12/04/2018	DRAWN NAME: LP SLIMLSAS 4X RA TO HD MINI SAS 4X STR
CHECKED / /		PRODUCT NO. C10H113B01E605
APPROVED / /		FILE NAME: C10H113B01E605(GB)

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	X2