


NOTE:

1.THE CABLE ASSEMBLY SHOULD BE RoSH2.0 COMPLIANT.

2.THE CABLE ASSEMBLY SHALL MEET BELOW IMPEDANCE REQUIREMENT:

TERMINATION AREA:85±15% OHMS,CABLE ABSOLUTE:85±10% OHMS

3.ELECTRICAL AND MECHANICAL PERFORMANCE SHOULD MEET THE PCIE GEN4 INDUSTRIAL STANDARD.

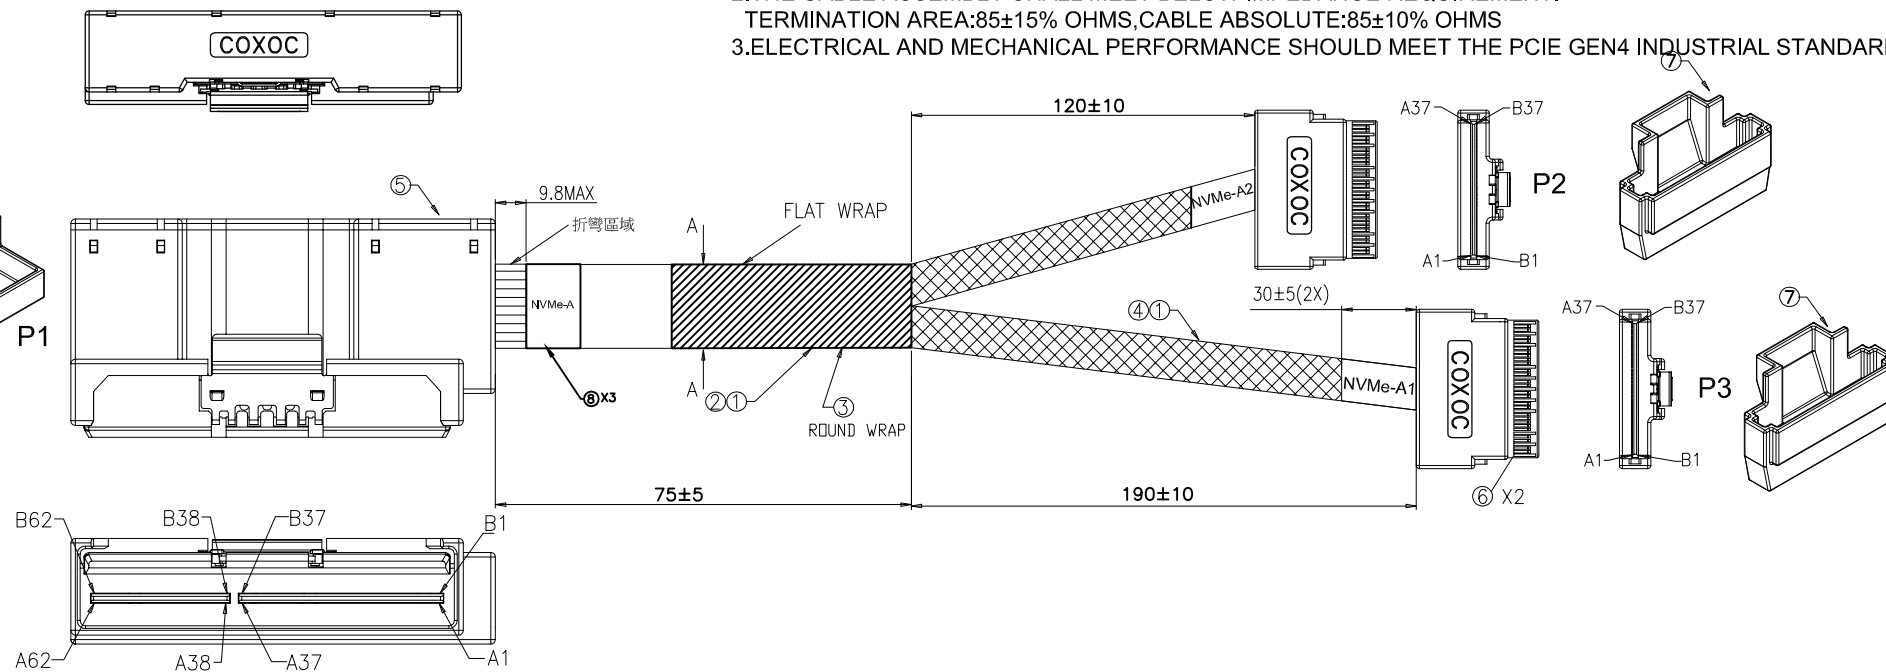

PART NO

C10 L E D 1 S D A 2 E 3 01
1 2 3 4 5 6 7 8 9 10 11 12

- 1.SERIES NO.
C10=SATA TYPE
2.CONNECTOR OPTION
L=Slimline SAS Male
3.Conn.Pin
E=16X
4.Conn.direction
D=RS
5.Conn.number
1=1PCS
6.CONNECTOR OPTION
S=Slimline SAS Male

- 7.Conn.Pin
D=8X
8.Conn.direction
A=STR
9.Conn.number
2PCS
10.GREEN OPTION:
E=RoHS
11.CABLE COLOR
3=BLACK
12.TYPE

8	Label:74*14mm, WHITE	3
7	protective cover	3
6	SLIMSAS 74P CONNECTOR,STR,Au30u"	2
5	LOW PROFILE 16X SlimSAS Right side exit PLUG,Au30u"	1
4	EXPANDO TUB:7.0mm,BLACK,SINGLE(OD7~25mm)	A/R
3	Label:Synthetic paper,70*40mm, WHITE	1
2	ACETOUS Tape, Black	A/R
1	SAS CABLE:UL20744(#32x2C+2*D+A+HM)*16C+(#32x2C+2*D+A+HM)*24C Silver Plated 85 Ohm 24G	A/R
ITEM	DESCRIPTION	QTY

UNLESS OTHERWISE
SPECIFIED TOLERANCE
ANG. ±0°
0. ±0
.0 ±0.50
.00 ±0.30

SCALE: AS SHOWED

UNIT: mm

DRAWN Yang

04/22/2019

CHECKED

/ /

APPROVED

/ /

SIZE A4

REV. X4



CHANT SINCERE CO.,LTD
TEL:886-02-86471251 FAX:886-02-86472962


DRAWN NAME: (PDR-18094)

LP X16 SlimSAS RS TO 2X X8 SlimSAS STR

PRODUCT NO. C10LED1SDA2E301

FILE NAME: C10LED1SDA2E301(GB)

REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME
1			A4	X4	C10LED1SDA2E301(GB)

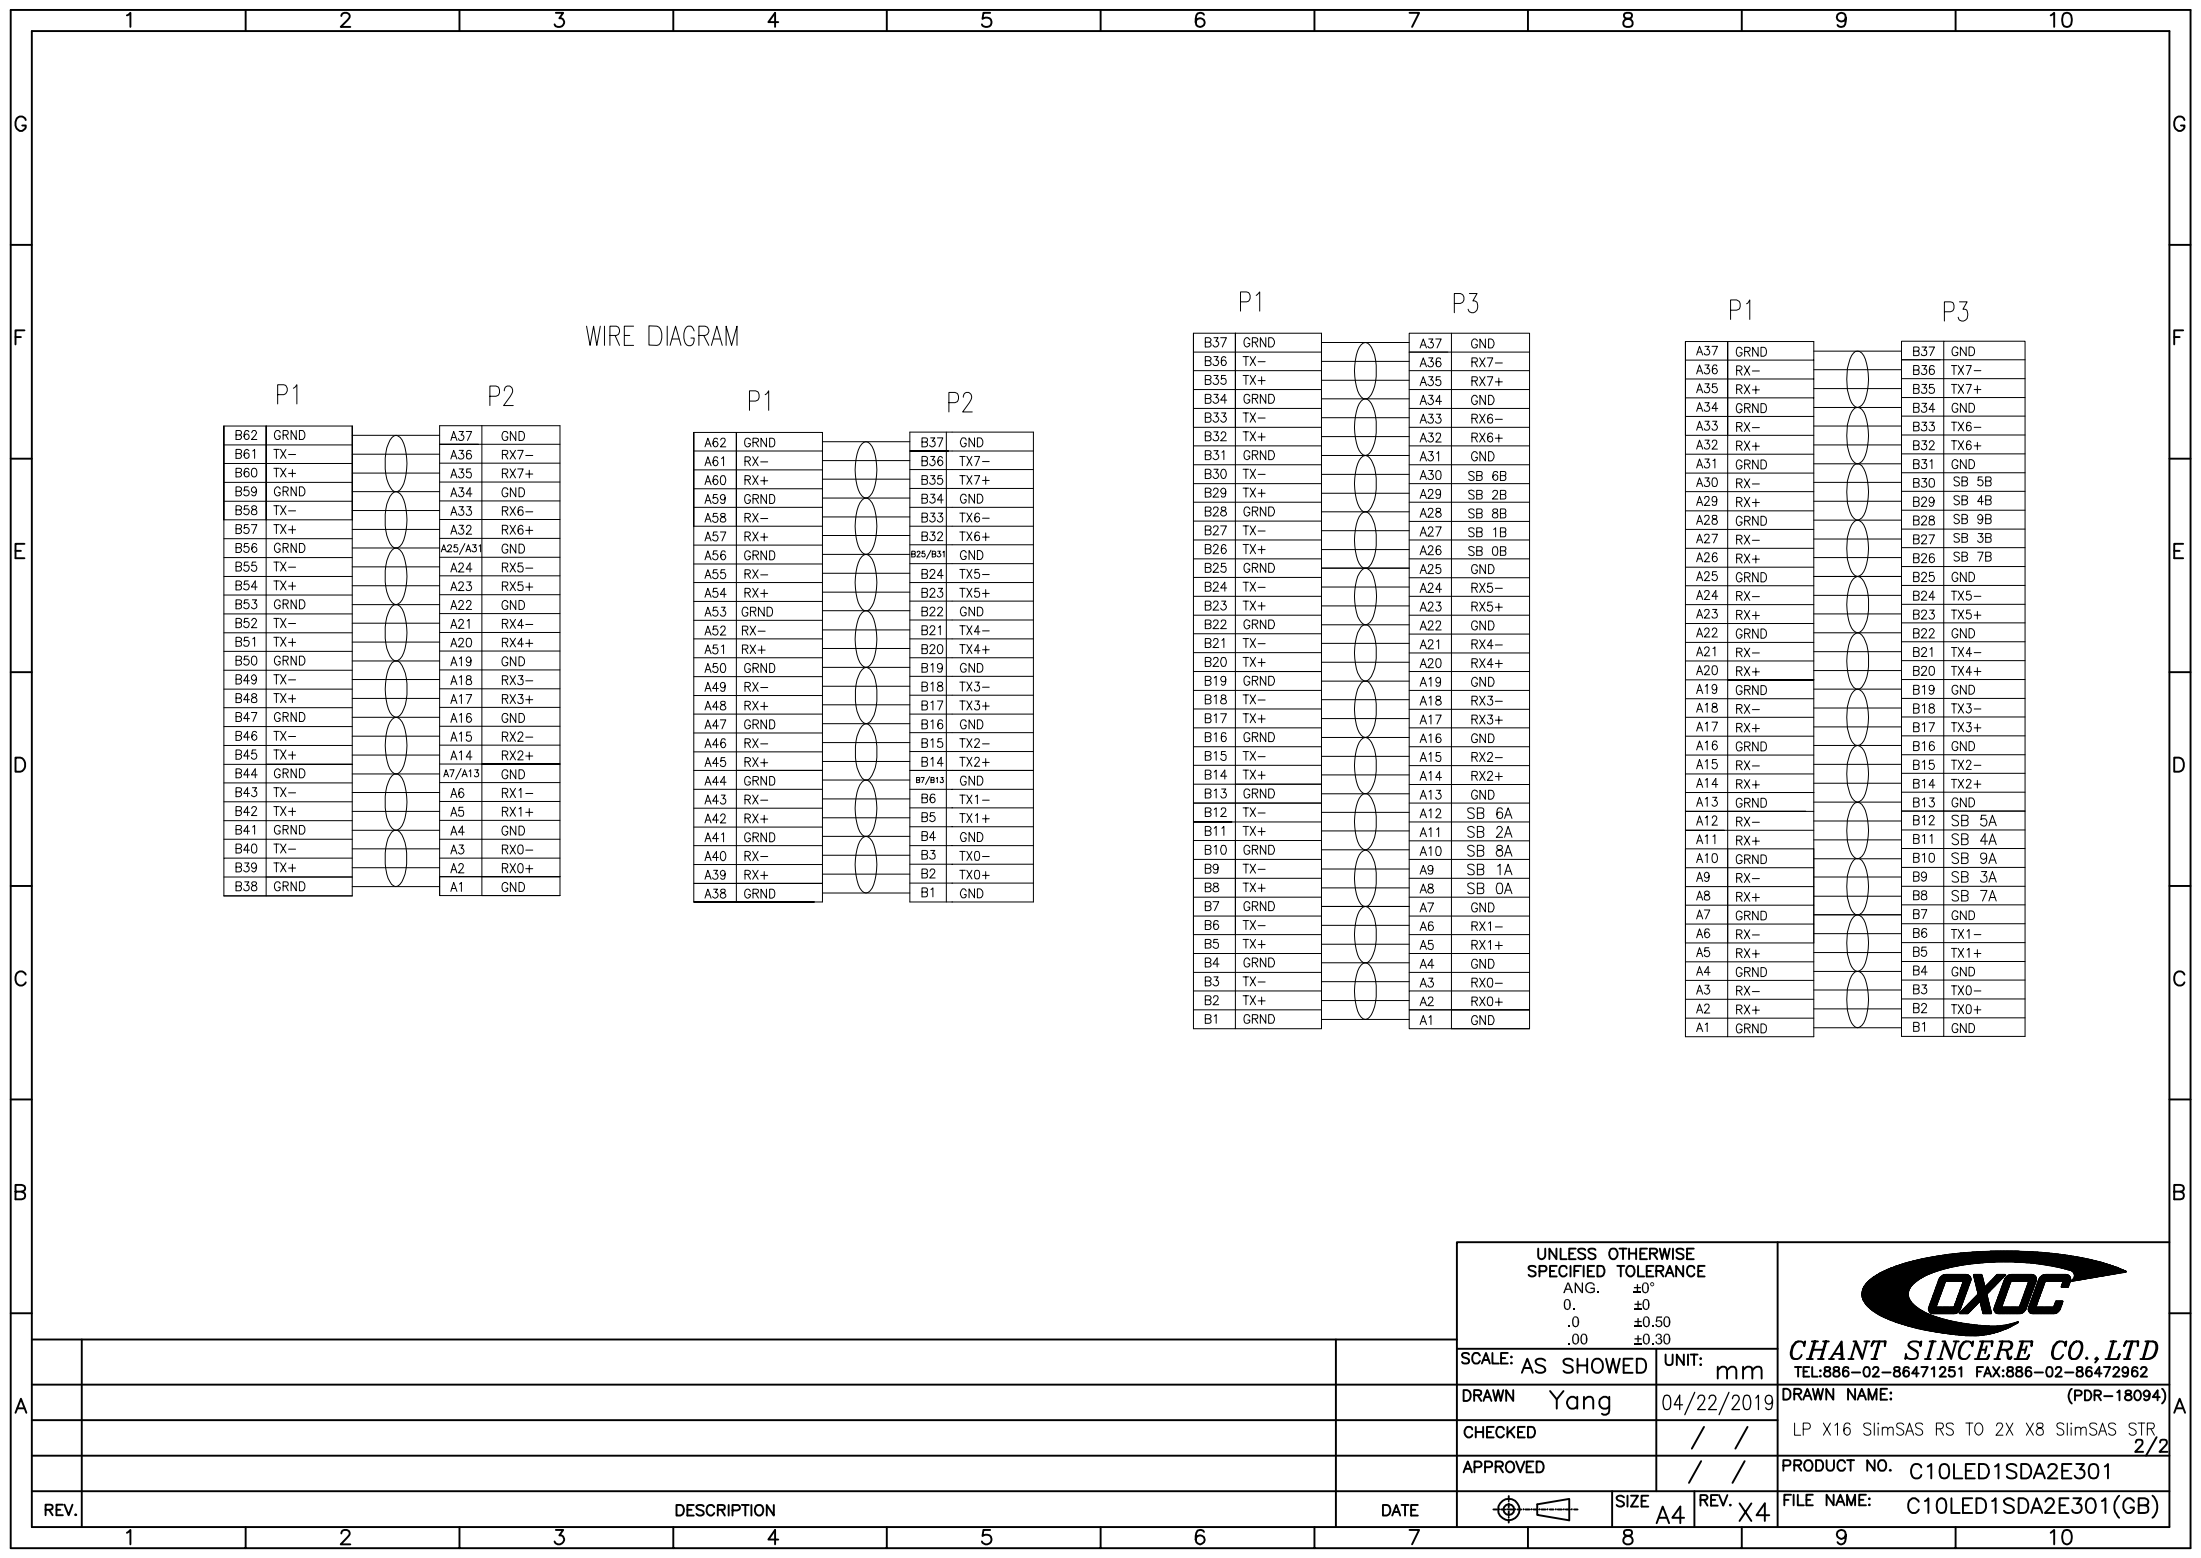

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG.	±0°
0.	±0
.0	±0.50
.00	±0.30

SCALE: AS SHOWN	UNIT: mm
DRAWN Yang	04/22/2019
CHECKED	/ /
APPROVED	/ /

SIZE A4	REV. X4
---------	---------



CHANT SINCERE CO., LTD
TEL:886-02-86471251 FAX:886-02-86472962

DRAWN NAME: (PDR-18094)

LP X16 SlimSAS RS TO 2X X8 SlimSAS STR 2/2

PRODUCT NO. C10LED1SDA2E301

FILE NAME: C10LED1SDA2E301(GB)