
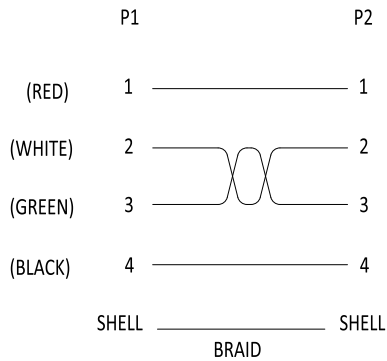


SPECIFICATION

ELECTRICAL CHARACTERISTIC:

- 100% OPEN SHORT MIS-WIRE TEST
- CONTACT RESISTANCE 3 Ω MAX.
- INSULATION RESISTANCE 10 MΩ MIN.
- HIPOT TEST DC 300V 10MS


3	PVC 45P 黑色	12G
2	USB A/M G/F 白膠芯	2PCS
1	UL2725 #28/1P+#24/2C+AEB(AL) OD: 4.5 BLACK	1PCS

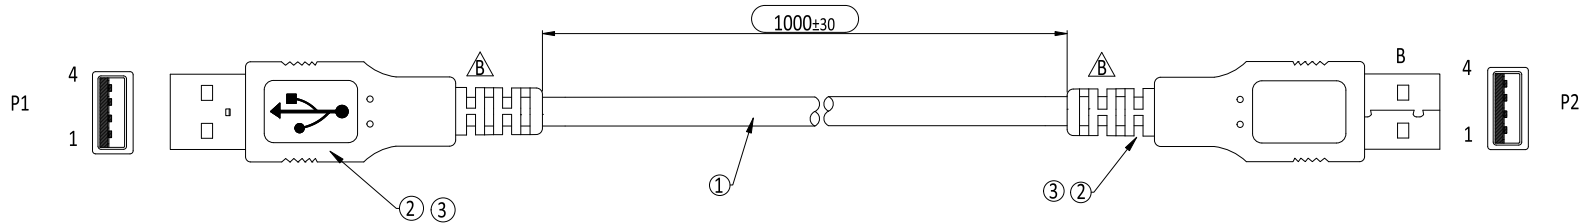

ITEM	DESCRIPTION	Q'TY
------	-------------	------

	C	ECN-2411096(KITA)NEW P/N	25NOV2024
	B	ECN-2208040(CATHERINE)MODIFY SR	03AUG2022
	A	ECN-192001(HAO)	31JAN2019

ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4

2						
1	13104040010	C80783B11E1M0	1000±30mm			
ITEM	NEW P/N	OLD P/N	L (LENGTH)	NOTE		
UNLESS OTHERWISE SPECIFIED TOLERANCE		 SIP	 CHANT SINCERE CO.,LTD			
X. ±1.00		 Cmk Cpk				
.X. ±0.50						
.XX ±0.10						
.XXX ±0.05						
SCALE: AS SHOWN		UNIT: mm	TITLE: USB AM/AM			
DRAWN: XINGRU_LAI		25 Nov 2024				
CHECKED: PEARL_HUNG		28 Nov 2024				
APPROVED: PEARL_HUNG		28 Nov 2024				
		SIZE A4	SHEET 1/1	REV. C	PART NO. 13104040010	
7		8		9		10