


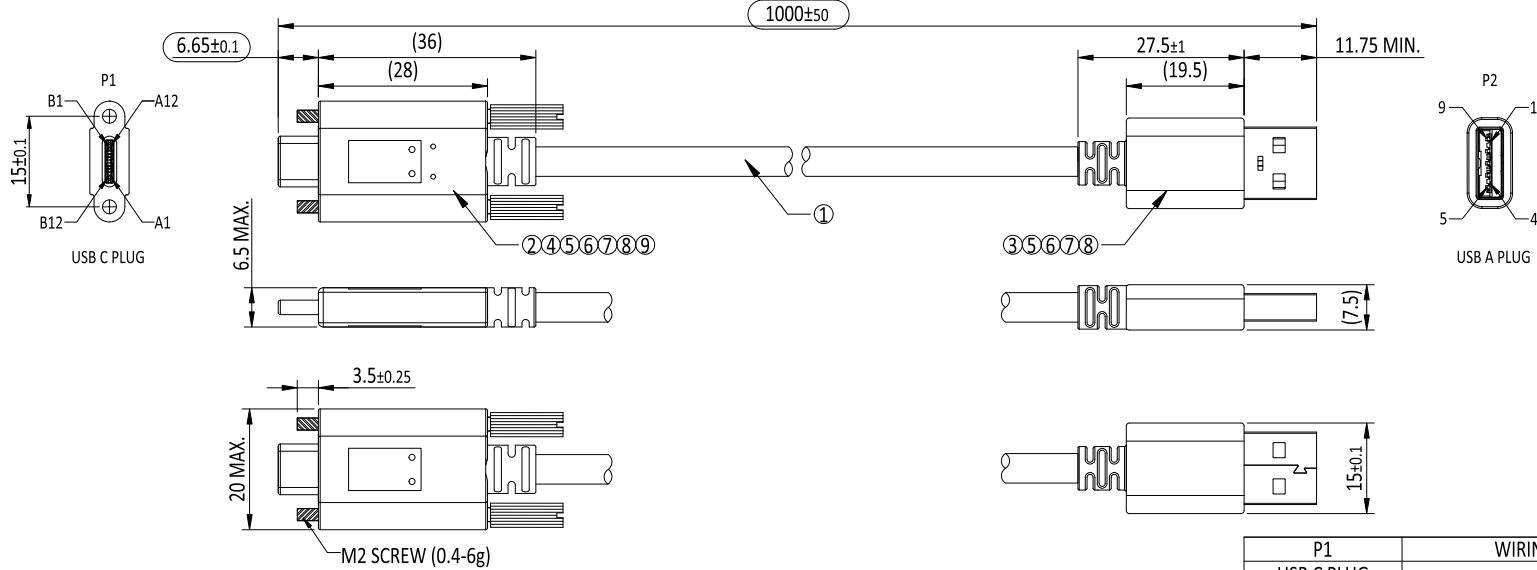



SPECIFICATION
ELECTRICAL CHARACTERISTIC:
1. FINISHED CABLE MUST BE OPEN, SHORT, MISWIRE 100% TEST
2. VOLTAGE: 300 V DC
3. CONTACT RESISTANCE: 5 Ω MAX.
4. INSULATION RESISTANCE: 2 MΩ MIN.
5. VOLTAGE DROP: VBUS 500 mV, GND 250 mV

9	SCREW	SCREW BLACK ZINC PLATING
8	OVER MOLD	PVC COLOR BLACK
7	INNER MOLD	PE
6	FOIL	COPPER FOIL
5	TIN	TIN STICK
4	PCBA	TYPE C PCBA (W/ RESISTOR RP 56K Ω, CAPACITOR 10nF)
3	CONN. P2	USB3.1 A MALE, BLUE INSULATOR, CONTACT PLATING AU 30u", SHELL PLATED NI, W/SN PLATED
2	CONN. P1	USB C PLUG, BLACK INSULATOR, CONTACT PLATING AU 30u", SHELL PLATED NI (EXTRUDED SHELL), W/SN PLATED
1	CABLE	USB3.1 UL20276 #30/30/24 ADB OD: 4.8mm, BLACK PVC JACKET
ITEM	PART	DESCRIPTION


	B	ECN-2403042(JOLIN) ADD NEW P/N		14MAR2024	
	A	ECN-2301026(JACKY_CHANG)NEW ADD FRAME		12DEC2022	
ZONE	REVISION	DESCRIPTION		DATE	

P1		WIRING DIAGRAM			P2	
USB C PLUG		WIRE			USB A PLUG	
PIN	SIGNAL NAME	WIRE NUMBER	SIGNAL NAME	WIRE COLOR	PIN	SIGNAL NAME
A1, B1 A12, B12	GND	1 7, 10	GND_PWRrt1 SDP1_DRAIN, SDP2_DRAIN	BLACK SDP1+SDP2 DRAIN	4 7	GND GND_DRAIN
A4, B4 A9, B9	VBUS	2	PWR_VBUS1	RED	1	VBUS
A5	CC	W/RESISTOR				
B5	VCONN	N/A				
A6	DP1	3	UTP_DP	GREEN	3	D +
A7	DN1	4	UTP_DN	WHITE	2	D -
A2	SSTXP1	5	SDPP1	YELLOW	6	STDA_SSRX+
A3	SSTXN1	6	SDPN1	BLUE	5	STDA_SSRX-
B11	SSRXP1	8	SDPP2	ORANGE	9	STDA_SSTX+
B10	SSRXN1	9	SDPN2	PURPLE	8	STDA_SSTX-
SHELL	SHIELD	BRIAD	SHIELD	BRIAD	SHELL	SHIELD


1	13301030010		C8F1K3A18AE1M0		1000±50mm		
ITEM	NEW P/N		OLD P/N		LENGTH		NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±2° 0. ±0.50 0. ±0.30 .00 ±0.20			 SIP  Cmk Cpk		 CHANT SINCERE CO.,LTD		
SCALE: AS SHOWN		UNIT: mm		TITLE: PDR-21075 USB TYPE-C TO AM 3.1 CABLE (WITH DUAL SCREW)			
DRAWN: HOLLY_TU		19 Mar 2024					
CHECKED: PEARL_HUNG		20 Mar 2024					
APPROVED: PEARL_HUNG		20 Mar 2024		PART NO. 1330103XXXX		C	
	SIZE A4	SHEET 1/2	REV. B		CODE: GB	CUSTOMER:	

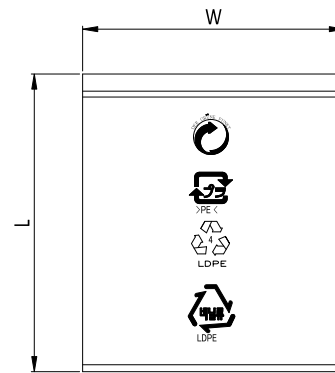


ZIP BAG: L203xW165xT0.05mm

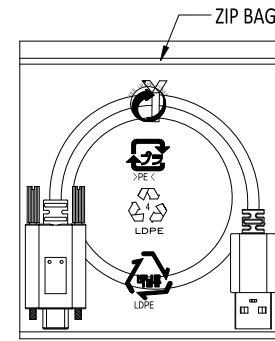


1PC CABLE/ZIP BAG

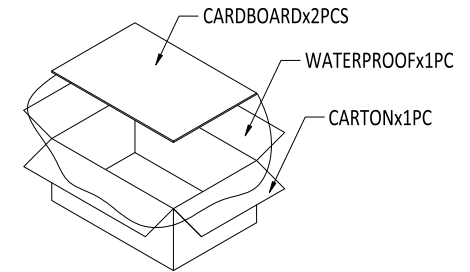

(CARTON: L457xW298xH228mm, MATERIAL K=K)

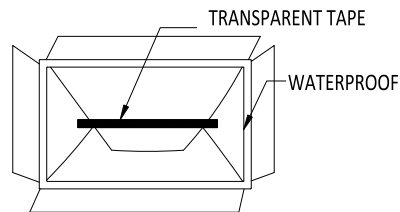


(AFTER THE INSTALLED PRODUCT,
CARTON SEALING TAPE SHOULD BE TRANSPARENT)

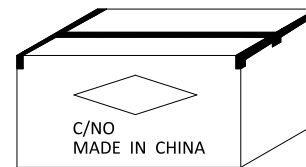

(CARTON: L457xW298xH228mm, MATERIAL K=K)
(PACKAGE BY SI FACTORY)

PO NO:	
ITEM NO:	
QTY:	PCS
N.W. :	KGS
G.W. :	KGS
MEAS:	1.1'

(CARTON SIDE)

						UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. $\pm 2^\circ$ 0. ± 0.50 .0 ± 0.30 .00 ± 0.20		 SIP  Cmk Cpk	 CHANT SINCERE CO.,LTD	
						SCALE: AS SHOW		UNIT: mm		
						DRAWN: HOLLY_TU		19 Mar 2024	TITLE: PDR-21075 USB TYPE-C TO AM 3.1 CABLE (WITH DUAL SCREW)	
	B	ECN-2403042(JOLIN) ADD NEW P/N			14MAR2024	CHECKED: PEARL_HUNG		20 Mar 2024		
	A	ECN-2301026(JACKY_CHANG)NEW ADD FRAME			12DEC2022	APPROVED: PEARL_HUNG		20 Mar 2024	PART NO. 1330103XXXX C	
ZONE	REVISION	DESCRIPTION			DATE	  SIZE A4	SHEET 2/2	REV. B	CODE: GB	CUSTOMER:
1	2	3	4	5	6	7		8	9	10