

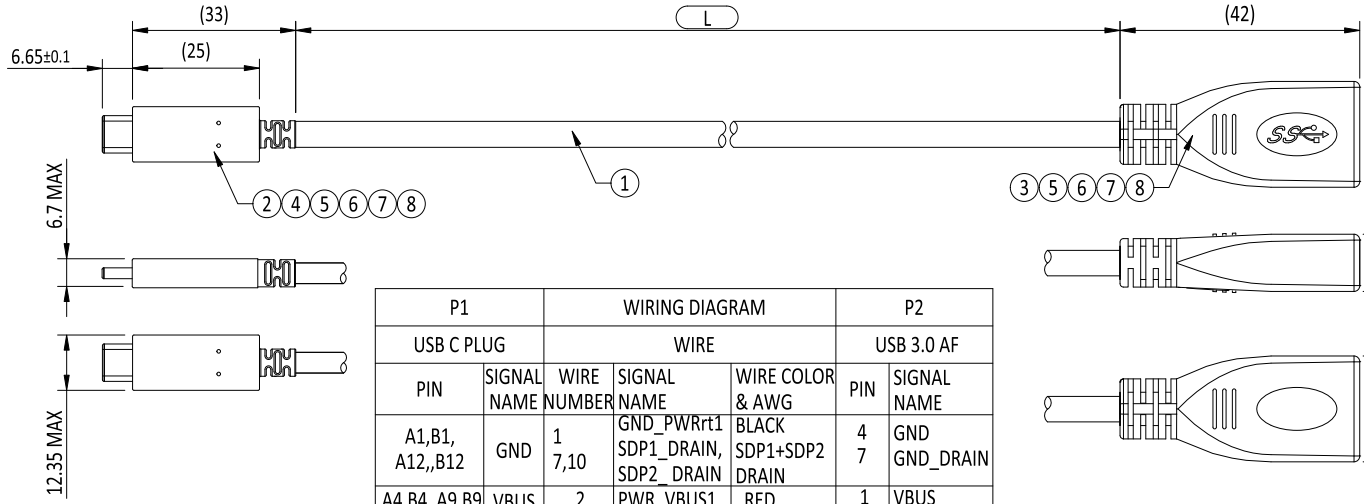


RoHS compliant



P1		WIRING DIAGRAM				P2	
USB C PLUG		WIRE				USB 3.0 AF	
PIN	SIGNAL NAME	WIRE NUMBER	SIGNAL NAME	WIRE COLOR & AWG	PIN	SIGNAL NAME	
A1,B1, A12,,B12	GND	1 7,10	GND_PWRrt1 SDP1_DRAIN, SDP2_DRAIN	BLACK SDP1+SDP2 DRAIN	4 7	GND GND_DRAIN	
A4,B4, A9,B9	VBUS	2	PWR_VBUS1	RED	1	VBUS	
A5	CC	W/RESISTOR					
B5	VCONN	N/A					
A6	Dp1	3	UTP_Dp	GREEN	3	D+	
A7	Dn1	4	UTP_Dn	WHITE	2	D-	
A2	SSTXp1	5	SDPp1	YELLOW	9	StdA_SSTX+	
A3	SSTXn1	6	SDPn1	BLUE	8	StdA_SSTX-	
B11	SSRXp1	8	SDPp2	ORANGE	6	StdA_SSRX+	
B10	SSRXn1	9	SDPn2	PURPLE	5	StdA_SSRX-	
SHELL	SHIELD	BRIAD	SHIELD	BRIAD	SHELL	SHIELD	



SPECIFICATION
 ELECTRICAL CHARACTERISTIC:
 1. CABLE ASSEMBLY MUST BE RoHS COMPLIANT
 2. CABLE MUST BE OPEN, SHORT, MISWIRE 100% TEST
 3. USB CABLE ELECTRIC TEST:
 VOLTAGE: 300 V DC
 CONTACT RESISTANCE: 5 Ω MAX.
 INSULATION RESISTENCE: 2 MΩ MIN.

8	OVER MOLD	PVC COLOR BLACK	2
7	INNER MOLD	PE	2
6	FOIL	COPPER FOIL	2
5	SN	SN STICK, SN WIRE	2
4	PCBA	PCBA, W/RESISTOR(Rd 5.1K Ω), CAPACITOR 10nF	2
3	CONN P2	USB 3.0 AF, BLUE INSULATOR, CONTACT PLATING: AU 30u", SHELL PLATED NI	1
2	CONN P1	USB C PLUG, BLACK INSULATOR, CONTACT PLATING: AU 30u" SHELL PLATED NI(EXTRUDED SHELL), (W/SN PLATE)	1
1	CABLE	USB3.1 UL20276 30/30/26 ADB OD: 4.8mm, BLACK PVC JACKET	A/R
ITEM	PART	DESCRIPTION	Q'TY


1	13303010010	1200±30mm	
ITEM	P/N	L (LENGTH)	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE		SIP Cmk Cpk	 CHANT SINCERE CO.,LTD
ANG. ±1.00 0. ±0.50 .00 ±0.25		SCALE: AS SHOWN UNIT: mm	
DRAWN: KEVIN_ZHENG		12 Feb 2026	TITLE: PDR-14096
CHECKED: PEARL_HUNG		03 Mar 2026	USB C PLUG TO USB3.0 AF CABLE
APPROVED: PEARL_HUNG		03 Mar 2026	PART NO. 1330301XXXX
SIZE A4 SHEET 1/2		REV. A	CODE: Z13 CUSTOMER:

A		ECN-2512122(JOAN)NEW DRAWN	30DEC2025
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
1	2	3	4


RoHS
compliant

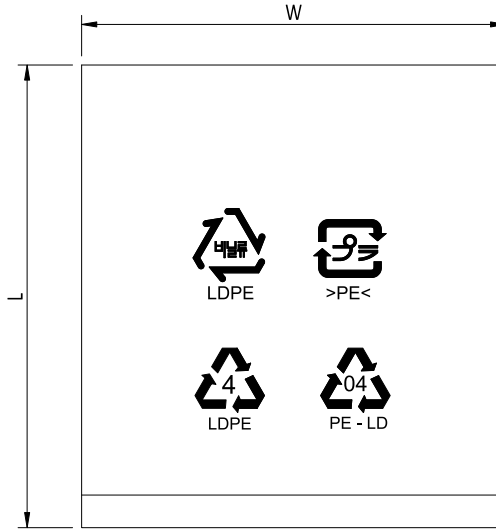


PE BAG:
L150*W130*T0.05mm (FOR ≤1M0)
L203*W165*T0.05mm (FOR >1M0)

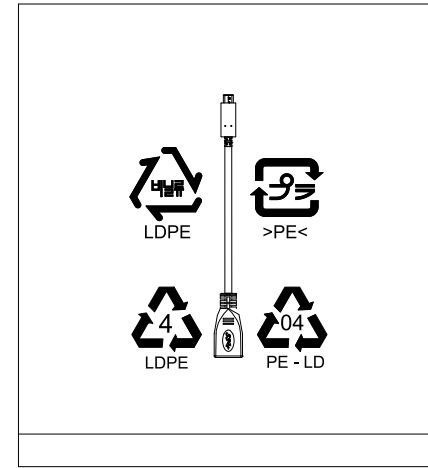


1 PC CABLE/PE BAG

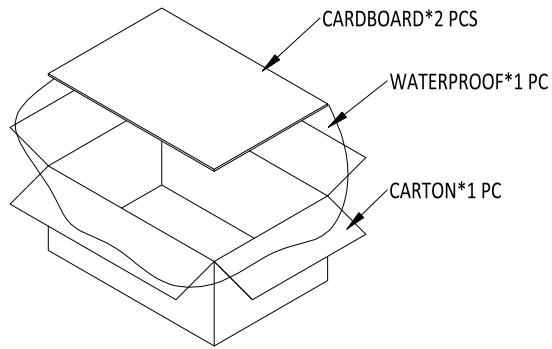

CARTON: L457*W298*H228mm
(MATERIAL K=K)

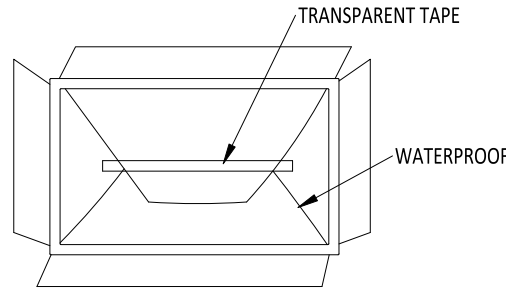

AFTER PACKING, WATERPROOF BAG SEALED WITH A TAPE
(裝好產品後, 防水袋需用透明膠紙封口)

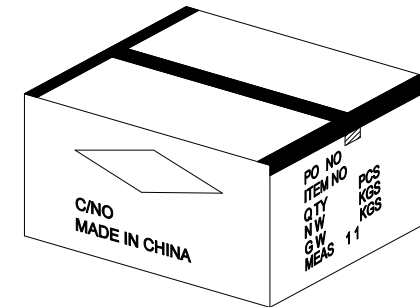

150 PCS/CARTON (FOR ≤1M0)
100 PCS/CARTON (FOR >1M0)

UNLESS OTHERWISE SPECIFIED TOLERANCE		SIP Crmk Cpk		 CHANT SINCERE CO.,LTD	
ANG.	±1.00 ±0.50 ±0.25	SCALE:	AS SHOWN		
DRAWN:	KEVIN_ZHENG	12 Feb 2026		TITLE: PDR-14096	
CHECKED:	PEARL_HUNG	03 Mar 2026		USB C PLUG TO USB3.0 AF CABLE	
APPROVED:	PEARL_HUNG	03 Mar 2026		PART NO.	1330301XXXX
ZONE	REVISION	DESCRIPTION	DATE	CODE:	Z13
1	2	3	4	CUSTOMER:	

1	2	3	4	5	6	7	8	9	10
G	F	E	D	C	B	A			