


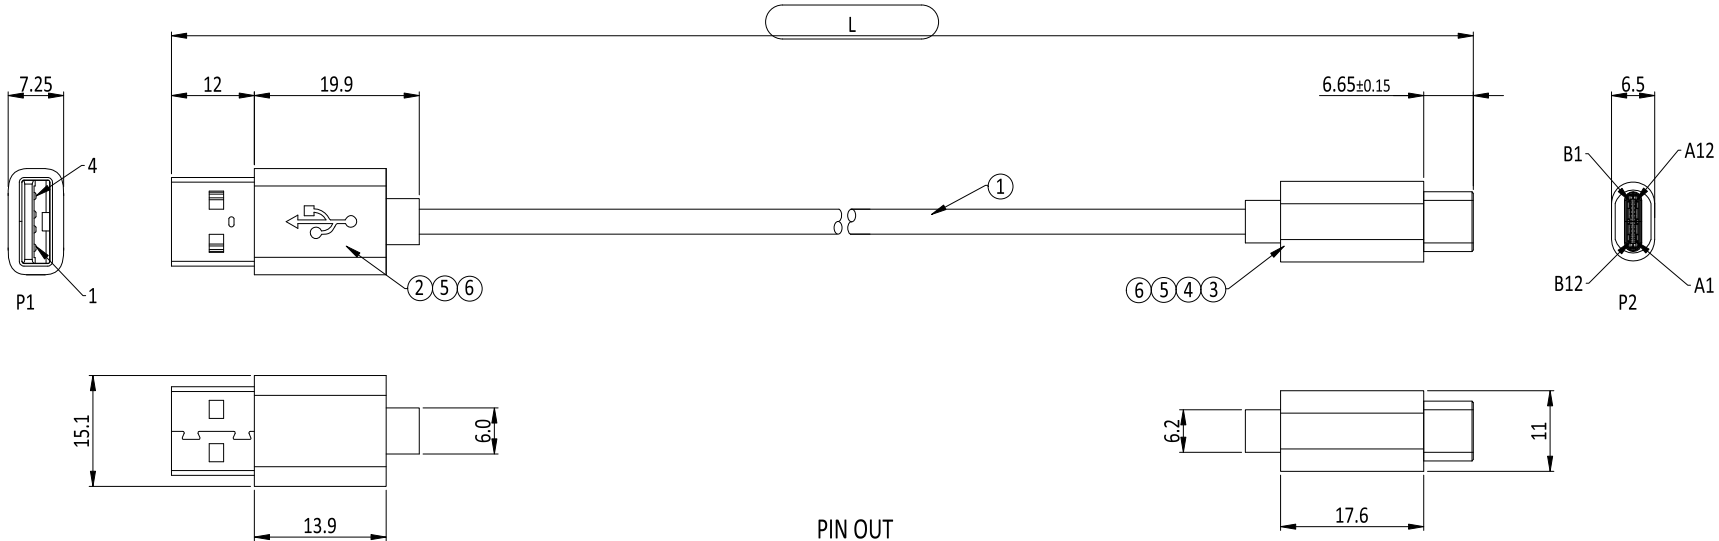


PIN OUT

P1(USB A/M)	COLOR	P2(TYPE C)
1	RED(VBUS)	A4+B4+A9+B9
2	WHITE(D-)	56KΩ
3	GREEN(D+)	A5
4	BLACK(GND)	A7
SHELL	GROUND	A6
		A1+B1+A12+B12
		SHELL


- NOTE:
- CABLE MUST BE OPEN. SHORT, MISWIRE 100% TEST
 - USB ELECTRIC TEST:
 - VOLTAGE: 300V DC
 - CONTACT RESISTANCE: 5 Ω MAX.
 - INSULATION RESISTANCE: 3 MΩ MIN.

6	OVER MOLD	PVC COLOR BLACK 45P 94V-0	G	A/R
5	INNER MOLD	PE	G	A/R
4	OVER MOLD	PVC COLOR BLACK 45P 94V-0	G	A/R
3	CONNECTOR	USB2.0 TYPE C, INSULATOR: BLACK, CONTACT: PLATED G/F, SHELL: PLATED NI STRECH SEAN SHELL: 56KΩ±10%	PCS	1
2	CONNECTOR	USB2.0 A, INSULATOR: BLACK, CONTACT: PLATED G/F, SHELL: PLATED NI	PCS	1
1	CABLE	USB CABLE AL+B, 30AWG*1P+24AWG*2C+AL+D OD3.8mm PVC JACKET: BLACK	PCS	1000mm
ITEM	PART	DESCRIPTION	UNIT	Q'TY


	D	ECN-2411110(KITA)NEW P/N	27NOV2024
	C	ECN-2208011(CANDY)CHANGE OUTLINE	08AUG2022
	B	ECN-2207007(POYA)CHANGE OUTLINE	05JUL2022
ZONE	REVISION	DESCRIPTION	DATE

2				
1	13325030010	C8F2K3A10E1M0	1000±30mm	
ITEM	NEW P/N	OLD P/N	L (LENGTH)	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE		SIP	 CHANT SINCERE CO.,LTD	
		ST Cmk Cpk		
SCALE: AS SHOWN		UNIT: mm		
DRAWN: XINGRU_LAI		02 Dec 2024	TITLE: USB2.0AM TO TYPE C	
CHECKED: RITA_CHANG		03 Dec 2024		
APPROVED: RITA_CHANG		03 Dec 2024	PART NO. 13325030010	
 SIZE A4 SHEET 1/2		REV. D	CODE: L11 CUSTOMER:	


RoHS
compliant




线绕圆型, 2圈

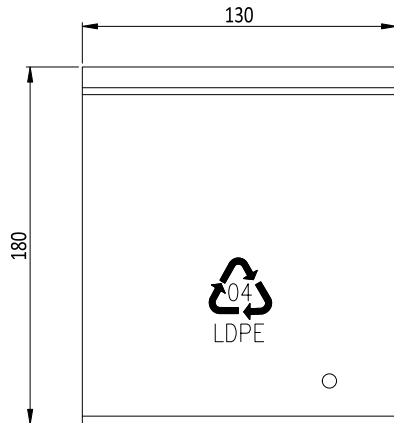


平口印刷PE BAG 130x180mm

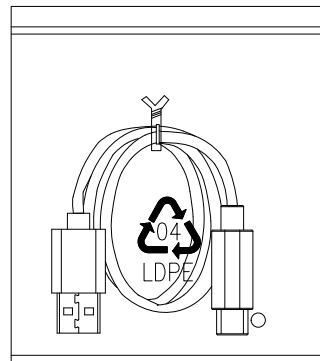

1PC/PE BAG

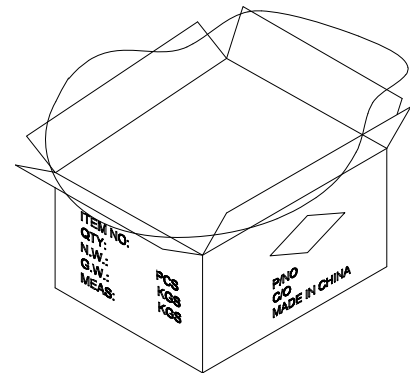

防水袋: 0.35x700+170mmx900mm
纸箱: L: 475mmx298mmx228mm
200PCS/CTN



纸箱封工字形，填写净重，毛重，装箱数量，等等

	D	ECN-2411110(KITA)NEW P/N	27NOV2024
	C	ECN-2208011(CANDY)SEE PAGE 1/2	08AUG2022
	B	ECN-2207007(POYA)NEW DWG	05JUL2022
ZONE	REVISION	DESCRIPTION	DATE

UNLESS OTHERWISE SPECIFIED TOLERANCE		SIP Cmk Cpk	 CHANT SINCERE CO.,LTD	
SCALE:	AS SHOWN	UNIT:		
DRAWN:	XINGRU_LAI	02 Dec 2024	TITLE:	
CHECKED:	RITA_CHANG	03 Dec 2024	USB2.0AM TO TYPE C	
APPROVED:	RITA_CHANG	03 Dec 2024	PART NO.	13325030010
	SIZE A4	SHEET 2/2	REV. D	CUSTOMER: