
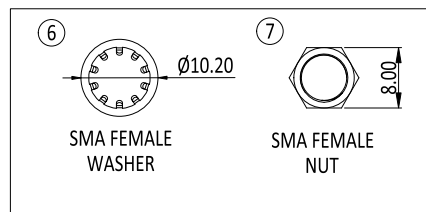

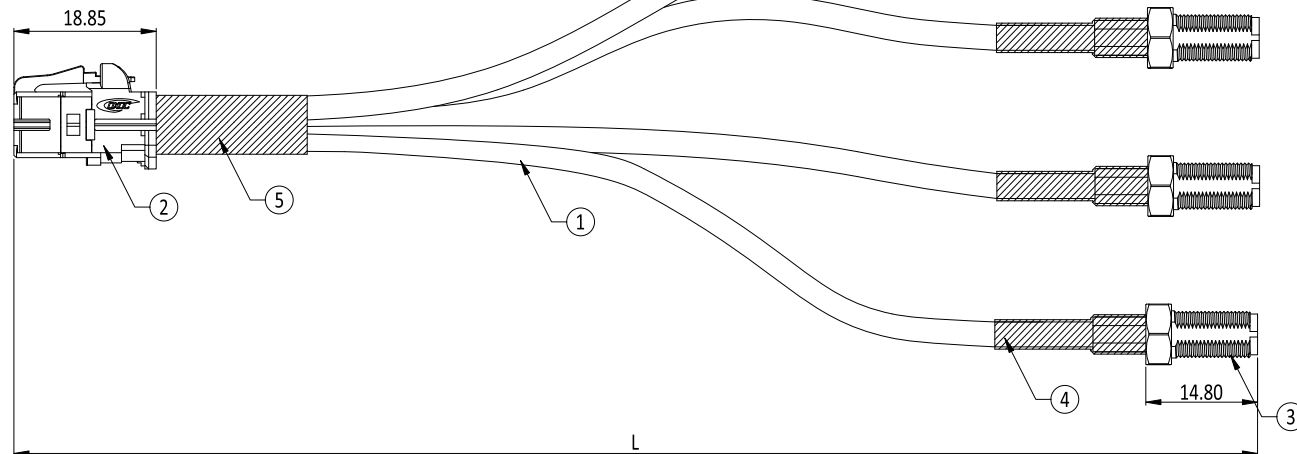


RoHS
compliant



SPECIFICATION
ELECTRICAL CHARACTERISTIC:
1. CHARACTERISTIC IMPEDANCE: 50 Ω
2. FINISHED CABLE 100% CONDUCTIVITY TEST

ENVIRONMENTAL :
1. OPERATING TEMPERATURE RANGE: -40°C TO +105°C

7	NUT	BRASS, AU PLATED	1
6	WASHER	BRASS, AU PLATED	1
5	HST	HEAT SHRINK TUBE, ID: 8.0, BLACK	1
4	HST	HEAT SHRINK TUBE, ID: 5.0, BLACK	4
3	SMA JACK	TEFLON UL94V-0, 1u" AU	4
2	MINI FAKRA B 2x2 JACK	PBT UL94V-0, 30u" AU	1
1	CABLE	031 CABLE : 22AWG COAXIAL+AL+MYLAR+BRAID, OD:3.2mm, JACKET: PVC BLACK	A/R
ITEM	DESCRIPTION	MATERIAL	Q'TY








	A	ECN-2308066(JOLIN)NEW DRAWN	28AUG2023
ZONE	REVISION	DESCRIPTION	DATE


X=CODING(SEE PAGE 2/2)

1	1424302001X	C7S8FXX3A0XE1M0	1000±30mm	
ITEM	NEW P/N	OLD P/N	L (LENGTH)	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±5° 0. ±0.50 0. ±0.30 .00 ±0.20		SIP CmK Cpk	 CHANT SINCERE CO.,LTD	
SCALE: 2:1		UNIT: mm		
DRAWN: BENSON_ZHENG		30 08 2023	TITLE: PDR-20032	
CHECKED: WEIWEI_CHANG		31 08 2023	MINI FAKRA B 2x2 JACK TO SMA JACK x4 CABLE	
APPROVED: JASON_HUANG		12 09 2023	PART NO.	1424302XXXX
	SIZE A4	SHEET 1/2	REV. A	CODE: GC
			CUSTOMER:	

RoHS
compliant



A	B	C	D	E	F	Z
JET BLACK SIM. 9005	PURE WHITE SIM. 9010	LIGHT BLUE SIM. 5012	CLARET VIOLET SIM. 4004	MAY GREEN SIM. 6017	NUT BROWN SIM. 8011	WATER BLUE SIM. 5021
						

UNLESS OTHERWISE SPECIFIED TOLERANCE		 SIP		 CHANT SINCERE CO.,LTD	
ANG. ±5°		 Cmk			
0. ±0.50		Cpk			
0. ±0.30					
.00 ±0.20					
SCALE: 2:1		UNIT: mm			
DRAWN: BENSON_ZHENG		30 08 2023		TITLE: PDR-20032	
CHECKED: WEIWEI_CHANG		31 08 2023		MINI FAKRA B 2x2 JACK TO SMA JACK x4 CABLE	
APPROVED: JASON_HUANG		12 09 2023		PART NO. 1424302XXXX	
		SIZE A4 SHEET 2/2		REV. A	
7		8		9	
				10	

	A	ECN-2308066(JOLIN)NEW DRAWN			28AUG2023				
ZONE	REVISION	DESCRIPTION			DATE				