



RoHS
compliant

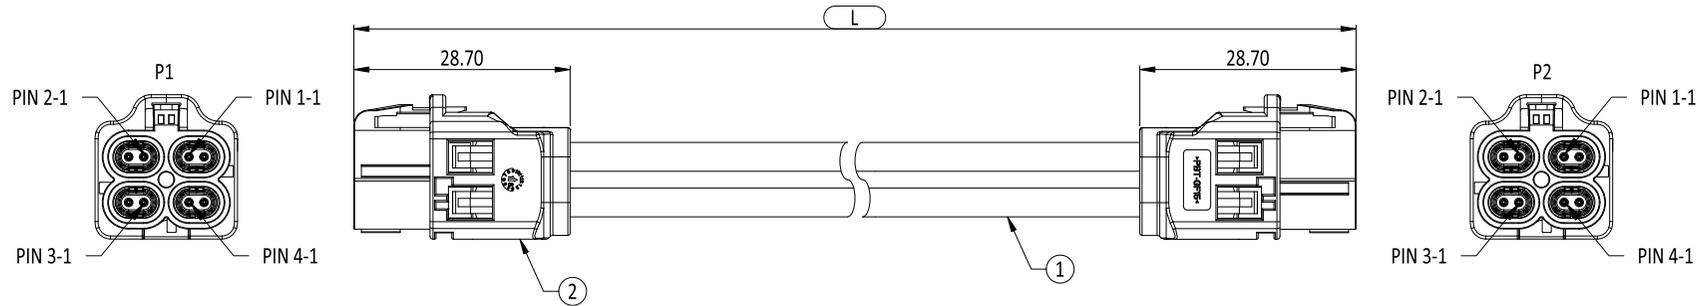

WIRING DIAGRAM	
P1	P2
PIN 1-1	PIN 1-1
PIN 1-2	PIN 1-2
PIN 2-1	PIN 2-1
PIN 2-2	PIN 2-2
PIN 3-1	PIN 3-1
PIN 3-2	PIN 3-2
PIN 4-1	PIN 4-1
PIN 4-2	PIN 4-2
SHIELD	SHIELD

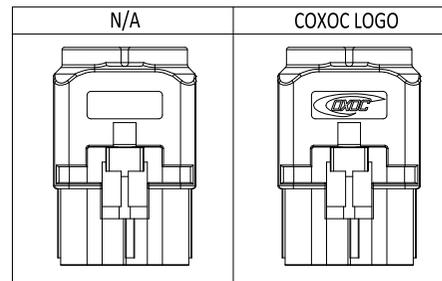

SPECIFICATION

ELECTRICAL CHARACTERISTIC:

- CHARACTERISTIC IMPEDANCE: 100 Ω
- FINISHED CABLE 100% CONDUCTIVITY TEST

ENVIRONMENTAL :

- OPERATING TEMPERATURE RANGE: -40°C TO +105°C

2	CAR ETHERNET 2x2 JACK	THERMOPLASTIC UL94V-0, 30u" AU	2
1	CABLE	G&G 2SPEED 251 CABLE	A/R
ITEM	PART	DESCRIPTION	Q'TY

2	1440303002Z	2000±50mm	Z/Z CODE	COXOC LOGO	
1	1440303001Z	3000±50mm	Z/Z CODE	COXOC LOGO	
ITEM	P/N	L (LENGTH)	CODING	LOGO	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE		SIP Crk Cpk			
ANG. ±5°		 CHANT SINCERE CO.,LTD			
0. ±0.50					
.0. ±0.30					
.00 ±0.20					
SCALE: 1:1		UNIT: mm		TITLE: CAR ETHERNET 2x2 JACK CABLE	
DRAWN: KEVIN_ZHENG		20 Oct 2025			
CHECKED: PEARL_HUNG		22 Oct 2025			
APPROVED: PEARL_HUNG		22 Oct 2025		PART NO. 1440303XXXX	
SIZE A4 SHEET 1/1		REV. C		CODE: GC CUSTOMER:	

	C	ECN-2510073(KEVIN)MODIFY PART NAME	20OCT2025
B6	B	ECN-2501016(JOAN)ADD P/N	03JAN2024
	A	ECN-2407033(QUEENIE)NEW DRAWN	16JUL2024
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6	7	8
9	10		