





RoHS
compliant




A-CODE(P1)



D-CODE(P1)

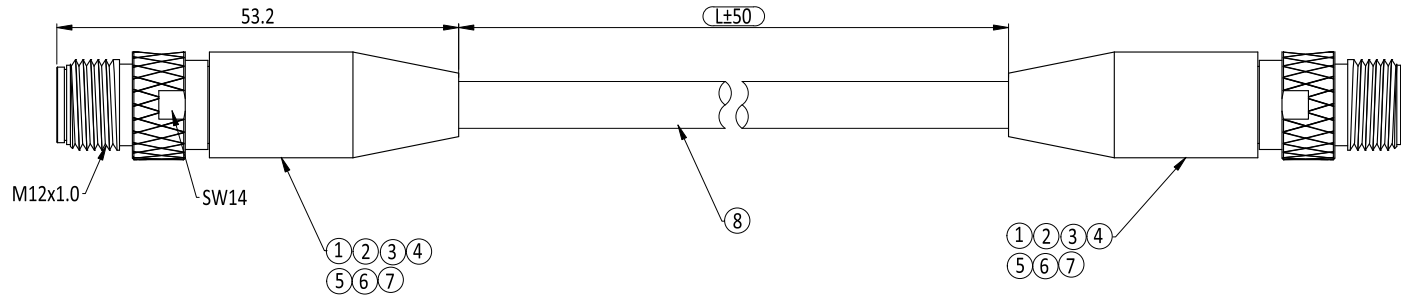

A-CODE(P2)



D-CODE(P2)

SPECIFICATION
ELECTRICAL CHARACTERISTIC:
1. CURRENT RATING(40°C): 4A
2. VOLTAGE RATING: 250V AC/DC

WATERPROOF : IP67

ENVIRONMENTAL :
1. OPERATING TEMPERATURE RANGE: -25°C TO +85°C

WIRING DIAGRAM(22AWG)

P1	P2
1	1 YELLOW
2	2 WHITE
3	3 ORANGE
4	4 BLUE
SHELL	SHELL

WIRING DIAGRAM(26AWG)

P1	P2
1	1 WHITE/ORANGE
3	3 ORANGE
2	2 WHITE/GREEN
4	4 GREEN
SHELL	SHELL





8	CABLE	SF/UTP CAT.5E 22AWG 4 CORES TWISTED TOGETHER WITH CENTER FILLER, LSZH, JACKET:TPU GREEN OD:6.4
7	EPOXY	NAEFUMIO 7391-38 A:B=3:1
6	RUBBER BOOT	SILICON RUBBER 70°
5	PLASTIC BODY	PA66(6401G6) GF30% , RATED UL94V-0
4	MALE MIDDLE HOLDER	BRASS(C3604-EH) 50u" NI MIN.
3	MALE FRONT METAL BODY	BRASS(C3604-EH) 50u" NI MIN.
2	CONTACT	BRASS(C3604-EH) OVER 50u" NI MIN. GOLD FLASH
1	CONNECTOR	M12 4PIN MALE CABLE END

ITEM	PART	DESCRIPTION
	C	ECN-2412026(KIRA)NEW P/N
	B	ECN-2408037(QUEENIE)NEW P/N
	A	ECN-17C066(RILEY)
ZONE	REVISION	DESCRIPTION

X=CODE(EX. A= A/A CODE)

3	1490203003X	CW0504XADB03E3M0	3000±50mm	26AWG	
2	1490203002X	CW0504XADB03E2M0	2000±50mm	26AWG	
1	1490203001X	CW0504XAA03E1M0	1000±50mm	22AWG	
ITEM	NEW P/N	OLD P/N	L (LENGTH)	CABLE	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE			SIP		
ANG. ±2°			Cmk		
0. ±0.50			Cpk		
0. ±0.30					
.00 ±0.20					
SCALE: 1:1			UNIT: mm		
DRAWN: KEVIN_ZHENG			26 Dec 2024		
CHECKED: PEARL_HUNG			26 Dec 2024		
APPROVED: PEARL_HUNG			26 Dec 2024		
TITLE:			M12 4PIN MALE CABLE		
PART NO.			1490203XXXX		
CODE: GC			CUSTOMER:		

1. 將CABLE 10PCS為1捆 2. 將10條線裝入一個防水袋內, 並放入兩包乾燥劑 3. 將5包防水袋, 共50條CABLE一起放入紙箱 4. 將50PCS/CARTON, 在封箱

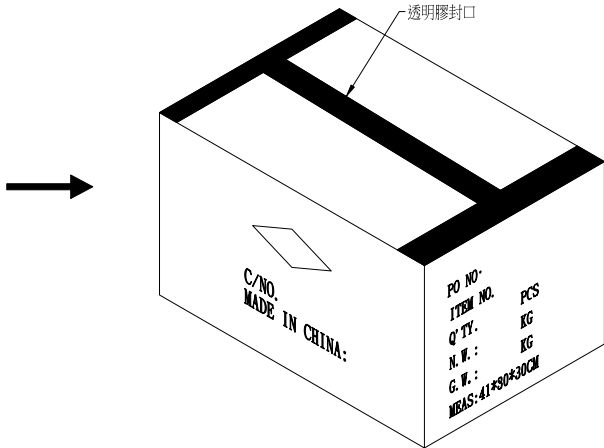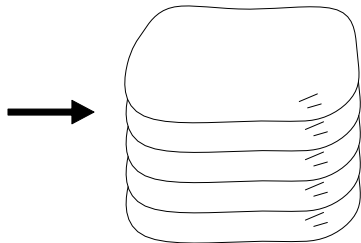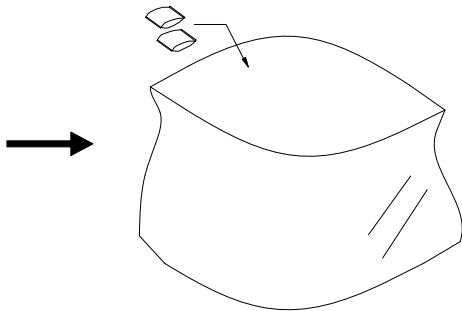

3	M9CE356279152500	棕色外箱(K=A)	356(L)*279(W)*152(H)	1
2	M9BE71163507009	WATERPROOF BAG	711(L)*635(W)*0.7(T)	5
1	M90000EZ0000029	干燥劑	透明	10
ITEM	PART	DESCRIPTION	SPECIFICATION	QTY

	C	ECN-2412026(KIRA)NEW P/N	09DEC2024
	B	ECN-2408037(QUEENIE)NEW P/N	16AUG2024
	A	ECN-17C066(RILEY)	25DEC2017
ZONE	REVISION	DESCRIPTION	DATE

UNLESS OTHERWISE SPECIFIED TOLERANCE		SIP
ANG.	±2°	ST
0.	±0.50	Cmk
.0	±0.30	Cpk
.00	±0.20	
SCALE:	AS SHOWN	UNIT: mm
DRAWN:	KEVIN_ZHENG	26 Dec 2024
CHECKED:	PEARL_HUNG	26 Dec 2024
APPROVED:	PEARL_HUNG	26 Dec 2024
SIZE	A4	SHEET 2/2
REV.	C	

CHANT SINCERE CO.,LTD	
TITLE: M12 D-CODE 4PIN MALE TO D-CODE CABLE	
PART NO.	1490203XXXX
CODE: GC	CUSTOMER: