


RoHS
compliant

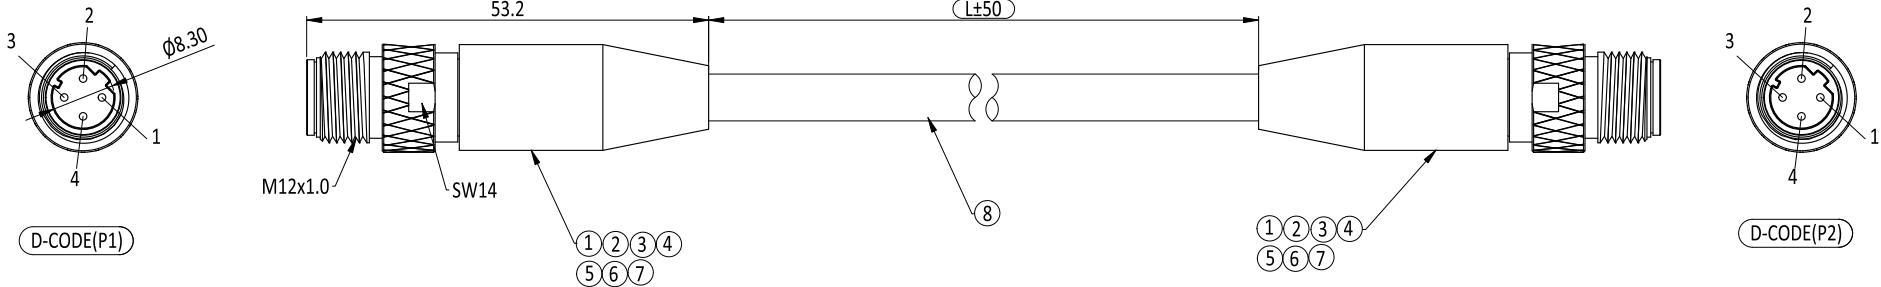


SPECIFICATION
ELECTRICAL CHARACTERISTIC:
1. CURRENT RATING(40°C): 4A
2. VOLTAGE RATING: 250V AC/DC


WATERPROOF : IP67

ENVIRONMENTAL :
1. OPERATING TEMPERATURE RANGE: -25°C TO +85°C

WIRING DIAGRAM(26AWG)

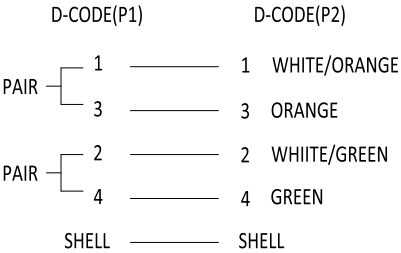

B	8	CABLE	S/FTP CAT.6A 26AWG 4 TWISTED PAIR , JACKET: TPU GREEN, OD6.2
	7	EPOXY	NAEFUMIO 7391-38 A:B=3:1
	6	RUBBER BOOT	SILICON RUBBER 70°
	5	PLASTIC BODY	PA66(6401G6) GF30% , RATED UL94V-0
	4	MALE MIDDLE HOLDER	BRASS(C3604-EH) 50u" NI MIN.
	3	MALE FRONT METAL BODY	BRASS(C3604-EH) 50u" NI MIN.
C	2	CONTACT	BRASS(C3604-EH) OVER 50u" NI MIN. GOLD FLASH
	1	CONNECTOR	M12 D-CODE 4PIN MALE CABLE END
	ITEM	PART	DESCRIPTION

2	1490203003D	CW0504DADB03E3M0	3000±50mm	
1	1490203002D	CW0504DADB03E2M0	2000±50mm	
ITEM	NEW P/N	OLD P/N	L (LENGTH)	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE		 SIP	 CHANT SINCERE CO.,LTD	
ANG. ±2°		 Cmk		
0. ±0.50		Cpk		
0. ±0.30				
.00 ±0.20				
SCALE: 1:1		UNIT: mm		
DRAWN: XINGRU_LAI		16 Aug 2024		TITLE:
CHECKED: PEARL_HUNG		19 Aug 2024		M12 D-CODE 4PIN MALE TO D-CODE CABLE
APPROVED: PEARL_HUNG		19 Aug 2024		PART NO. 1490203XXXX
	SIZE A4	SHEET 1/2	REV. B	CODE: GC
				CUSTOMER:

A		B	ECN-2408037(QUEENIE)NEW P/N	16AUG2024
		A	ECN-17C066(RILEY)	25DEC2017
	ZONE	REVISION	DESCRIPTION	DATE
	1	2	3	4



UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. $\pm 2^\circ$ 0. ± 0.50 .0 ± 0.30 .00 ± 0.20		 SIP  Cmk Cpk		 CHANT SINCERE CO.,LTD	
SCALE: AS SHOWN		UNIT: mm			
DRAWN: XINGRU_LAI		16 Aug 2024		TITLE: M12 D-CODE 4PIN MALE TO D-CODE CABLE	
CHECKED: PEARL_HUNG		19 Aug 2024			
APPROVED: PEARL_HUNG		19 Aug 2024		PART NO. 1490203XXXX	
	SIZE A4	SHEET 2/2	REV. B	CODE: GC	CUSTOMER:

	B	ECN-2408037(QUEENIE)NEW P/N	16AUG2024
	A	ECN-17C066(RILEY)	25DEC2017
ZONE	REVISION	DESCRIPTION	DATE