



RoHS
compliant

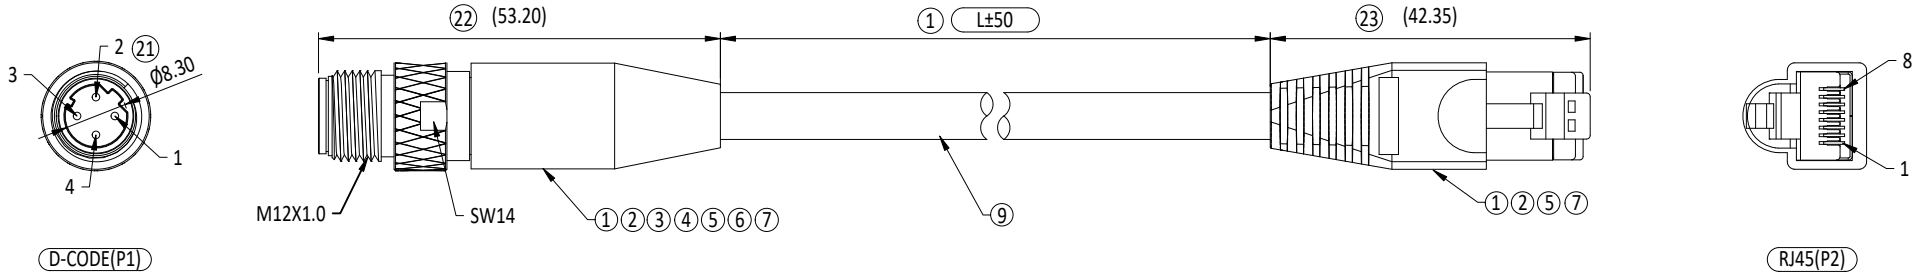

SPECIFICATION
ELECTRICAL CHARACTERISTIC:
1. CURRENT RATING(40°C): 4A
2. VOLTAGE RATING: 250V AC/DC

ENVIRONMENTAL :
1. TEMPERATURE RANGE: -25°C TO +85°C

WIRING DIAGRAM(26AWG)

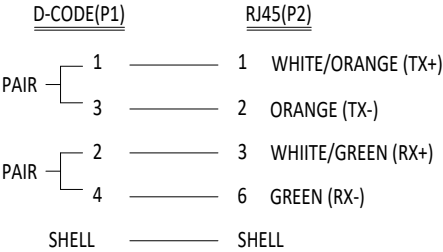


9	CABLE	S/FTP CAT.6A 26AWG 4 TWISTED PAIR , JACKET: TPU GREEN, OD: 6.2
8	EPOXY	NAEFUMIO 7391-38 A:B=3:1
7	RUBBER BOOT	M12 CONN.: SILICON RUBBER 70° RJ45: PVC
6	CRIMP O-RING	SILICON RUBBER 60°
5	PLASTIC BODY	M12 CONN.: PA66(6401G6) GF30% , RATED UL94V-0 RJ45: POLYCARBONATE, RATED UL 94V-0
4	MALE MIDDLE HOLDER	BRASS(C3604-EH) 50u" NI MIN.
3	MALE FRONT METAL BODY	BRASS(C3604-EH) 50u" NI MIN.
2	CONTACT	M12 CONN.: BRASS(C3604-EH) OVER 50u" NI MIN. GOLD FLASH RJ45: PHOSPHOR BRONZE(C5191), AU 50u"
1	CONNECTOR	M12 D-CODE 4PIN MALE CABLE END RJ45 8P8C CONNECTOR

ITEM	PART	DESCRIPTION
------	------	-------------

	C	ECN-2408032(QUEENIE)ADD NEW P/N FOR 2M0 & 3M0	09AUG2024
	B	ECN-2401062(JOLIN)NEW P/N	17JAN2024
	A	ECN-17C065(RILEY)	17MAY2012

ZONE	REVISION	DESCRIPTION	DATE
------	----------	-------------	------

3	1490603003D	N/A	3000±50mm	D	
2	1490603002D	N/A	2000±50mm	D	
1	1490603001D	CW0648DADB03E1M0	1000±50mm	D	
ITEM	NEW P/N	OLD P/N	L (LENGTH)	CODE	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE		 SIP		 CHANT SINCERE CO.,LTD	
ANG. ±5°		 Cmk			
0. ±0.50		Cpk			
.0 ±0.30					
.00 ±0.20					
SCALE: AS SHOWN		UNIT: mm		TITLE: PDR- M12 D-CODE 4PIN MALE TO RJ45 CABLE (26AWG)	
DRAWN: HOLLY_TU		09 Aug 2024			
CHECKED: PEARL_HUNG		12 Aug 2024			
APPROVED: PEARL_HUNG		12 Aug 2024			
		SIZE A4	SHEET 1/1	REV. C	PART NO. 1490603XXXX
7		8		9	
				10	
				CUSTOMER:	