


RoHS
compliant

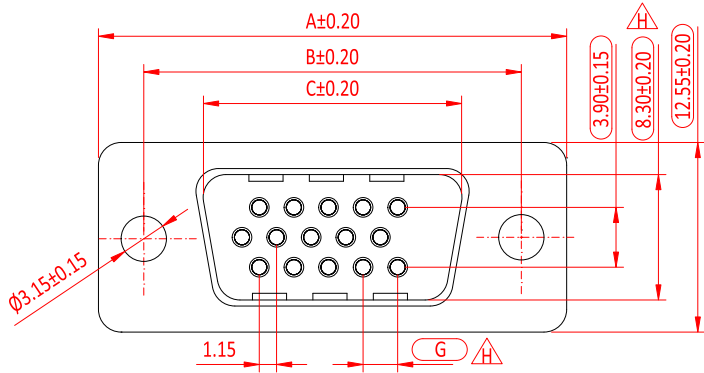

POS.	A	B	C	D	E	F	G
15	30.80	24.99	16.92	19.00	15.60	10.60	2.29
26	39.20	33.32	25.38	27.70	24.60	10.60	2.29
44	53.05	47.04	38.84	41.10	38.10	10.60	2.29
62	69.50	63.50	55.43	57.30	54.30	10.80	2.41

SPECIFICATION

MATERIAL AND FINISH:

1. INSULATION: PBT+30%GLASS FIBER.UL 94V-0, BLACK
2. CONTACT: PHOSPHOR BRONZE
3. SHELL: STEEL





ELECTRICAL CHARACTERISTIC:

1. CURRENT RATING: 3 A AC/DC MAX.
2. CONTACT RESISTANCE: 30 mΩ MAX.
3. INSULATION RESESTANCE: 1000 MΩ MIN.
4. WITHSTANDING VOLTAGE: AC 1000 V

ENVIRONMENT:

1. OPERATION TEMPERATURE: -55°C~+105°C

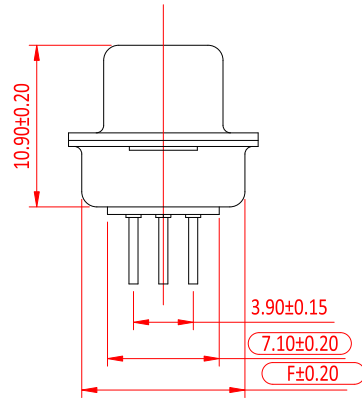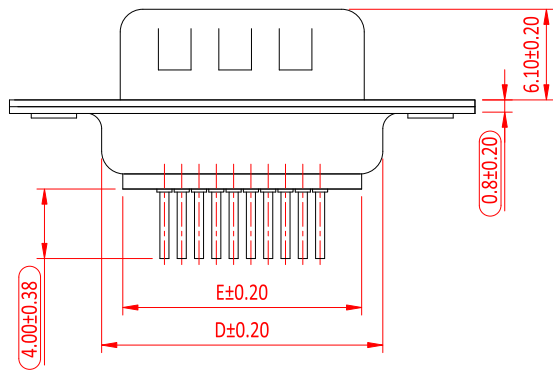

5	50101010050	102AE26MGQAAA3	26	GOLD FLASH	
4	50101010040	102AE62MSQAAA3	62	GOLD FLASH/SN	
3	50101010030	102AE44MSQAAA3	44	GOLD FLASH/SN	
2	50101010020	102AE26MSQAAA3	26	GOLD FLASH/SN	
1	50101010010	102AE15MSQAAA3	15	GOLD FLASH/SN	
ITEM	NEW P/N	OLD P/N	PIN	CONTACT AREA PLATING	NOTE

UNLESS OTHERWISE
SPECIFIED TOLERANCE
X. ±0.30 X° ±3°
.XX ±0.25 X° ±2°
.XXX ±0.20 XXX° ±1°
.XXX ±0.15 XXX° ±0.5°



CHANT SINCERE CO., LTD.

SCALE: AS SHOWN	UNIT: mm	TITLE: PDR- HDB15-62公插板式			
DRAWN: KEVIN_ZHENG	04 Jun 2024				
CHECKED: PEARL_HUNG	04 Jun 2024				
APPROVED: PEARL_HUNG	04 Jun 2024	PART NO. 5010101XXXX			
SIZE A4	SHEET 1/1	REV. H	CODE: H03	CUSTOMER:	

E3, F7, G4	H	ECN-2405071(QUEENIE)ADD NEW SIZE	23MAY2024
	G	ECN-2307037(QUEENIE)CHANGE OUTLINE	13JUL2023
	F	ECN-0912234(Jile)	12/30/09
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6		