

SPECIFICATION

MATERIAL AND FINISH:


1. INSULATION: PBT+30% GLASS FIBER, UL 94V-0, BLACK
2. CONTACT: PHOSPHOR BRONZE
3. SHELL: STEEL

ELECTRICAL CHARACTERISTIC:




1. CURRENT RATING(MAX.): 3A AC/DC
2. CONTACT RESISTANCE(MAX.): 30 mΩ
3. INSULATION RESESTANCE(MIN.): 1000 MΩ
4. WITHSTANDING VOLTAGE: 1000 VAC

ENVIRONMENT:


1. OPERATING TEMPERATURE RANGE: -55°C TO +105°C

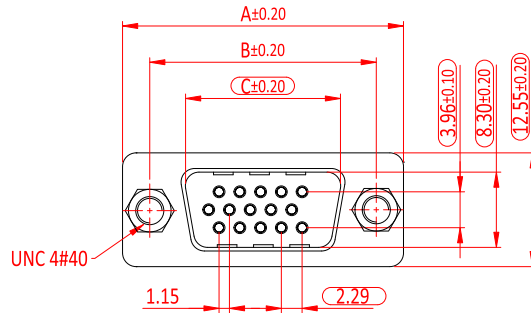

PIN	A	B	C	D	E
15	30.99	24.99	17.92	19.00	15.60
26	39.20	33.32	26.38	27.70	24.90
44	53.05	47.04	39.94	41.10	38.20
62	70.50	62.5	56.43	54.80	54.30

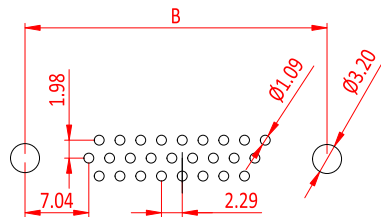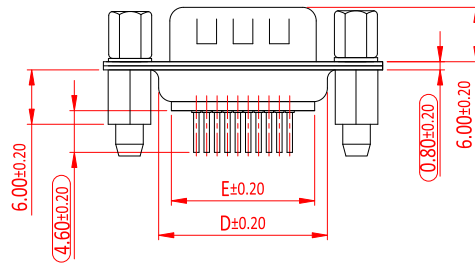

PARTS DIMENSION TABLE



PARTS NO.	DIM. a	DIM. b	INNER THREAD
G	5.0	9.5	4#40

4	50101030040	102AE62MGPIGA3	62	GOLD FLASH	SN	FIXED 5.0x9.5
3	50101030030	102AE44MGPIGA3	44	GOLD FLASH	SN	FIXED 5.0x9.5
2	50101030020	102AE26MGPIGA3	26	GOLD FLASH	SN	FIXED 5.0x9.5
1	50101030010	102AE15MGPIGA3	15	GOLD FLASH	SN	FIXED 5.0x9.5
ITEM	NEW P/N	OLD P/N	PIN	CONTACT	SHELL	SCREWS
UNLESS OTHERWISE SPECIFIED TOLERANCE X° ±0.38° X° ±3° .X° ±0.30° .X° ±2° .XX° ±0.25° .XX° ±1° .XXX° ±0.15° .XXX° ±0.5°			 SIP  Cmk Cpk		 CHANT SINCERE CO., LTD.	
SCALE: AS SHOWN			UNIT: mm			
DRAWN: XINGRU_LAI			17 Jun 2024		TITLE: HDB15-62公反鱼叉铆螺丝插板式	
CHECKED: PEARL_HUNG			18 Jun 2024			
APPROVED: PEARL_HUNG			18 Jun 2024		PART NO. 5010103XXXX	
			SIZE A4	SHEET 1/1	REV. A	CODE: H03
7			8		9	
					10	
					CUSTOMER:	

	A	ECN-2405068(JOLIN)NEW P/N	31MAY2024
	X1	ECR-20C098(CHICHI)	24DEC2020
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6	7	8
9	10		