





SPECIFICATION
MATERIAL AND FINISH:
1. INSULATION: PBT+30% GLASS FIBER, UL 94V-0, BLACK
2. CONTACT: PHOSPHOR BRONZE
3. SHELL: STEEL


ELECTRICAL CHARACTERISTIC:
1. CURRENT RATING(MAX.): 3A AC/DC
2. CONTACT RESISTANCE(MAX.): 30 mΩ
3. INSULATION RESESTANCE(MIN.): 1000 MΩ
4. WITHSTANDING VOLTAGE: 1000 VAC

ENVIRONMENT:
1. OPERATING TEMPERATURE RANGE: -55°C TO +105°C

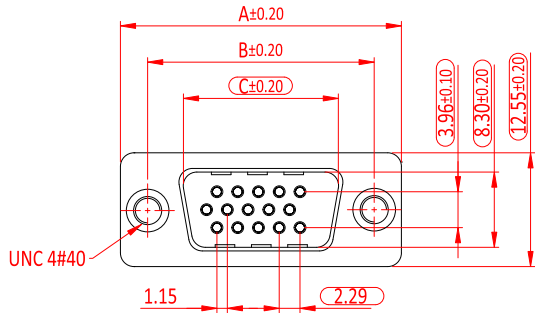

POS.	A	B	C	D	E
15	30.99	24.99	17.92	19.00	15.60
26	39.20	33.32	26.38	27.70	24.90
44	53.05	47.04	39.94	41.10	38.20
62	70.50	62.5	56.43	54.80	54.30

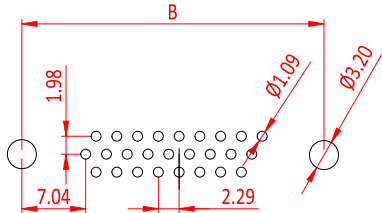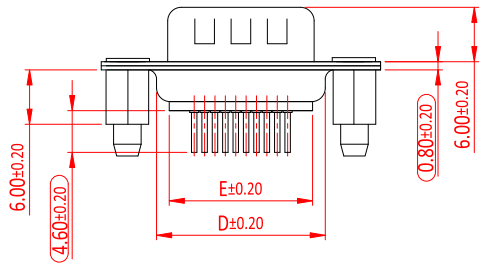

4	50101040040	102AE62MGPIEA3	62	GOLD FLASH	SN	
3	50101040030	102AE44MGPIEA3	44	GOLD FLASH	SN	
2	50101040020	102AE26MGPIEA3	26	GOLD FLASH	SN	
1	50101040010	102AE15MGPIEA3	15	GOLD FLASH	SN	
ITEM	NEW P/N	OLD P/N	PIN	CONTACT	SHELL	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE X ±0.38 X° ±3° .X ±0.30 .X° ±2° .XX ±0.25 .XX° ±1° .XXX ±0.15 .XXX° ±0.5°		 SIP  Cmk Cpk		 CHANT SINCERE CO., LTD.		
SCALE: AS SHOWN		UNIT: mm				
DRAWN: XINGRU_LAI		31 May 2024		TITLE: HDB15-62公反鱼叉铆螺丝插板式		
CHECKED: PEARL_HUNG		31 May 2024				
APPROVED: PEARL_HUNG		31 May 2024		PART NO. 5010104XXXX		
	SIZE A4	SHEET 1/1	REV. A	CODE: H03		CUSTOMER:
7		8		9		10

	A	ECN-2405064(JOLIN)NEW P/N	22MAY2024
	X1	ECR-20C098(CHICHI)	24DEC2020
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6	7	8
9	10	11	12