


RoHS
compliant





PIN	A	B	C	D	E	F	G
15	30.80	24.99	16.34	19.00	15.60	10.60	2.29
26	39.20	33.32	24.76	27.70	24.60	10.60	2.29
44	53.05	47.04	38.33	41.10	38.10	10.60	2.29
62	69.50	63.50	54.89	57.30	54.30	10.80	2.41

SPECIFICATION
MATERIAL AND FINISH:
1. INSULATION: PBT+30%GLASS FIBER.UL 94V-0, BLACK
2. CONTACT: PHOSPHOR BRONZE
3. SHELL: STEEL, NI OR SN PLATED

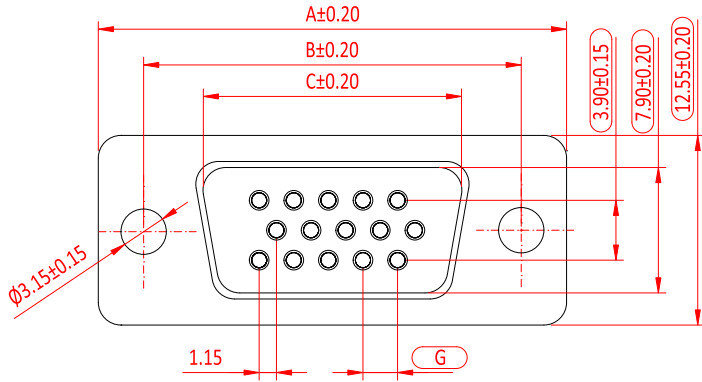

ELECTRICAL CHARACTERISTIC:
1. CURRENT RATING: 3 A AC/DC MAX.
2. CONTACT RESISTANCE: 30 mΩ MAX.
3. INSULATION RESESTANCE: 1000 MΩ MIN.
4. WITHSTANDING VOLTAGE: 1000 V AC

ENVIRONMENT:
1. OPERATION TEMPERATURE: -55°C~+105°C

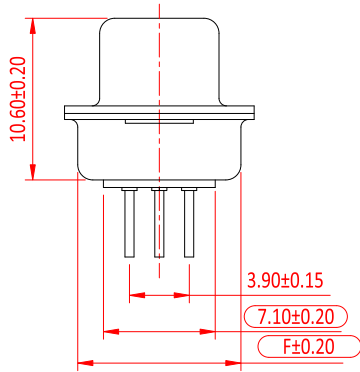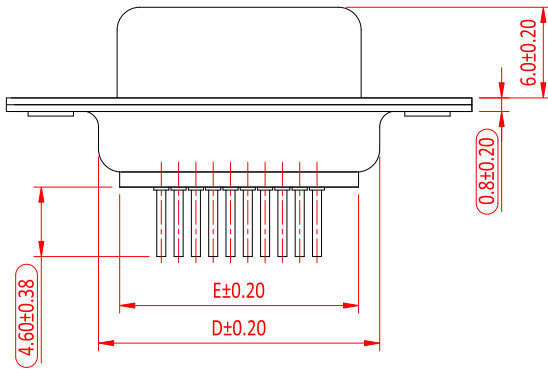

4	50102010040	102AE62FSNAAA3	62	GOLD FLASH/SN	NI		
3	50102010030	102AE44FSNAAA3	44	GOLD FLASH/SN	NI		
2	50102010020	102AE26FSNAAA3	26	GOLD FLASH/SN	NI		
1	50102010010	102AE15FSNAAA3	15	GOLD FLASH/SN	NI		
ITEM	NEW P/N	OLD P/N	PIN	CONTACT	SHELL	NOTE	
UNLESS OTHERWISE SPECIFIED TOLERANCE			SIP ST Cmk Cpk CHANT SINCERE CO., LTD				
X	±0.30	X°					±3°
XX	±0.25	XX°					±2°
XXX	±0.20	XXX°					±1°
XXX	±0.15	XXX°					±0.5°
SCALE: AS SHOWN		UNIT: mm		TITLE: HIGH DENSITY D-SUB PCB 180° DIP FEMALE			
DRAWN: KEVIN_ZHENG		03 Jul 2024					
CHECKED: PEARL_HUNG		03 Jul 2024					
APPROVED: PEARL_HUNG		03 Jul 2024		PART NO. 5010201XXXX			
	SIZE A4	SHEET 1/1	REV. H	CODE: H03		CUSTOMER:	
7		8		9		10	

	H	ECN-2405086(QUEENIE)CHANGE OUTLINE	14JUN2024
	G	ECN-1101109(CHICHI)	25JAN2011
	F	ECN-0912155(JILE)	12/17/09
ZONE	REVISION	DESCRIPTION	DATE