

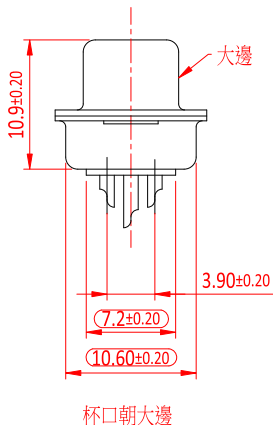
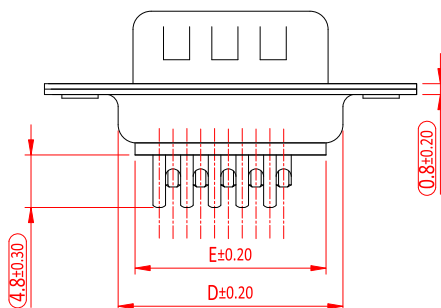


RoHS
compliant



POS.	A	B	C	D	E	F
15	30.99	24.99	16.89	19.00	15.60	2.29
26	39.20	33.32	25.29	27.70	24.90	2.29
44	53.05	47.04	38.84	41.10	38.20	2.29
62	70.50	62.5	55.4	54.80	54.30	2.41

SPECIFICATION

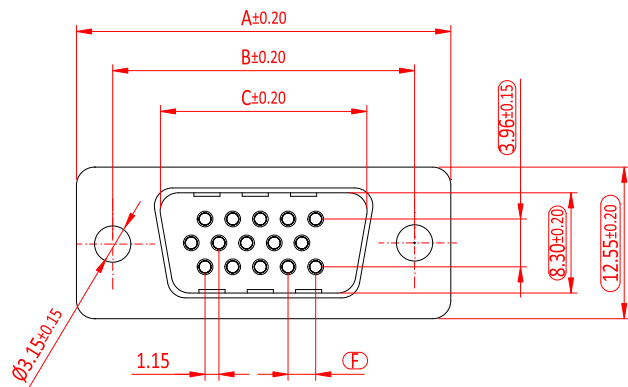

MATERIAL AND FINISH:

1. INSULATOR: THERMAL PLASTIC UL94V-0, BLACK

2. CONTACTS: COPPER ALLOY

PLATING: UNDERPLATE: 50~100u" NI

CONTACT AREA: 1~30u" AU

SOLDER TAILS AREA: 100~200u" SN

3. SHELL: STEEL

4. RIVET, BOARDLOCK: COPPER ALLOY

ELECTRICAL CHARACTERISTIC:

1. OPERATION VOLTAGE: 250 VAC MAX.

2. CURRENT RATING: 3 A MAX.

3. CONTACT RESISTANCE: 15 mΩ MAX. @ 500 VDC

4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC / MINUTE


ENVIRONMENT:

1. OPERATING TEMPERATURE RANGE: -55°C TO +105°C



8	50103020080	101AE62MGQAAA3	62	GOLD FLASH	NI	杯口朝大邊
7	50103020070	101AE44MGQAAA3	44	GOLD FLASH	NI	杯口朝大邊
6	50103020060	101AE26MGQAAA3	26	GOLD FLASH	NI	杯口朝大邊
5	50103020050	101AE15MGQAAA3	15	GOLD FLASH	NI	杯口朝大邊
4	50103020040	101AE62MGPAAA3	62	GOLD FLASH	SN	杯口朝大邊
3	50103020030	101AE44MGPAAA3	44	GOLD FLASH	SN	杯口朝大邊
2	50103020020	101AE26MGPAAA3	26	GOLD FLASH	SN	杯口朝大邊
1	50103020010	101AE15MGPAAA3	15	GOLD FLASH	SN	杯口朝大邊
ITEM	NEW P/N	OLD P/N	PIN	CONTACT	SHELL	NOTE

UNLESS OTHERWISE
SPECIFIED TOLERANCE
X. ±0.35 X.° ±3°
.X ±0.30 .X.° ±2°
XX ±0.25 XX.° ±1°
XXX ±0.15 XXX.° ±0.5°



CHANT SINCERE CO., LTD.

SCALE: AS SHOWN	UNIT: mm	TITLE: HDB15-62公焊線式
DRAWN: XINGRU_LAI	30 May 2024	
CHECKED: PEARL_HUNG	30 May 2024	
APPROVED: PEARL_HUNG	30 May 2024	PART NO. 5010302XXXX
	SIZE A4 SHEET 1/1	REV. C
CODE: H03		CUSTOMER:

	C	ECN-2405009(JOLIN)NEW P/N	07MAY2024
(7,G)	B	ECN-2207061(QUEENIE)MODIFY SPEC	25JUL2022
	A	ECN-2207026(QUEENIE)	12JUL2022
ZONE	REVISION	DESCRIPTION	DATE