
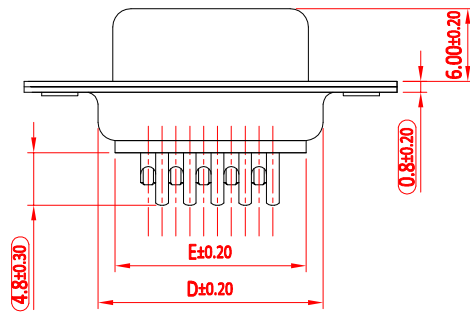



POS.	A	B	C	D	E	F
15	30.99	24.99	16.34	19.00	15.60	2.29
26	39.20	33.32	24.76	27.70	24.65	2.29
44	53.05	47.04	38.33	41.10	38.20	2.29
62	69.5	63.5	54.89	57.3	54.30	2.41

SPECIFICATION

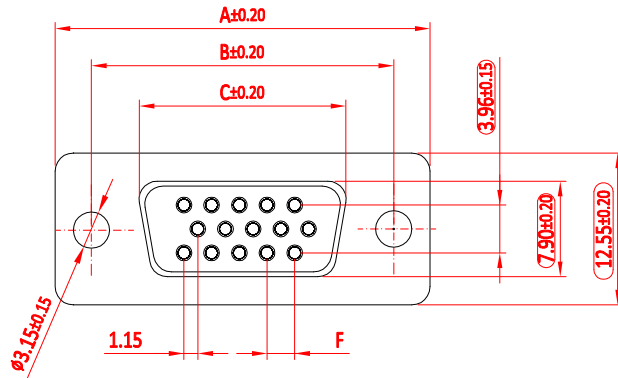

MATERIAL AND FINISH:

- INSULATOR: THERMAL PLASTIC UL94V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: UNDERPLATE: 50~100u" NI
CONTACT AREA: 1~30u" AU
SOLDER TAILS AREA: 100~200u" SN
- SHELL: STEEL
- RIVET, BOARDLOCK: COPPER ALLOY

ELECTRICAL CHARACTERISTIC:

- OPERATION VOLTAGE: 250 VAC MAX.
- CURRENT RATING: 3 A MAX.
- CONTACT RESISTANCE: 15 mΩ MAX. @ 500 VDC
- DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC / MINUTE

ENVIRONMENT:

- OPERATING TEMPERATURE RANGE: -55°C TO +105°C

8	50104020080	101AE62FGNAAA3	62	GOLD FLASH	NI	杯口朝大邊
7	50104020070	101AE44FGNAAA3	44	GOLD FLASH	NI	杯口朝大邊
6	50104020060	101AE26FGNAAA3	26	GOLD FLASH	NI	杯口朝大邊
5	50104020050	101AE15FGNAAA3	15	GOLD FLASH	NI	杯口朝大邊
4	50104020040	101AE62FGTAAA3	62	GOLD FLASH	SN	杯口朝大邊
3	50104020030	101AE44FGTAAA3	44	GOLD FLASH	SN	杯口朝大邊
2-1	5010402002A	101AE26FGTAAAC	26	GOLD FLASH	SN	杯口朝大邊, W/ PRINTING
2	50104020020	101AE26FGTAAA3	26	GOLD FLASH	SN	杯口朝大邊
1	50104020010	101AE15FGTAAA3	15	GOLD FLASH	SN	杯口朝大邊
ITEM	NEW P/N	OLD P/N	PIN	CONTACT	SHELL	NOTE



UNLESS OTHERWISE
SPECIFIED TOLERANCE
X. ±0.35 X. ±3°
.X ±0.30 .X° ±2°
XX ±0.25 XX° ±1°
XXX ±0.15 XXX° ±0.5°



CHANT SINCERE CO., LTD.

SCALE: AS SHOWN UNIT: mm

DRAWN: HOLLY_TU 16 Jul 2024

CHECKED: PEARL_HUNG 17 Jul 2024


APPROVED: PEARL_HUNG 17 Jul 2024

REV. D

TITLE: HDB15-62母焊線式

PART NO. 5010402XXXX

CODE: H03 CUSTOMER:



SIZE A4 SHEET 1/1

A

A