

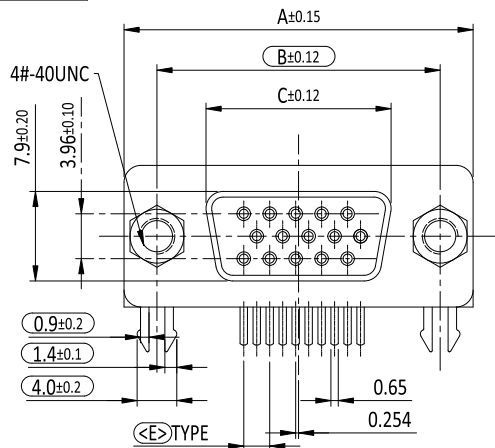
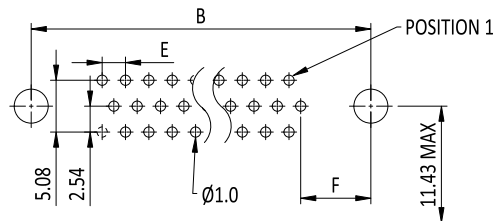





POS.	A	B	C	E	F
15	30.80	24.99	16.34	2.29	6.95 ± 0.15
26	39.2	33.32	24.66	2.29	6.75 ± 0.15
44	53.10	47.04	38.38	2.29	6.75 ± 0.15
62	69.5	63.50	54.85	2.41	7.05 ± 0.15

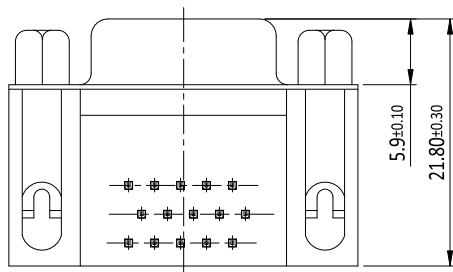

EDGE OF PCB
RECOMMENDED PCB LAYOUT(TOP VIEW)
TOLERANCES: ± 0.05 mm

PARTS DIMENSION TABLE



DIM.	DIM.	INNER
a	b	THREAD
4.8	11.8	4#40

SPECIFICATION

MATERIAL AND FINISH:

- INSULATOR: PBT+30% GLASS FIBER(UL94V-0), BLACK
- CONTACT: BRASS
PLATING: UNDERPLATE: 40u" MIN. NI
CONTACT AREA: 1~30u" AU
SOLDER TAILS AREA: 80u" MIN. SN OR GOLD FLASH
- SHELL: STEEL, 40u" NI or 40u" SN OVER 40u" CU

ELECTRICAL CHARACTERISTIC:

- CURRENT RATE: 3 A
- INSULATOR RESISTANCE: 1000 M Ω MIN @ 500 VDC
- DIELECTRIC STRENGTH: 1000 VAC / MINUTE

ENVIRONMENT:

- OPERATING TEMPERATURE RANGE: -55°C TO +105°C



2						
1	50106050010	103AE15FGTAAC3	15	GOLD FLASH	SN	FIXED 4.8x11.8mm
ITEM	NEW P/N	OLD P/N	PIN	CONTACT	SHELL	SCREWS
UNLESS OTHERWISE SPECIFIED TOLERANCE		 SIP		 CHANT SINCERE CO.,LTD		
ANG. $\pm 5^{\circ}$		 Cmk				
0 ± 0.50		Cpk				
.0 ± 0.30						
.00 ± 0.20						
SCALE: AS SHOWN		UNIT: mm		TITLE: D-SUB PCB RIGHT ANGLE RIGHT ANGLE FEMALE		
DRAWN: XINGRU_LAI		16 Jul 2024				
CHECKED: PEARL_HUNG		16 Jul 2024				
APPROVED: PEARL_HUNG		16 Jul 2024		PART NO. 50106050010		
		SIZE A4	SHEET 1/1	REV. I	CODE: GC	
7		8		9		10
				CUSTOMER:		

I	ECN-2405005(JOLIN)CHANGE OUTLINE	03MAY2024
H	ECN-1106040(MIMI)	02JUL2021
G	ECN-0607111(MINGL)	12JUL2006
ZONE	REVISION	DESCRIPTION
1	2	3
4	5	6