






SPECIFICATION
MATERIAL AND FINISH:
1. INSULATOR: THERMAL PLASTIC UL94V-0, BLACK
2. CONTACTS: COPPER ALLOY
PLATING: IGNORE
3. SHELL: STEEL
PLATING: 80~100u" SN OR NI
MIN BASE COPPER: 40u" MIN.

ELECTRICAL CHARACTERISTIC:
1. CURRENT RATING: 3 A MAX.
2. CONTACT RESISTANCE: IGNORE
3. INSULATION RESISTANCE: 3000 MΩ MIN. @ 500 V DC
4. DIELECTRIC WITHSTANDING VOLTAGE: IGNORE

ENVIRONMENT:
1. OPERATING TEMPERATURE: -55°C TO +105°C

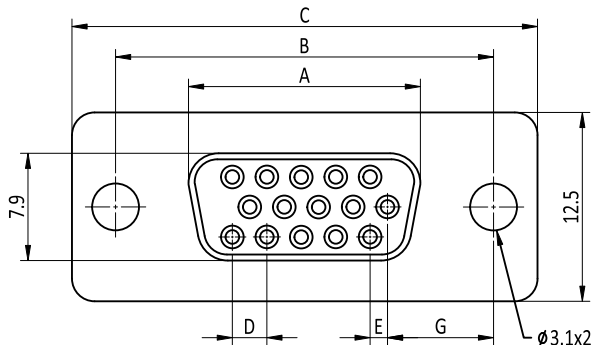


PIN	A	B	C	D	E	F	G
15	16.30	25.00	30.8	2.29	1.14	19.2	7.04
26	24.60	33.30	39.2	2.29	1.14	27.7	6.88
44	38.30	47.10	53.1	2.29	1.14	41.1	6.88
62	54.80	63.50	69.4	2.41	1.20	57.3	7.00

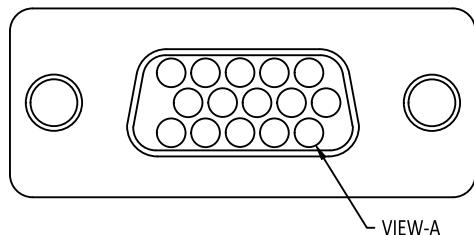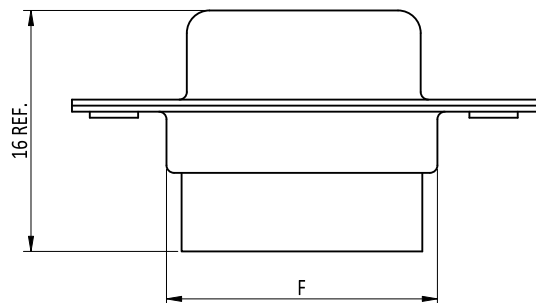

4	50108010040	104AE62B0NAA13	62	NI	
3	50108010030	104AE44B0NAA13	44	NI	
2	50108010020	104AE26B0NAA13	26	NI	
1	50108010010	104AE15B0NAA13	15	NI	
ITEM	NEW P/N	OLD P/N	PIN	SHELL	NOTE

UNLESS OTHERWISE SPECIFIED TOLERANCE	SIP	 CHANT SINCERE CO.,LTD
ANG. ±2° 0. ±0.50 .0 ±0.30 .00 ±0.20	ST Cmk Cpk	
SCALE: AS SHOWN	UNIT: mm	

DRAWN: HOLLY_TU	11 Nov 2024	TITLE: D-SUB CRIMP HOUSING	
CHECKED: PEARL_HUNG	11 Nov 2024	PART NO.	5010801XXXX
APPROVED: PEARL_HUNG	11 Nov 2024	CODE: H	CUSTOMER:
 SIZE A4	SHEET 1/1	REV. J	

B7, C7	J	ECN-2411037(QUEENIE)ADD NEW P/N	11NOV2024
	I	ECN-2109045(NINA)UPDATE TOLERANCE	08OCT2021
	H	ECN-197047(POLLY)CHANGE TOLERANCE	18JUL2019
ZONE	REVISION	DESCRIPTION	DATE