


RoHS
compliant

SPECIFICATION
MATERIAL AND FINISH:
1. INSULATION: PBT+30%GLASS FIBER.UL 94V-0, BLACK
2. CONTACT: PHOSPHOR BRONZE
3. SHELL: STEEL






ELECTRICAL CHARACTERISTIC:
1. CURRENT RATING: 3A AC/DC MAX.
2. CONTACT RESISTANCE: 30 mΩ MAX.
3. INSULATION RESESTANCE: 1000 MΩ MIN.
4. WITHSTANDING VOLTAGE: 1000VAC

ENVIRONMENT:
1. OPERATING TEMPERATURE RANGE: -55°C TO +105°C

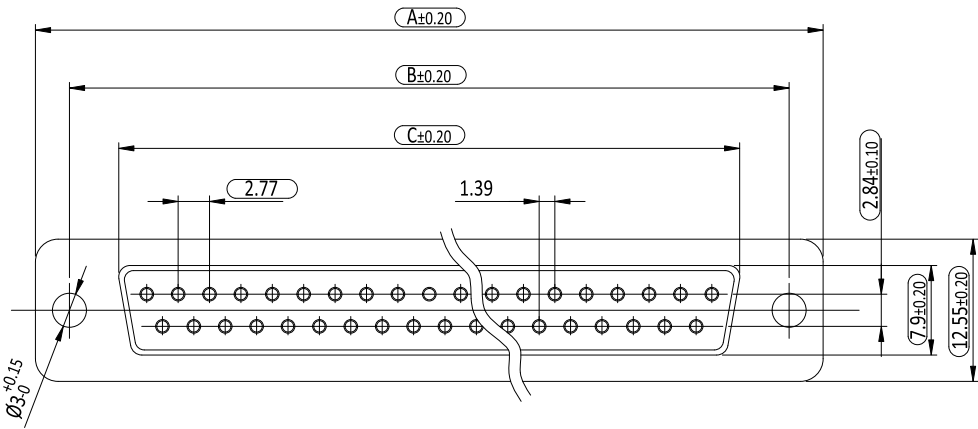

PIN.	A	B	C	D	E
9	30.80	25.00	16.60	19.10	15.60
15	39.14	33.28	24.90	27.63	24.60
25	53.08	47.02	38.33	41.00	37.95
37	69.44	63.50	53.12	57.25	54.45

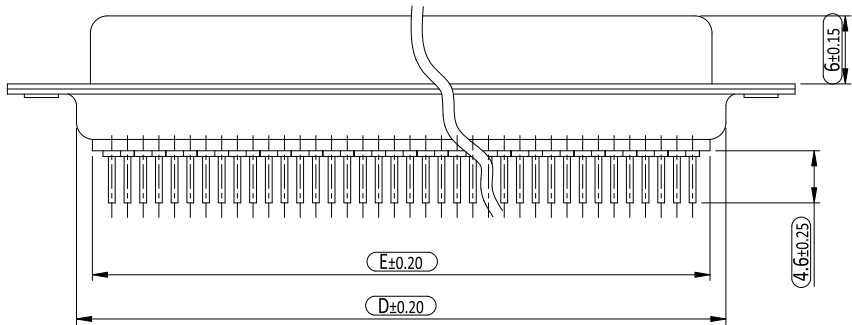

4	50203040040	202AE37FGTAAA3	37	GOLD FLASH	SN	W/O SCREWS
3	50203040030	202AE25FGTAAA3	25	GOLD FLASH	SN	W/O SCREWS
2	50203040020	202AE15FGTAAA3	15	GOLD FLASH	SN	W/O SCREWS
1	50203040010	202AE09FGTAAA3	9	GOLD FLASH	SN	W/O SCREWS
ITEM	NEW P/N	OLD P/N	PIN	CONTACT	SHELL	SCREWS
UNLESS OTHERWISE SPECIFIED TOLERANCE X.° ±0.30 X.° ±3° .X.° ±0.25 .X.° ±2° .XX.° ±0.20 .XX.° ±1° .XXX° ±0.15 .XXX° ±0.5°  SIP  Cmk Cpk			 CHANT SINCERE CO.,LTD			
SCALE: AS SHOWN		UNIT: mm		TITLE: DB 9-37P母插板式		
DRAWN: XINGRU_LAI		17 Jul 2024				
CHECKED: PEARL_HUNG		26 Jul 2024				
APPROVED: PEARL_HUNG		26 Jul 2024		PART NO. 5020304XXXX		
	SIZE A4	SHEET 1/1	REV. C	CODE: H03		CUSTOMER:
7		8		9		10

	C	ECN-2405015(JOLIN)NEW P/N	08MAY2024
	B	ECN-2204037(CHICHI)CHANGE OUTLINE	19APR2022
	A	ECN-191042(CHICHI)	21JAN2019
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6	7	8
9	10		