
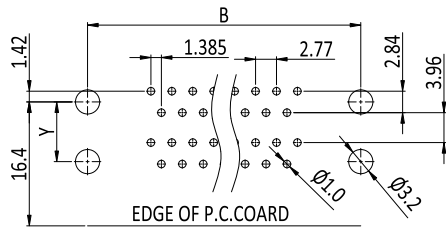
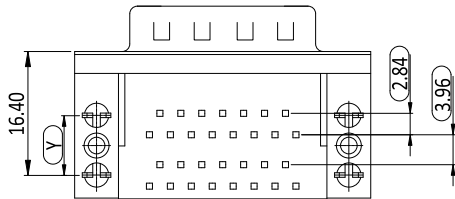
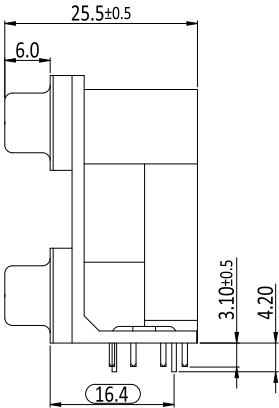


SPECIFICATION
MATERIAL AND FINISH:
1. INSULATOR: THERMAIL PLASTIC UL94V-0, BLACK
2. CONTACTS: COPPER ALLOY
 PLATING: UNDERPLATE: 50~100u" NI
 CONTACT AREA: 1~30u" SELECTIVE AU
 SOLDER TAILS AREA: 100~200u" SN
3. SHELL: STEEL
4. RIVET, BOARD LOCK: COPPER ALLOY

ELECTRICAL CHARACTERISTIC:
1. OPERATION VOLTAGE: 250 VAC MAX.
2. CURRENT RATING: 3 A MAX.
3. CONTACT RESISTANCE: 25 mΩ MAX.
4. INSULATION RESISTANCE: 3000 MΩ MIN. @ 500V DC
5. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC / MINUTE

ENVIRONMENT:
1. OPERATING TEMPERATURE RANGE: -55°C TO +105°C

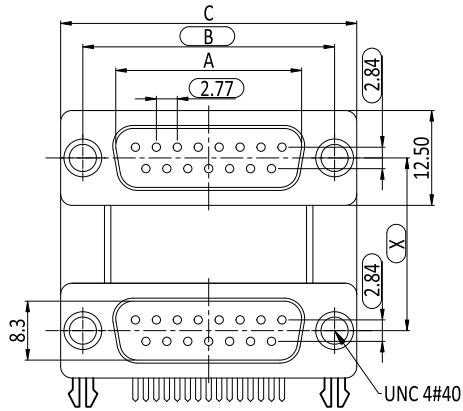

RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCES: ±0.05mm

PIN	A	B	C
9	16.92	25.00	30.8
15	25.25	33.30	39.2
25	38.96	47.10	53.1
37	55.42	63.50	69.4

2							
1	50211020010	213AE09AGAAAA3	09	GOLD FLASH	SN	15.875mm	6.90mm
ITEM	NEW P/N	OLD P/N	PIN	CONTACT	SHELL	DIM. "X"	DIM. "Y"
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±5° 0. ±0.5 0. ±0.3 .00 ±0.2				SIP ST Cmk Cpk	 CHANT SINCERE CO., LTD		
SCALE: AS SHOWN				UNIT: mm			
DRAWN: XINGRU_LAI				08 Aug 2024	TITLE: D-SUB DUAL PORT		
CHECKED: PEARL_HUNG				21 Aug 2024			
APPROVED: PEARL_HUNG				21 Aug 2024	PART NO. 50211020010		
				SIZE A4 SHEET 1/1 REV. 0	CODE: GA CUSTOMER:		

	O	ECN-2406091(POLLY)NEW P/N	19JUL2024
	N	ECN-1001151(GARY)	26JAN2010
	M	ECN-0907048(JOANNA)	03JUL2009
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6	7	8
9	10		