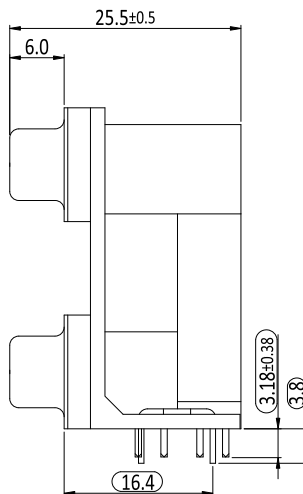
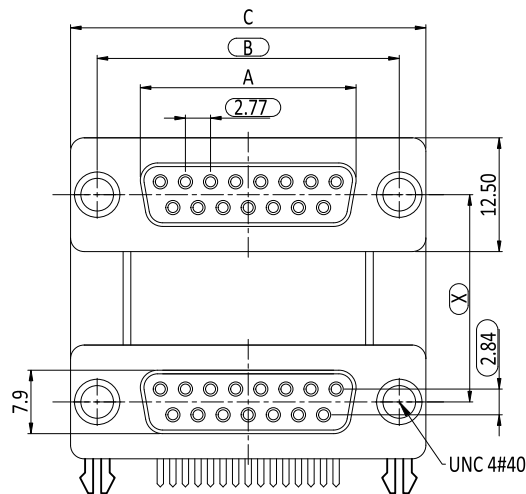
RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCES: ±0.05mm

PIN	A	B	C
9	16.30	25.00	30.8
15	24.60	33.30	39.2
25	38.30	47.10	53.1
37	54.80	63.50	69.4

SPECIFICATION

MATERIAL AND FINISH:

1. INSULATOR: THERMAIL PLASTIC UL94V-0, BLACK
2. CONTACTS: COPPER ALLOY
PLATING: UNDERPLATE: 50~100u" NI
CONTACT AREA: 1~30u" AU
SOLDER TAILS AREA: 100~200u" SN


3. SHELL: STEEL
4. RIVET, BOARDLOCK: COPPER ALLOY

ELECTRICAL CHARACTERISTIC:

1. CURRENT RATING: 3 A MAX.
2. OPERATION VOLTAGE: 250 VAC Max
3. CONTACT RESISTANCE: 25 mΩ MAX.
4. INSULATION RESISTANCE: 3000 MΩ MIN. @ 500 V DC
5. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC / MINUTE

ENVIRONMENT:

1. OPERATING TEMPERATURE RANGE: -55°C TO +105°C

2	50214010020	213AE15DGABAA3	15	GOLD FLASH	SN	19.05mm	6.90mm	
1	50214010010	213AE09DGAAA3	09	GOLD FLASH	SN	15.875mm	6.90mm	
ITEM	NEW P/N	OLD P/N	PIN	CONTACT	SHELL	DIM. "X"	DIM. "Y"	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE			 SIP		 CHANT SINCERE CO.,LTD			
ANG. ±2°			 Cmp Cpk					
0. ±0.50								
0. ±0.30								
.00 ±0.20								
SCALE: AS SHOWN			UNIT: mm		D-SUB DUAL PORT F/F			
DRAWN: HOLLY_TU			15 Jan 2025					
CHECKED: PEARL_HUNG			15 Jan 2025					
APPROVED: PEARL_HUNG			15 Jan 2025		PART NO. 5021401XXXX			
 SIZE A4			SHEET 1/1		REV. B		CODE: 60	
7			8		9		10	
							CUSTOMER:	

	B	ECN-2501052(KIRA)ADD NEW P/N	15JAN2025
	A	ECN-1207033(JOCY)	18JUL2012
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6	7	8
9	10		