

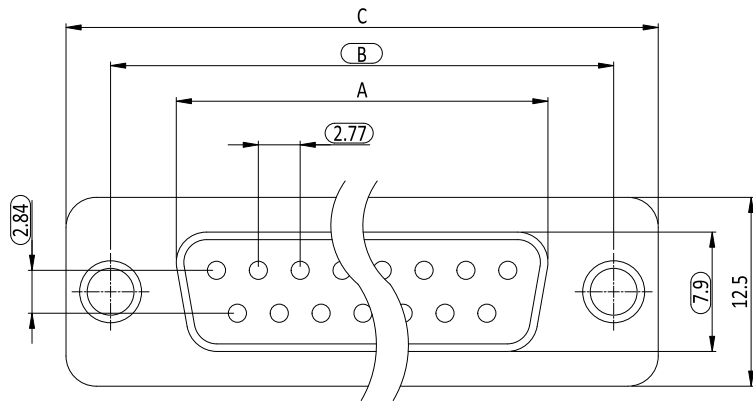
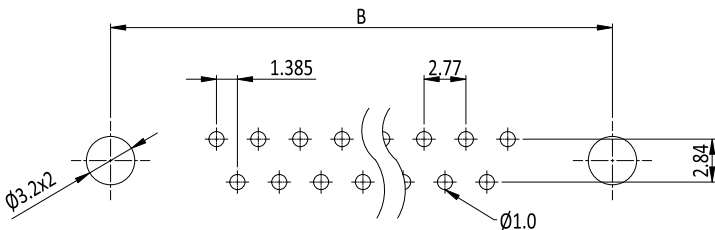


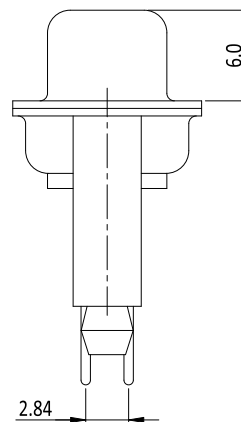

PIN	A	B	C	D
09	16.92	25.00	30.8	19.2
15	25.25	33.30	39.2	27.7
25	38.96	47.10	53.1	41.1
37	55.42	63.50	69.4	57.3

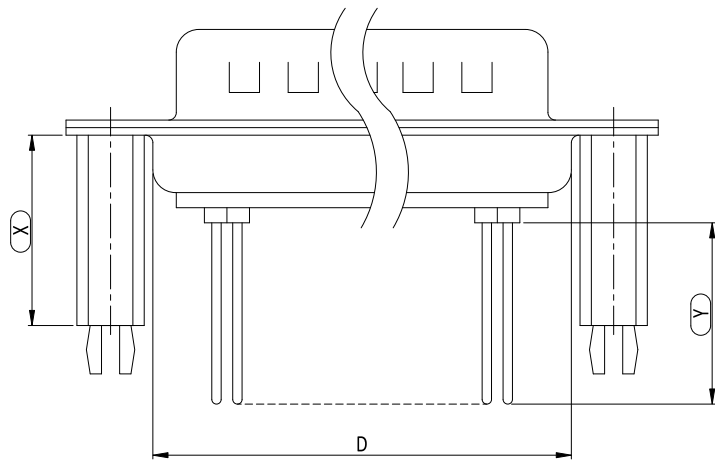

RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCES: $\pm 0.05\text{mm}$

SPECIFICATION

MATERIAL AND FINISH:

1. INSULATOR: THERMAL PLASTIC UL94V-0 , BLACK
2. CONTACTS: COPPER ALLOY
PLATING: 1~30u" SELECTIVE AU OVER 50~100u" Ni
3. SHELL: STEEL
4. RIVET,BOARDLOCK: COPPER ALLOY

ELECTRICAL

1. OPERATION VOLTAGE: 250 VAC MAX.
2. CURRENT RATING: 3 A MAX.
3. CONTACT RESISTANCE: 15 m Ω MAX.
4. INSULATION RESISTANCE: 3000 M Ω MIN. @ 500 VDC
5. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC / MINUTE

ENVIRONMENT:


1. OPERATING TEMPERATURE RANGE: -55°C TO +105°C



4	50222030050	204AE37MGPMEE3	37	GOLD FLASH	SN	12.6mm	13.0mm
3	50222030040	204AE25MGPMEE3	25	GOLD FLASH	SN	12.6mm	13.0mm
2	50222030020	204AE15MGPMEE3	15	GOLD FLASH	SN	12.6mm	13.0mm
1	50222030010	204AE09MGPMEE3	09	GOLD FLASH	SN	12.6mm	13.0mm
ITEM	NEW P/N	OLD P/N	PIN	CONTACT	SHELL	DIM. "X"	DIM. "Y"

UNLESS OTHERWISE
SPECIFIED TOLERANCE

0.0 ± 0.5
0.3 ± 0.3
0.00 ± 0.2



CHANT SINCERE CO.,LTD

SCALE: AS SHOWN	UNIT: mm	TITLE: D-SUB PCB STRAIGHT MACHINED WIRE WRAP	
DRAWN: XINGRU_LAI	25 Feb 2025		
CHECKED: PEARL_HUNG	05 Mar 2025	PART NO. 5022203XXXX	
APPROVED: PEARL_HUNG	05 Mar 2025		
SIZE A4	SHEET 1/1	REV. D	CODE: GC
		CUSTOMER:	

D	ECN-2502032(KIRA)NEW P/N	11FEB2025
C	ECN-0809167(CHERRY)	23AUG2008
B	ECN-0603167(ANGELA)	20MAR2006
ZONE	REVISION	DESCRIPTION
1	2	3