

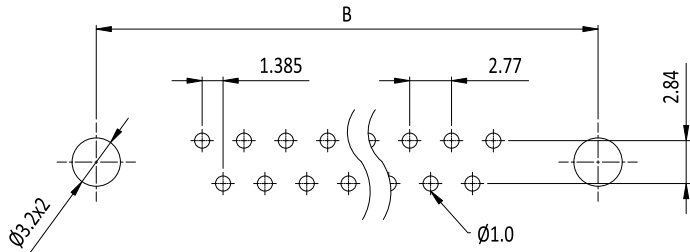
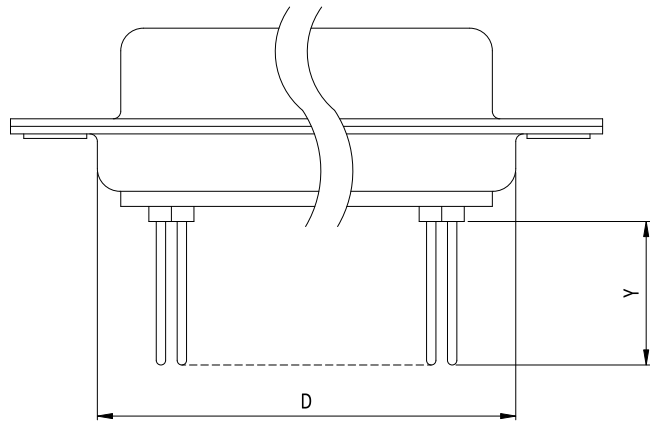


RoHS
compliant

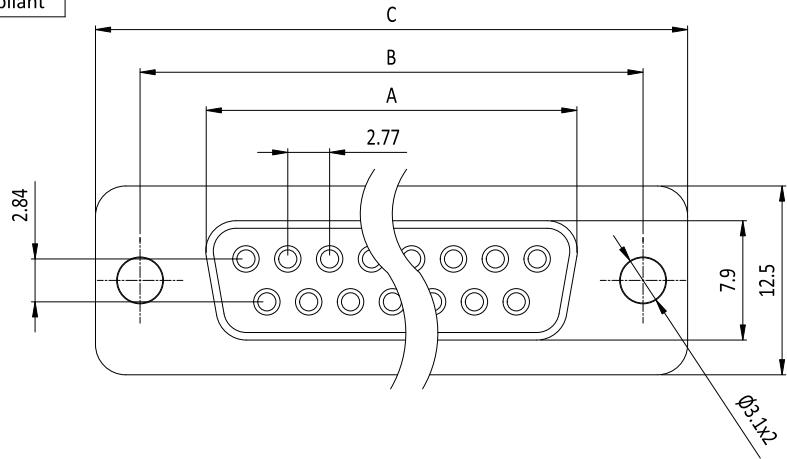

RECOMMENDED PCB LAYOUT (TOP VIEW)
TOLERANCES: $\pm 0.05\text{mm}$

POSITION	A	B	C	D
9F	16.30	25.00	30.8	19.2
15F	24.60	33.30	39.2	27.7
25F	38.30	47.10	53.1	41.1
37F	54.80	63.50	69.4	57.3

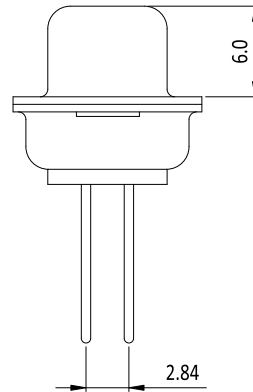

CONTACT LENGTH
DIM. FOR "Y":

13.0mm
9.5mm

SPECIFICATION

MATERIAL AND FINISH:

1. INSULATOR: THERMAL PLASTIC UL94V-0
2. CONTACTS: COPPER ALLOY
PLATING: 1~30u" SELECTIVE AU OVER
50~100u" NI
3. SHELL: STEEL
4. RIVET, BOARDLOCK: COPPER ALLOY


ELECTRICAL CHARACTERISTIC:

1. OPERATION VOLTAGE: 250 VAC MAX.
2. CURRENT RATING: 3 A MAX.
3. CONTACT RESISTANCE: 15 mΩ MAX.
4. INSULATION RESISTANCE: 3000 MΩ MIN @ 500 VDC
5. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC / MINUTE

ENVIRONMENT:

1. OPERATING TEMPERATURE RANGE: -55°C TO +105°C



2							
1	50223010010	204AE09FGTAAE3	9 PIN	GOLD FLASH	SN	13.0mm	BLACK
ITEM	NEW P/N	OLD P/N	PIN NO.	CONTACT	SHELL	DIM. "Y"	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE			 SIP	 CHANT SINCERE CO.,LTD			
0. ±0.5 0 ±0.3 .00 ±0.2			 Cmk Cpk				
SCALE: AS SHOWN			UNIT: mm				
DRAWN: XINGRU_LAI			24 May 2024	TITLE: D-SUB PCB STRAIGHT MACHINED WIRE WRAP			
CHECKED: PEARL_HUNG			30 May 2024				
APPROVED: PEARL_HUNG			30 May 2024	PART NO.		5022301XXXX	
	SIZE A4	SHEET 1/1	REV. E	CODE: GC		CUSTOMER:	
7		8		9		10	

	E	ECN-2405004(JOLIN)NEW P/N	03MAY2024	
	D	ECN-0810043(CHERRY)	08OCT2008	
	C	ECN-0603100(LILLIAN)	08MAR2006	
ZONE	REVISION	DESCRIPTION	DATE	
1	2	3	4	5
1	2	3	4	5