

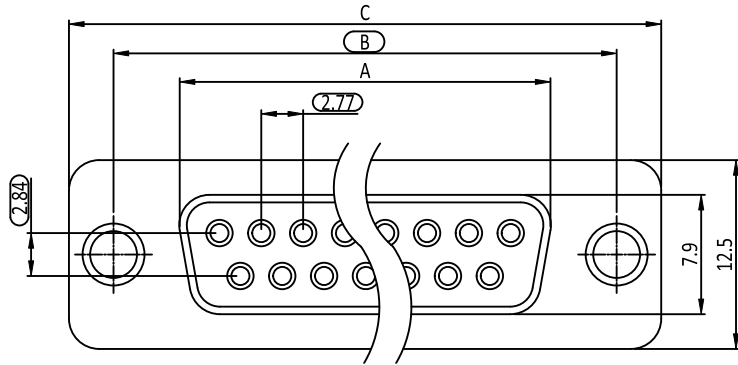
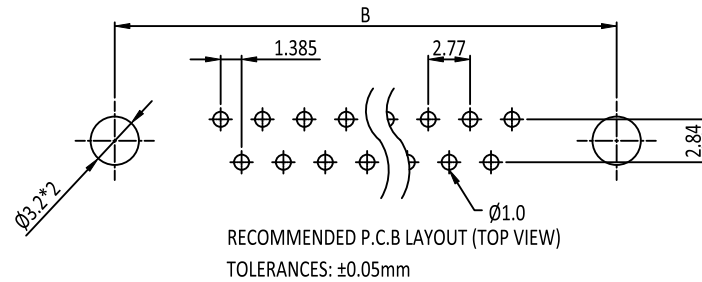


RoHS
compliant

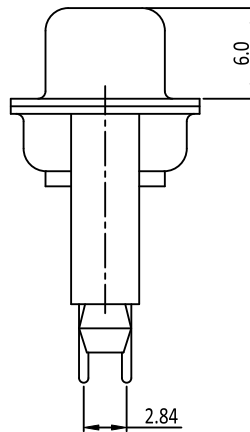

PIN	A	B	C	D
09	16.30	25.00	30.8	19.2
15	24.60	33.30	39.2	27.7
25	38.30	47.10	53.1	41.1
37	54.80	63.50	69.4	57.3

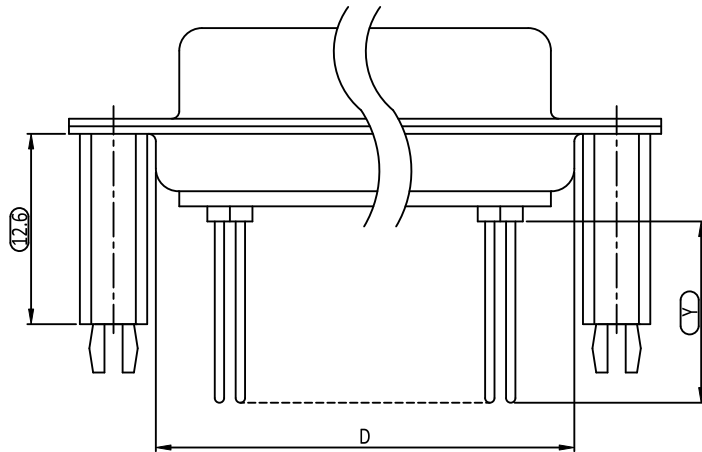

CONTACT LENGTH
DIM. FOR "Y":

13.0mm
9.5mm

SPECIFICATION

MATERIAL AND FINISH:

1. INSULATOR: PBT, RATED UL94V-0
2. CONTACTS: BRASS
PLATING: 1u"~30u" SELECTIVE AU OVER
50u"~100u" NI
3. SHELL: STEEL
4. RIVET, BOARDLOCK: COPPER ALLOY


ELECTRICAL CHARACTERISTIC:

1. OPERATION VOLTAGE: 250 VAC MAX.
2. CURRENT RATING: 3 A MAX.
3. CONTACT RESISTANCE: 15 mΩ MAX.
4. INSULATION RESISTANCE: 3000 MΩ MIN @ 500 VDC
5. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VAC / MINUTE

ENVIRONMENT:

1. TEMPERATURE RANGE: -55°C TO +105°C



1	50223030010	204AE09FGTMEE3	09	GOLD FLASH	SN	13.0mm	BLACK
ITEM	NEW P/N	OLD P/N	PIN	CONTACT	SHELL	DIM. "Y"	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE			 SIP  Cmk Cpk  CHANT SINCERE CO.,LTD				
0.0 ±0.5 0.00 ±0.3 0.00 ±0.2							
SCALE: AS SHOWN		UNIT: mm					
DRAWN: KEVIN_ZHENG		21 Feb 2025					
CHECKED: PEARL_HUNG		10 Mar 2025	TITLE: PDR- D-SUB PCB STRAIGHT MACHINED WIRE WRAP				
APPROVED: PEARL_HUNG		10 Mar 2025					
PART NO.		5022303XXXX					
	SIZE A4	SHEET 1/1	REV. D	CODE: GC		CUSTOMER:	
7		8		9		10	

ZONE	REVISION	DESCRIPTION	DATE
1	D	ECN-2502074(KIRA)NEW P/N	18FEB2025
2	C	ECN-0809178(Cherry)	24SEP2008
3	B	ECN-0603167(Angela)	20MAR2006