


RoHS  
compliant

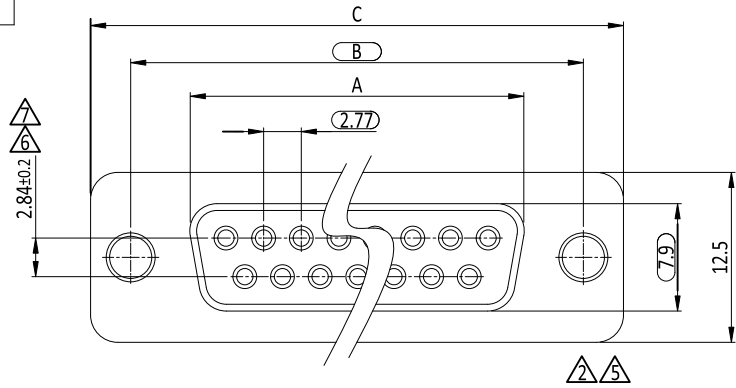



POSITION	A	B	C	D
9	16.30	25.00	30.8	22.4
15	24.60	33.30	39.2	30.8
25	38.30	47.10	53.1	44.5
37	54.80	63.50	69.4	61.4

- 1 SPECIFICATION  
 MATERIAL:  
 1. INSULATOR: THERMAIL PLASTIC UL94V-0  
 2. CONTACTS: COPPER ALLOY  
 3. SHELL: STEEL  
 4. RIVET BOARDLOCK: COPPER ALLOY

- CONTACT PLATING  
 1. UNDERPLATE: 50u~100u" NI  
 2. CONTACT AREA: 1u~30u" SELECTIVE AU

- ELECTRICAL CHARACTERISTIC:  
 1. CURRENT RATING: 3 Amp MAX.  
 2. INSULATION RESISTANCE: 3000 MΩ MINIMUM AT 500 VDC  
 3. VOLTAGE RATING: 100V RMS  
 4. DIELECTRIC WITHSTANDING VOLTAGE: 1000V RMS/Minute

- ENVIRONMENT:  
 1. TEMPERATURE RANGE: -55°C TO +105°C

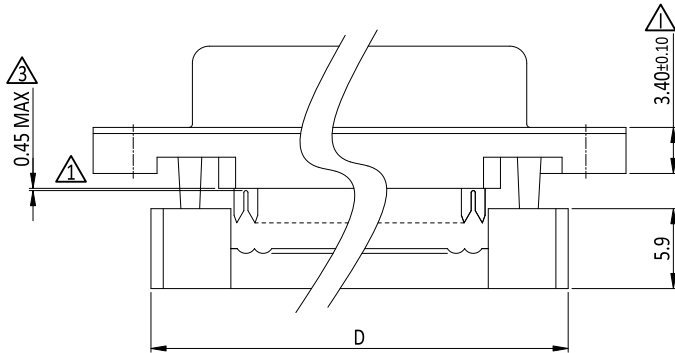

4	50226040040	212AE37FSBAA03	37 PIN	GOLD FLASH(SELECTIVE)	BLACK	
3	50226040030	212AE25FSBAA03	25 PIN	GOLD FLASH(SELECTIVE)	BLACK	
2	50226040020	212AE15FSBAA03	15 PIN	GOLD FLASH(SELECTIVE)	BLACK	
1	50226040010	212AE09FSBAA03	9 PIN	GOLD FLASH(SELECTIVE)	BLACK	
ITEM	NEW P/N	OLD P/N	PIN NO.	CONTACT AREA PLATING	INSULATOR	NOTE

UNLESS OTHERWISE SPECIFIED TOLERANCE  
 ANG. ±5°  
 0. ±0.50  
 .0 ±0.30  
 .00 ±0.20



CHANT SINCERE CO.,LTD

SCALE: AS SHOWN UNIT: mm

DRAWN: BENSON\_ZHENG 01 Feb 2024

CHECKED: PEARL\_HUNG 16 Feb 2024

APPROVED: PEARL\_HUNG 16 Feb 2024

TITLE:  
D-SUB I.D.C. FOR FLAT RIBBON CABLE

PART NO. 5022604XXXX

SIZE A4 SHEET 1/1 REV. J

CODE: GC CUSTOMER:

ZONE	REVISION	DESCRIPTION	DATE
G7	J	ECN-2401072(LITING)REVISE SPEC	18JAN2024
E4	I	ECN-2109069(Liting) 1	28SEP2021
G1	H	ECN-0902065(Joe)	02OCT2009