

SPECIFICATION

MATERIAL AND FINISH:


1. INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED
UL 94V-0 RATED, BLACK COLOR
2. CONTACT: BRASS, FULL GOLD FLASHED
3. SHELL: STEEL, SN OR NI FINISHED
4. GROUNDING BRACKET: BRASS, SN FINISHED

ELECTRICAL CHARACTERISTIC:




1. CONTACT CURRENT RATING: 5.0 A
2. CONTACT RESISTANCE: 30 mΩ MAX.
3. INSULATION RESISTANCE: 5000 MΩ MIN.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC MIN.

ENVIRONMENT:

1. OPERATING TEMPERATURE RANGE: -55°C TO +105°C

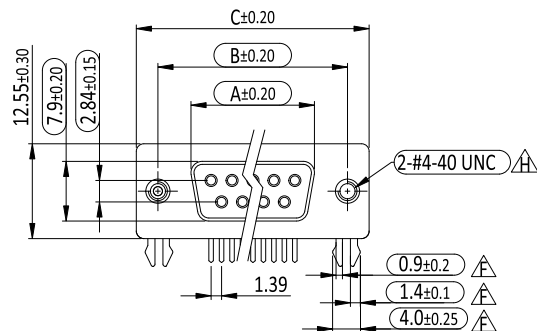


PIN	A±0.20	B±0.20	C±0.20	D
09	16.34	24.99	30.90	11.08
15	24.76	33.32	39.24	19.30
25	38.40	47.04	53.10	33.24
37	54.89	63.50	69.50	49.86

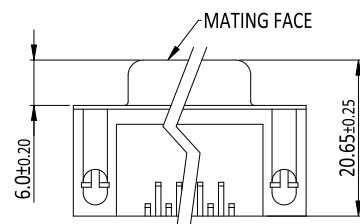

8	50234030080	206AE09FDNBBA3	09	30u" AU/SN	NI	W/O SCREWS
7	50234030070	206AE25FZNBBA3	25	30u" AU	NI	W/O SCREWS
6	50234030060	206AE25FZTBBA3	25	30u" AU	SN	W/O SCREWS
5	50234030050	206AE09FCTBBA3	09	15u" AU/SN	SN	W/O SCREWS
4	50234030040	206AE37FGTBBA3	37	GOLD FLASH	SN	W/O SCREWS
3	50234030030	206AE25FGTBBA3	25	GOLD FLASH	SN	W/O SCREWS
2	50234030020	206AE15FGTBBA3	15	GOLD FLASH	SN	W/O SCREWS
1	50234030010	206AE09FGTBBA3	09	GOLD FLASH	SN	W/O SCREWS
ITEM	NEW P/N	OLD P/N	PIN	CONTACT	SHELL	SCREWS

UNLESS OTHERWISE
SPECIFIED TOLERANCE

ANG. ±5°
0. ±0.5
.0 ±0.3
.00 ±0.25



SCALE: AS SHOWN

UNIT: mm



CHANT SINCERE CO., LTD

DRAWN: KEVIN_ZHENG 24 Jun 2024
CHECKED: PEARL_HUNG 24 Jun 2024
APPROVED: PEARL_HUNG 24 Jun 2024

TITLE: D-SUB PCB RIGHT ANGLE
FOOTPRINT: 10.3mm FEMALE

PART NO. 5023403XXXX

SIZE A4 SHEET 1/1 REV. H

CODE: H03 CUSTOMER:

C4, C5, F3, F4	H	ECN-2405092(QUEENIE)MODIFY CALLOUTS	21JUN2024
	G	ECN-2405019(JOLIN)NEW P/N	08MAY2024
(3,E)	F	ECN-2107007(NINA) ADD DIMENSION	02JUL2021
ZONE	REVISION	DESCRIPTION	DATE