

SPECIFICATION

MATERIAL AND FINISH:




1. INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED
UL 94V-0 RATED, BLACK
2. CONTACT: BRASS
FINISHED: SELECTIVE GOLD FLASH
3. SHELL: STEEL, SN OR NI FINISHED
4. GROUNDING BRACKET: BRASS, SN FINISHED
5. JACK SCREWS: BRASS, NI FINISHED
WITH #4-40 THREADED ASSEMBLED

ELECTRICAL CHARACTERISTIC:


1. CONTACT CURRENT RATING: 5.0 A
2. CONTACT RESISTANCE: 30 mΩ MAX.
3. INSULATION RESISTANCE: 5000 MΩ MIN.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC MIN.

ENVIRONMENT:


1. TEMPERATURE RATING : -55°C ~ +105°C

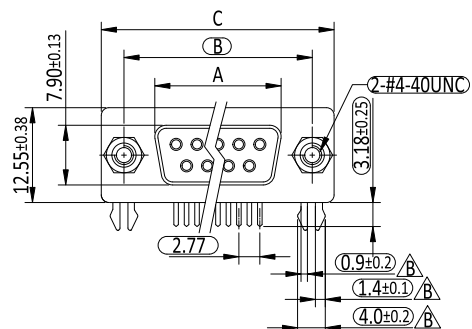

PIN	A±0.20	B±0.20	C±0.20	D
09	16.34	24.99	30.90	11.08
15	24.76	33.32	39.24	19.30
25	38.40	47.04	53.10	33.24
37	54.89	63.50	69.50	49.86

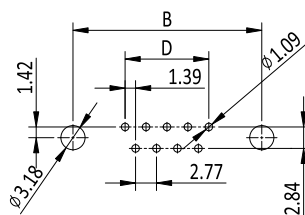

PCB LAYOUT
TOLERANCES: ±0.05mm

4	50234040040	206AE37FGTAAC3	37	GOLD FLASH	SN	W/ BOARDLOCK, W/SCREWS(4.8x11.8)						
3	50234040030	206AE25FGTAAC3	25	GOLD FLASH	SN	W/ BOARDLOCK, W/SCREWS(4.8x11.8)						
2	50234040020	206AE15FGTAAC3	15	GOLD FLASH	SN	W/ BOARDLOCK, W/SCREWS(4.8x11.8)						
1	50234040010	206AE09FGTAAC3	09	GOLD FLASH	SN	W/ BOARDLOCK, W/SCREWS(4.8x11.8)						
ITEM	NEW P/N	OLD P/N	PIN	CONTACT	SHELL	NOTE						
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±2° 0. ±0.50 .0 ±0.30 .00 ±0.20			 SIP  Cmk Cpk		 CHANT SINCERE CO.,LTD							
						SCALE: AS SHOWN		UNIT: mm				
						DRAWN: HOLLY_TU		13 Jan 2025				
						CHECKED: PEARL_HUNG		15 Jan 2025				
						APPROVED: PEARL_HUNG		15 Jan 2025				
			SIZE	A4	SHEET	1/1	REV.	C	CODE:	H03	CUSTOMER:	
7			8			9			10			