

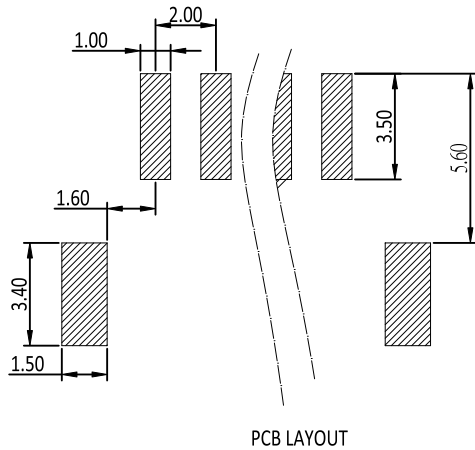
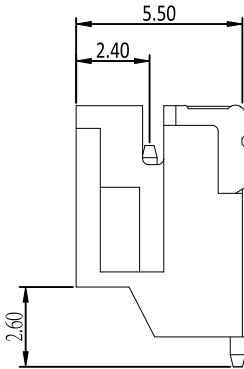


RoHS
compliant

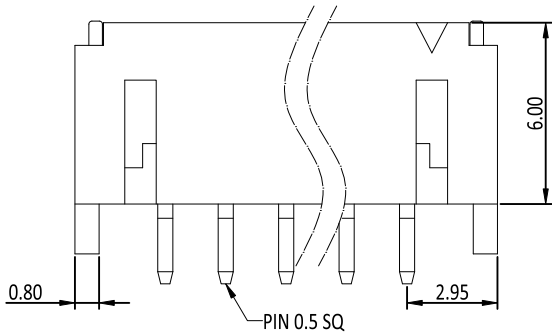

SPECIFICATION
MATERIAL AND FINISH:
1. INSULATOR: HIGH TEMPERATURE THERMOPLASTIC
UL 94V-0, NATURAL
2. CONDUCTOR: BRASS, SN PLATED

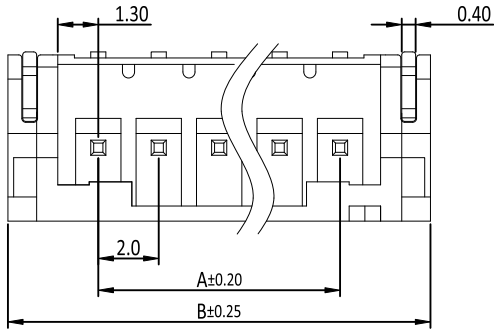

PIN	DIM. A	DIM. B	DIM. C
2	2.00	7.90	4.60
3	4.00	9.90	6.60
4	6.00	11.98	8.60
5	8.00	13.98	10.60
6	10.00	15.98	12.60
7	12.00	17.98	14.60
8	14.00	19.98	16.60
9	16.00	21.98	18.60
10	18.00	23.98	20.60
11	20.00	25.98	22.60
12	22.00	27.98	24.60
13	24.00	29.98	26.60
14	26.00	32.98	28.60
15	28.00	33.98	30.60
16	30.00	35.98	32.60

XXX=PIN NO. (EX. 002=2P)

1	5110302XXX0	311DEXXMATB1R1D4	GRAY	BAG	
ITEM	NEW P/N	OLD P/N	INSULATOR COLOR	PACKING	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±2° 0 ±0.30 0.00 ±0.20 0.000 ±0.10			SIP Cmk Cpk	 CHANT SINCERE CO.,LTD	
SCALE: AS SHOWN		UNIT: mm			
DRAWN: HOLLY_TU		10 Feb 2025		TITLE: WAFER SMT PITCH 2.0mm	
CHECKED: PEARL_HUNG		10 Feb 2025			
APPROVED: PEARL_HUNG		10 Feb 2025		PART NO.	5110302XXXX
		SIZE A4	SHEET 1/1	REV. A	CUSTOMER:

	A	ECN-2501099(KIRA)ADD NEW P/N	22JAN2025
	X1	ECR-1309056(PEARL)	24OCT2013
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
			5
			6