

RoHS
compliant


SPECIFICATION
MATERIAL AND FINISH:
1. HOUSING: NYLON-66, UL94V-0, GRAY
2. CONTACT: BRASS, SN PLATED



ELECTRICAL CHARACTERISTIC:
1. CONTACT RESISTANCE: 20 mΩ MAX.
2. INSULATION RESISTANCE: 500 MΩ MIN.
3. WITHSTANDING VOLTAGE: 500V AC/MINUTE
4. CURRENT RATING: 1A AC,DC
5. VOLTAGE RATING: 100V AC, DC




ENVIRONMENT:
1. OPERATING TEMPERATURE RANGE: -25°C TO +85°C

PIN NO.	A(mm)	B(mm)
02P	1.50	4.50
03P	3.00	6.00
04P	4.50	7.50
05P	6.00	9.00
06P	7.50	10.5
07P	9.00	12.00
08P	10.5	13.50
09P	12.00	15.00
10P	13.50	16.50
11P	15.00	18.00
12P	16.50	19.50
13P	18.00	21.00

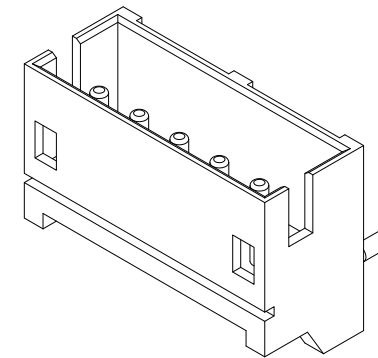

4P(含4P)以下打"K"

5P(含5P)以下打"K"

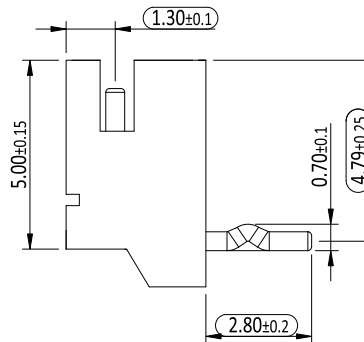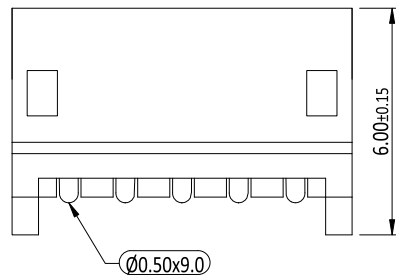

PCB HOLE LAYOUT

XXX=PIN NO.(002~013)(EX.002=02P)

2			
1	5112501XXX0	311AEXXMATA3R1D4	
ITEM	NEW P/N	OLD P/N	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE		SIP ST Cmk Cpk	 CHANT SINCERE CO.,LTD
.0 ±0.20 .00 ±0.15 .000 ±0.10		SCALE: AS SHOWN UNIT: mm	
DRAWN:	XINGRU_LAI	10 Mar 2025	TITLE: 1.5mm WAFER RIGHT ANGLE DIP TYPE
CHECKED:	PEARL_HUNG	10 Mar 2025	PART NO. 5112501XXXX
APPROVED:	PEARL_HUNG	10 Mar 2025	CODE: W3 CUSTOMER:
SIZE A4	SHEET 1/1	REV. B	

	B	ECN-2502048(KIRA)NEW P/N	12FEB2025
	A	ECN-215080(KELVIN)X1 CHANGE TO A	31MAY2021
	X1	ECR-1610014(BETTY)	06OCT2016
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6	7	8
9	10		