

RoHS
compliant





SPECIFICATION
MATERIAL AND FINISH:
1. INSULATOR: NYLON 66 + 30% GLASS FIBER
2. CONTACT: BRASS



ELECTRICAL CHARACTERISTIC:
1. CURRENT RATE: 3 A
2. CONTACT RESISTANCE: 20 mΩ MAX.
3. INSULATION RESISTANCE: 1000 MΩ MIN.
4. DIELECTRIC VOLTAGE: 1000V AC FOR ONE MINUTE

ENVIRONMENT:
1. OPERATING TEMPERATURE RANGE: -25°C TO +125°C

PIN 1

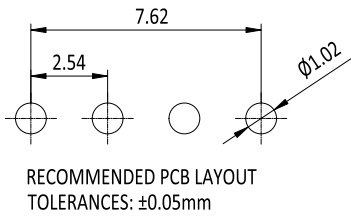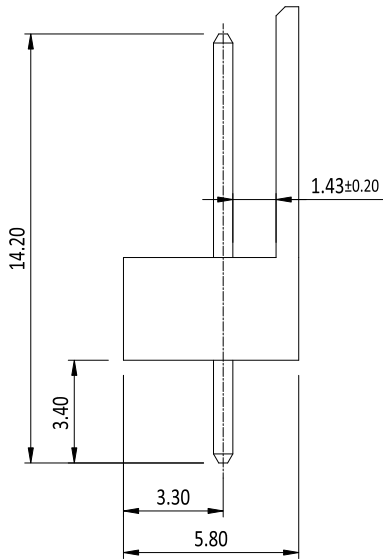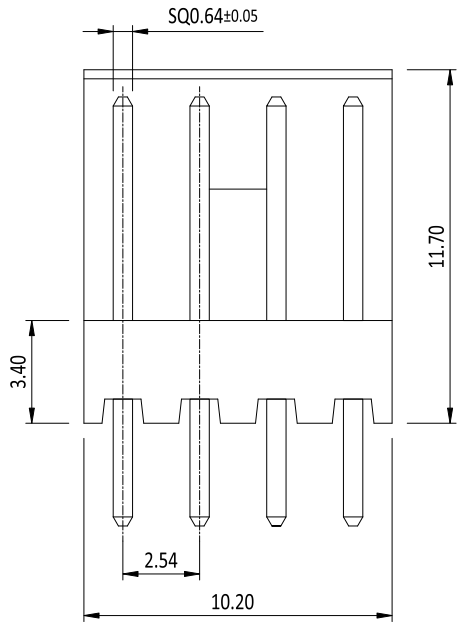

2					
1	51128500040	311AE04MAGB3S6D1	GOLD FLASH	WHITE	
ITEM	NEW P/N	OLD P/N	CONTACT	COLOR	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±3° .0 ±0.35 .00 ±0.25			SIP Cmk Cpk	 CHANT SINCERE CO.,LTD	
SCALE: AS SHOWN			UNIT: mm		
DRAWN: XINGRU_LAI			30 Dec 2024	TITLE: WAFER PITCH 2.54mm	
CHECKED: PEARL_HUNG			30 Dec 2024		
APPROVED: PEARL_HUNG			30 Dec 2024	PART NO.	51128500040
	SIZE A4	SHEET 1/1	REV. A	CODE: p	CUSTOMER:

	A	ECN-2412032(KIRA)NEW P/N		10DEC2024	
	X1	ECR-1603019(BEN)		07MAR2016	
ZONE	REVISION	DESCRIPTION	DATE		
1	2	3	4	5	6