
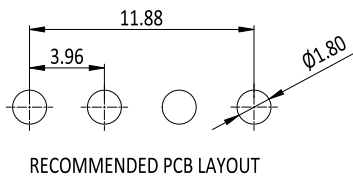
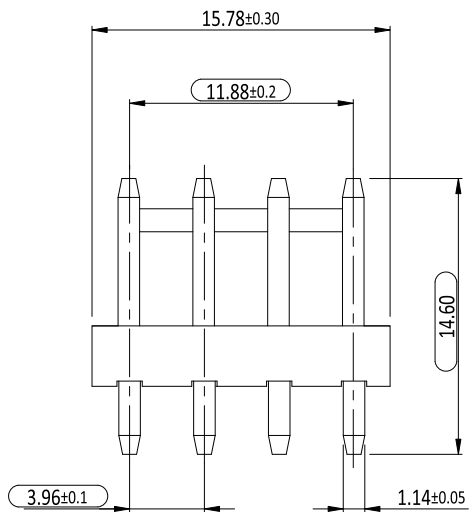


RoHS
compliant

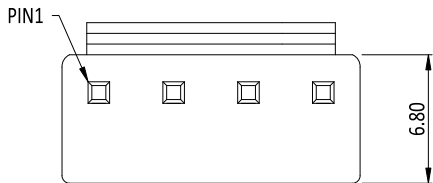

SPECIFICATION

MATERIAL AND FINISH:

1. CONTACT: BRASS, SN PLATED
2. BASE : NYLON 66 UL94V-0

ELECTRICAL CHARACTERISTIC:

1. CONTACT RESISTANCE: 20 mΩ MAX.
2. INSULATION RESISTANCE: 1000 MΩ MIN.
3. WITHSTANDING VOLTAGE: 1500V AC/MINUTE
4. CURRENT RATING: 7A AC/DC
5. VOLTAGE RATING: 250V AC/DC

ENVIRONMENT:

1. OPERATING TEMPERATURE RANGE: -25°C TO +85°C



2					
1	51130010040	311AE04MATC2S1D1	SN	WHITE	
ITEM	NEW P/N	OLD P/N	CONTACT	COLOR	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±3° .0 ±0.30 .00 ±0.20			SIP Cmk Cpk	 CHANT SINCERE CO.,LTD	
SCALE: AS SHOWN			UNIT: mm		
DRAWN: XINGRU_LAI			17 Dec 2024	TITLE: 3.96mm WIRE-TO-BOARD HEADER DIP 180° TYPE	
CHECKED: PEARL_HUNG			17 Dec 2024		
APPROVED: PEARL_HUNG			17 Dec 2024	PART NO.	51130010040
	SIZE A4	SHEET 1/1	REV. A	CODE: p	CUSTOMER:

	A	ECN-2412028(KIRA)NEW P/N	10DEC2024
	X1	ECR-17080070(LITING)	16AUG2017
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6	7	8
9	10		