

RoHS
compliant



SPECIFICATION

MATERIAL AND FINISH:

1. CONTACT: BRASS, SN PLATED
2. BASS: NYLON ++UL 94V-2

ELECTRICAL CHARACTERISTIC:





1. CURRENT RATING : 7 A AC/DC
2. VOLTAGE RATING : 250 V AC/DC
3. CONTACT RESISTANCE : 20 mΩ MAX.
4. INSULATION RESISTANCE : 1000 MΩ MIN.
5. WITHSTANDING VOLTAGE : 1500 V AC/MINUTE

ENVIRONMENT:


1. TEMPERATURE RESISTANCE : -25°C TO + 85°C

PACKING STYLE:

1. 1000PCS./BAG

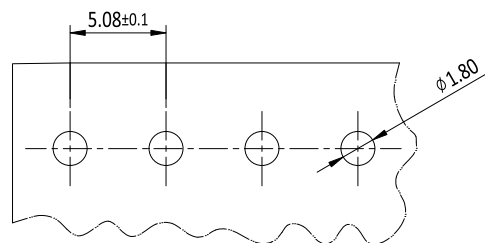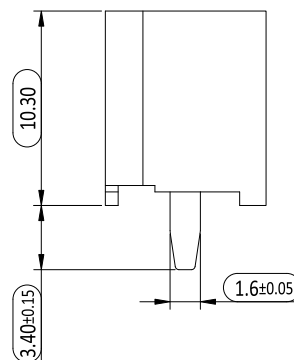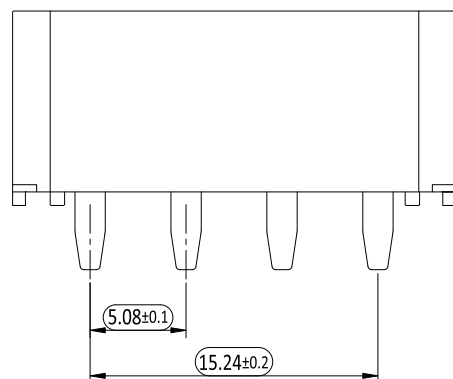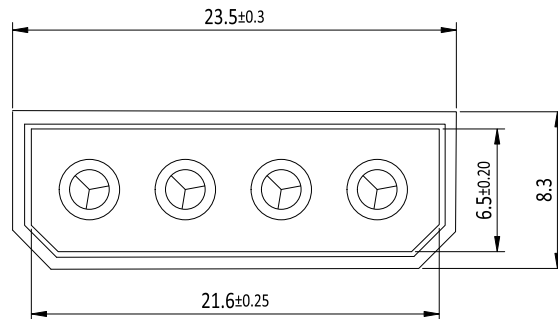

RECOMMEND PCB LAYOUT

1	51132010040	311AE04FATE1S0D9	SN	TRANSPARENCY	
ITEM	NEW P/N	OLD P/N	PLATING	COLOR	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±3° 0 ±0.30 .00 ±0.20			 SIP  Cmk Cpk  CHANT SINCERE CO.,LTD		
SCALE: AS SHOWN		UNIT: mm			
DRAWN: HOLLY_TU		17 Dec 2024	TITLE: WAFER PITCH 5.08mm		
CHECKED: PEARL_HUNG		17 Dec 2024			
APPROVED: PEARL_HUNG		17 Dec 2024	PART NO. 51132010040		
		SIZE A4	SHEET 1/1	REV. A	CODE: p CUSTOMER:
7		8		9	10

	A	ECN-2412049(KIRA)CHANGE TO A		12DEC2024	
	X1	ECR-1603041(BEN)		14MAR2016	
ZONE	REVISION	DESCRIPTION	DATE		
1	2	3	4	5	6