
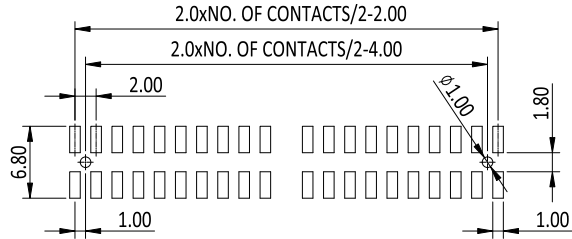
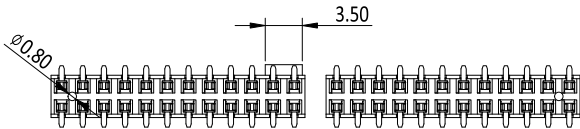
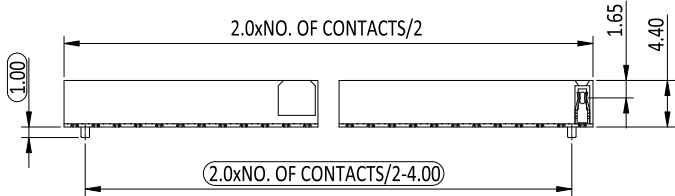
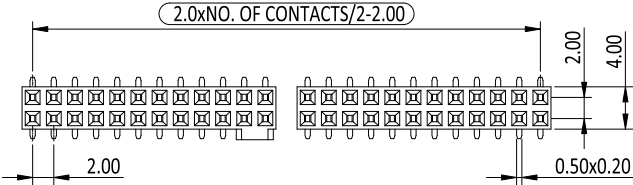



SPECIFICATION
MATERIAL AND FINISH:
1. INSULATOR: PA6T, UL 94V-0, BLACK
2. CONTACT: PHOSPHOR BRONZE
PLATING: SN, GOLD PLATED
STANDARD: GOLD FLASH ALL OVER


ELECTRICAL CHARACTERISTIC:
1. CURRENT RATING: 2 A
2. CONTACT RESISTANCE: 20 mΩ MAX.
3. INSULATOR RESISTANCE: 5000 MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500 V AC

ENVIRONMENT:
1. OPERATING TEMPERATURE: -40°C ~ +105°C
2. MAX PROCESSING TEMP: 230°C FOR 60 SECONDS
260°C FOR 10 SECONDS

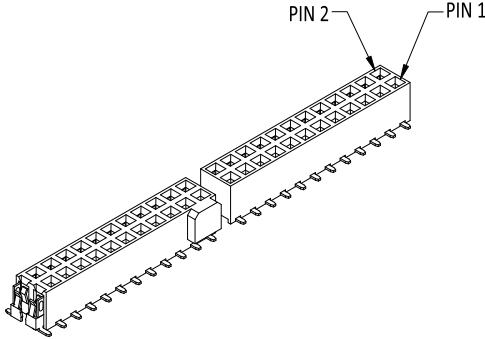

RECOMMENDED PCB SMD LAYOUT
TOLERANCES: ±0.05mm

XXX=PIN NO.(004~040)(EX. 004=2x2P)

1	5132202XXX0	604DEXXSGMS02AB3	GOLD FLASH	W/NOSE, TUBE
ITEM	NEW P/N	OLD P/N	CONTACT	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE		SIP	 CHANT SINCERE CO.,LTD	
X ±0.3 XX ±0.20 XXX ±0.100		ST Cmk Cpk		
SCALE: AS SHOWN		UNIT: mm	TITLE: FEMALE HEADER (PITCH: 2.0mm)	
DRAWN: HOLLY_TU		26 Dec 2024		
CHECKED: PEARL_HUNG		30 Dec 2024	PART NO. 5132202XXXX	
APPROVED: PEARL_HUNG		30 Dec 2024		
	SIZE A4	SHEET 1/1	REV. E	CODE: C6
				CUSTOMER:

	E	ECN-2412085(KIRA)ADD NEW P/N	26DEC2024
	D	ECN-1502012(STEVE) 加入SIP	06FEB2015
	C	ECN-1306042(WENDY)CHANGE OUTLINE	13NOV2013
ZONE	REVISION	DESCRIPTION	DATE