




SPECIFICATION
MATERIAL AND FINISH:
1. INSULATOR: PA6T, BLACK
2. CONTACT: PHOSPHOR BRONZE

ELECTRICAL CHARACTERISTIC:
1. CURRENT RATE: 1 A
2. CONTACT RESISTANCE: 20 mΩ MAX.
3. INSULATION RESISTANCE: 5000 MΩ MIN.
4. DIELECTRIC VOLTAGE: AC 500 V FOR 1 MINUTE


ENVIRONMENT:
1. OPERATION TEMPERATURE: -40°C TO + 105°C

PACKING STYLE:
1. TUBE

POLES	DIM A	DIM B	POLES	DIM A	DIM B
			21	42.00	40.00
2	4.00	2.00	22	44.00	42.00
3	6.00	4.00	23	46.00	44.00
4	8.00	6.00	24	48.00	46.00
5	10.00	8.00	25	50.00	48.00
6	12.00	10.00	26	52.00	50.00
7	14.00	12.00	27	54.00	52.00
8	16.00	14.00	28	56.00	54.00
9	18.00	16.00	29	58.00	56.00
10	20.00	18.00	30	60.00	58.00
11	22.00	20.00	31	62.00	60.00
12	24.00	22.00	32	64.00	62.00
13	26.00	24.00	33	66.00	64.00
14	28.00	26.00	34	68.00	66.00
15	30.00	28.00	35	70.00	68.00
16	32.00	30.00	36	72.00	70.00
17	34.00	32.00	37	74.00	72.00
18	36.00	34.00	38	76.00	74.00
19	38.00	36.00	39	78.00	76.00
20	40.00	38.00	40	80.00	78.00

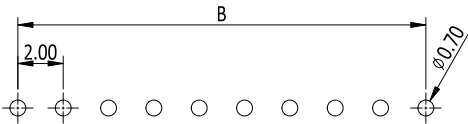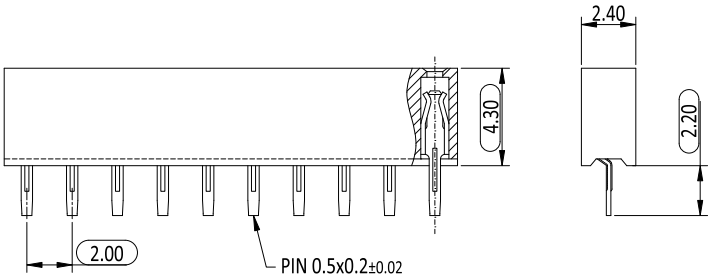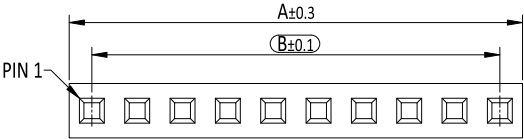

RECOMMENDED PCB LAYOUT
TOLERANCES: ±0.05mm

XXX=PIN NO. (002~040)						
2	5133201XXX1	604AEXXSGLS03BB3	GOLD FLASH	PIN2 REMOVED		
1	5133201XXX0	604AEXXSGLS030B3	GOLD FLASH			
ITEM	NEW P/N	OLD P/N	PLATING	NOTE		
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±3° 0 ±0.30 .00 ±0.20		 SIP  ST  Cmk  Cpk	 CHANT SINCERE CO.,LTD			
SCALE: AS SHOWN		UNIT: mm				
DRAWN: HOLLY_TU		26 Dec 2024			TITLE: FEMALE HEADER 2.0x2.0mm STRAIGHT TYPE, SINGLE ROW, HEIGHT 4.3mm	
CHECKED: PEARL_HUNG		30 Dec 2024				
APPROVED: PEARL_HUNG		30 Dec 2024				
		SIZE A4	SHEET 1/1	REV. C	PART NO. 5133201XXXX	
CODE: p			CUSTOMER:			

	C	ECN-2412083(KIRA) ADD NEW DRAWN	26DEC2024
	B	ECN-1409038(ALICE)	16SEP2014
	A	ECN-1304022(JOCY)	15APR2013
ZONE	REVISION	DESCRIPTION	DATE