

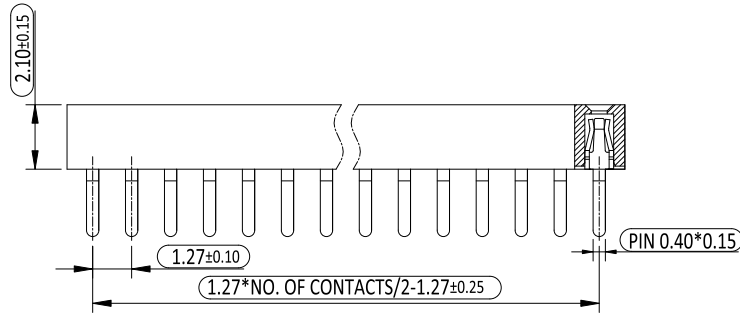



RoHS
compliant

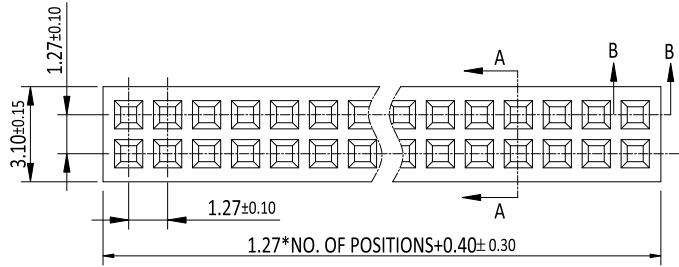

SECTION B-B



SECTION A-A

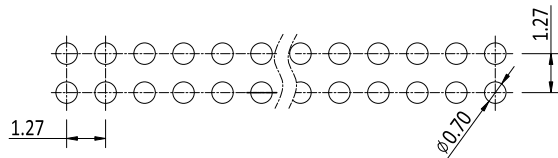

RECOMMENDED PCB LAYOUT (TOP SIDE)
TOLERANCE±0.05

SPECIFICATION

MATERIAL AND FINISH:

1. CODING HOUSING: PA9T+30%G.F. UL94V-0, BLACK
2. CONTACT: PHOSPHOR BRONZE
- PLATING AREA: AU OVER NI

ELECTRICAL CHARACTERISTIC:

1. INSULATION RESISTANCE: 1000 MΩ MIN.
2. WITHSTANDING VOLTAGE: 500V AC/DC
3. CURRENT RATING: 1.0 A
4. CONTACT RESISTANCE: 20 mΩ MAX.

ENVIRONMENT:

1. OPERATING TEMPERATURE RANGE: -40°C TO +105°C

PACKING STYLE:

1. TUBE



XXX=PIN NO. (002~050)

2				
1	5134202XXX0	715AEXXGDS010B3	GOLD FLASH	
ITEM	NEW P/N	OLD P/N	CONTACT PLATING	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE			SIP Cmk Cpk	 CHANT SINCERE CO.,LTD
ANG.	±3°			
.0	±0.40			
.00	±0.25			
.000	±0.15			
SCALE:	AS SHOWN	UNIT:	mm	
DRAWN:	RITA_CHANG	27 Nov 2024	TITLE: FEMALE HEADER DIP (1.27x1.27mm)	
CHECKED:	PEARL_HUNG	27 Nov 2024		
APPROVED:	PEARL_HUNG	27 Nov 2024	PART NO.	5134202XXXX
	SIZE A4	SHEET 1/1	REV. A	CUSTOMER:

	A	ECN-2411111(KIRA)ADD. NEW P/N & RELEASE A VER.	27NOV2024		
	X1	ECR-1403056(PEARL)	19MAR2019		
ZONE	REVISION	DESCRIPTION	DATE		
1	2	3	4	5	6