
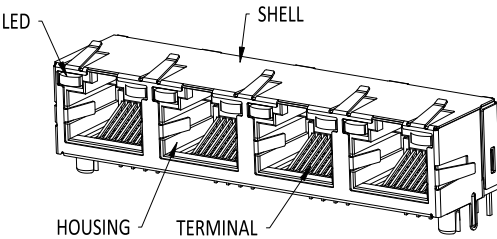
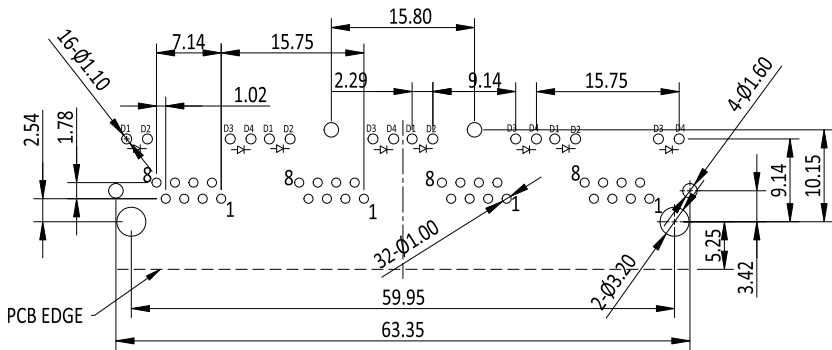

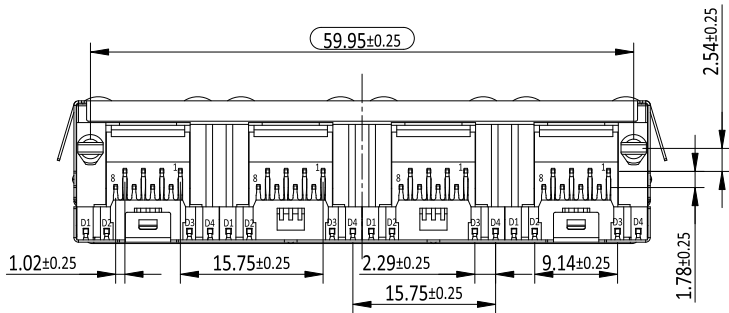
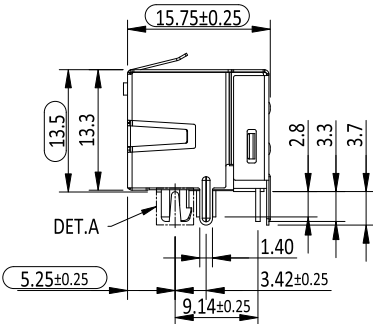



SPECIFICATION
MATERIAL AND FINISH:
1. HOUSING: THERMOPLASTIC UL94V-0, BLACK
2. CONTACT: SELECTIVE AU PLATING
3. TERMINAL: 0.35mm THICKNESS COPPER ALLOY
PLATED WITH AU AND SN IN SOLDER AREA
4. SHELL: COPPER ALLOY, NI PLATING

ELECTRICAL CHARACTERISTIC:
1. INSULATION RESISTANCE: 500MΩ MIN.
2. CONTACT RESISTANCE: 50mΩ MAX.
3. WITHSTAND VOLTAGE: 1000 VAC 1 MINUTE
4. CURRENT RATING: 1.5A

ENVIRONMENT:
1. OPERATING TEMPERATURE RANGE: -40°C TO +80°C

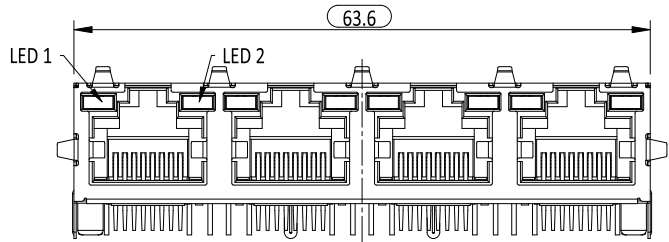

RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE: ±0.05mm
PCB THICKNESS: 1.60±0.05mm

1	51502020010	415BE44JS2F214A3	SELECTIVE AU	YELLOW LED1, GREEN/ORANGE LED2
ITEM	NEW P/N	OLD P/N	CONTACT PLATING	TYPE
UNLESS OTHERWISE SPECIFIED TOLERANCE 0.0 ±0.25 .00 ±0.15 .000 ±0.075		 SIP  Cmk Cpk	 CHANT SINCERE CO.,LTD	
SCALE: AS SHOWN		UNIT: mm		
DRAWN: XINGRU_LAI		10 Apr 2024		
CHECKED: PEARL_HUNG		25 Apr 2024	TITLE: RJ45	
APPROVED: PEARL_HUNG		25 Apr 2024	PART NO. 51502020010	
	SIZE A4	SHEET 1/1	REV. A	
7		8	9	10

A	A	ECR-2403050(JOLIN)NEW P/N	15MAR2024
	X3	ECR-1702086(BEN)	23FEB2017
	X2	ECR-1605029(BEN)ADD OPERATION TEMPERATURE	13MAY2016
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4