

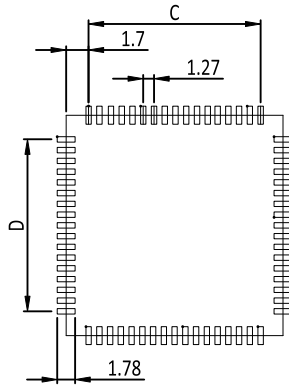
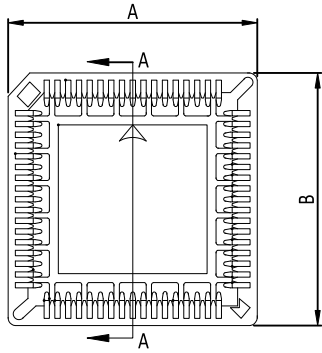


RoHS
compliant

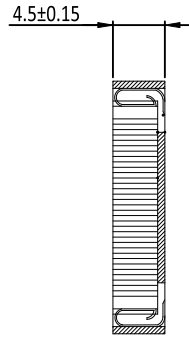


P.C.B LAYOUT

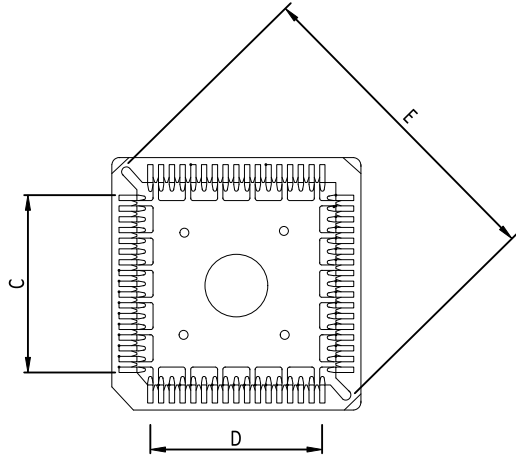

SECTION A-A


Insulator Material:PPS&40% Glase Fiber(UL 94V-0)
Contact Resistance:30M W MAX at Dc 100ma
Insulator Resistance:1000M W Min at Dc 500V
Current Rating:1AMP
Dielectric wuthstanding voltage:Ac 500V for 1 minute
Temperature Rating: -55°C ~ +105°C
Contact Material:Phosphor Bronze

PIN NO	A±0.3	B±0.3	C±0.3	D±0.3	E±0.3
20	15.24	15.24	5.08	5.08	16.70
28	17.78	17.78	7.62	7.62	20.30
32	18.20	20.74	7.62	10.16	22.76
44	23.28	23.28	12.70	12.70	28.05
52	25.74	25.74	15.24	15.24	31.13
68	30.82	30.82	20.32	20.32	38.31
84	35.90	35.90	25.40	25.40	45.50

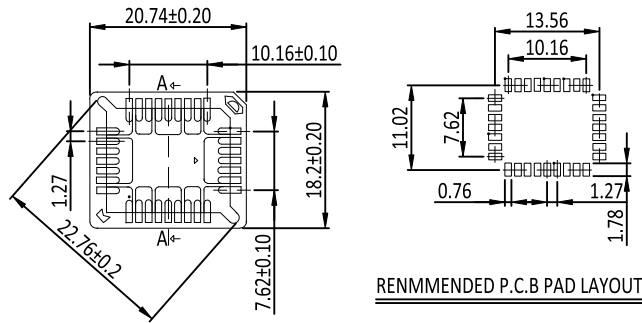

RENMMENDED P.C.B PAD LAYOUT

32Pin Type



XXX=PIN NO.

5200101XXX1	402DEXXPTA0105	TIN PLATED	BROWN	REEL
5200101XXX0	402DEXXPTA0005	TIN PLATED	BROWN	TUBE
NEW P/N.	OLD P/N.	CONTACT PLATING	INSULATOR COLOR	PACKING

UNLESS OTHERWISE
SPECIFIED TOLERANCE



CHANT SINCERE CO.,LTD
TEL:+886-2-8647-1251 WWW.COXOC.COM.TW

SCALE: AS SHOWN UNIT: mm

DRAWN: KEVIN_ZHENG 12 07 2023

CHECKED: PEARL_HUNG 12 07 2023

APPROVED: PEARL_HUNG 12 07 2023

REV. F




TITLE: PLCC SOCKET-SMT TYPE

PART NO. 5200101XXXX C

CODE: 93 CUSTOMER:

	F	ECN-2306061(VICKY)CHANGE OUTLINE	19JUN2023
A6,E5	E	ECN-1501001(STEVE)	02MAR2015
ZONE	REVISION	DESCRIPTION	DATE

RoHS
compliant

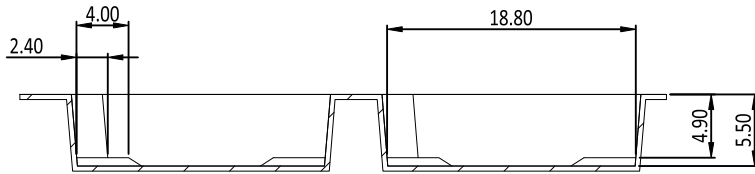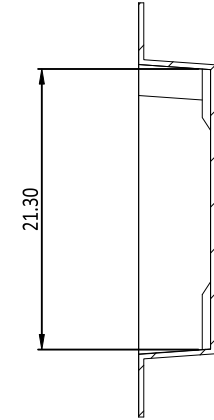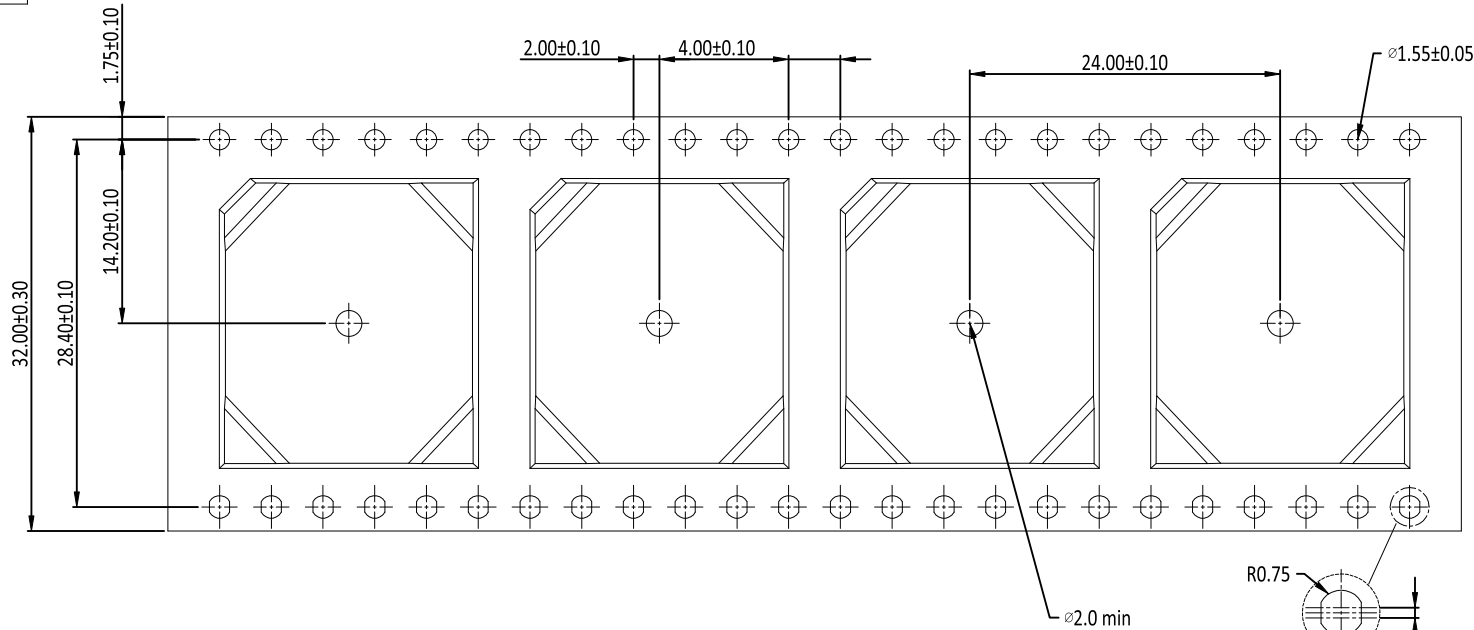

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 100mm.
3. Material : Black Conductive Polystyrene Alloy (UP-5000) 100% recyclable.
4. All dimensions meet EIA-481-3 requirements.
5. Thickness : 0.30 ± 0.05 mm.
6. Packing length per 22" reel : 38.5 Meters.
7. Component load per 13" reel : 400 pcs.

W	32.00 ± 0.30
A0	18.80 ± 0.10
B0	21.30 ± 0.10
K0	5.50 ± 0.10
K1	4.90 ± 0.10

UNLESS OTHERWISE
SPECIFIED TOLERANCE



SCALE: AS SHOWN

UNIT: mm

DRAWN: KEVIN_ZHENG

12 07 2023

CHECKED: PEARL_HUNG

12 07 2023

APPROVED: PEARL_HUNG

12 07 2023

TITLE:

packing for 32p


PART NO.

5200101XXXX

CODE: 93



CUSTOMER:

	F	ECN-2306061(VICKY)CHANGE OUTLINE	19JUN2023		
	E	ECN-1501001(STEVE)	02MAR2015		
ZONE	REVISION	DESCRIPTION	DATE		



SIZE A4 SHEET 2/5

REV. F

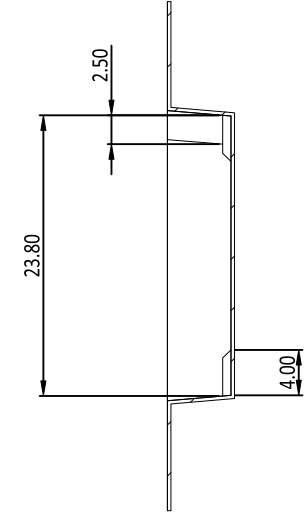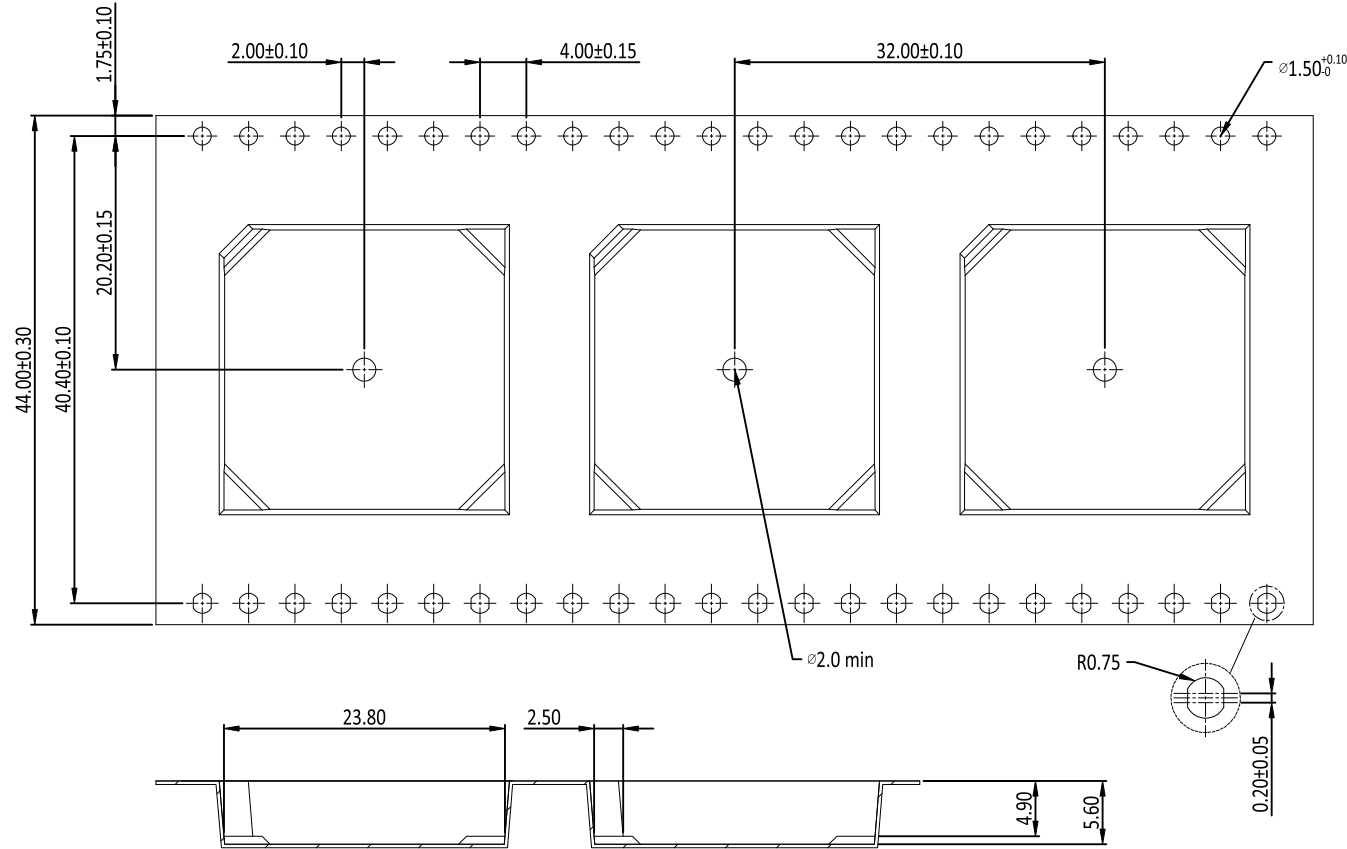


1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250mm.
3. Material : Black Conductive Polystyrene Alloy (UP-5000).
4. All dimensions meet EIA-481-B requirements.
5. Thickness : 0.30 ± 0.05 mm.
6. Packing length per 22" reel : 36.0 Meters.
7. Component load per 13" reel : 350 pcs.

W	44.00 ± 0.30
A0	23.80 ± 0.10
B0	23.80 ± 0.10
K0	5.60 ± 0.10
K1	4.90 ± 0.10

UNLESS OTHERWISE SPECIFIED TOLERANCE		SIP	 CHANT SINCERE CO., LTD TEL:+886-2-8647-1251 WWW.COXOC.COM.TW	
		ST		
SCALE: AS SHOWN		UNIT: mm	TITLE: packing for 44p	
DRAWN: KEVIN_ZHENG		12 07 2023		
CHECKED: PEARL_HUNG		12 07 2023	PART NO. 5200101XXXX	
APPROVED: PEARL_HUNG		12 07 2023		
ZONE	REVISION	DESCRIPTION	DATE	CUSTOMER:
1	2	3	4	5

ZONE		REVISION	DESCRIPTION	DATE
1		2	3	4
F		ECN-2306061(VICKY)CHANGE OUTLINE	19JUN2023	
E		ECN-1501001(STEVE)	02MAR2015	

RoHS
compliant

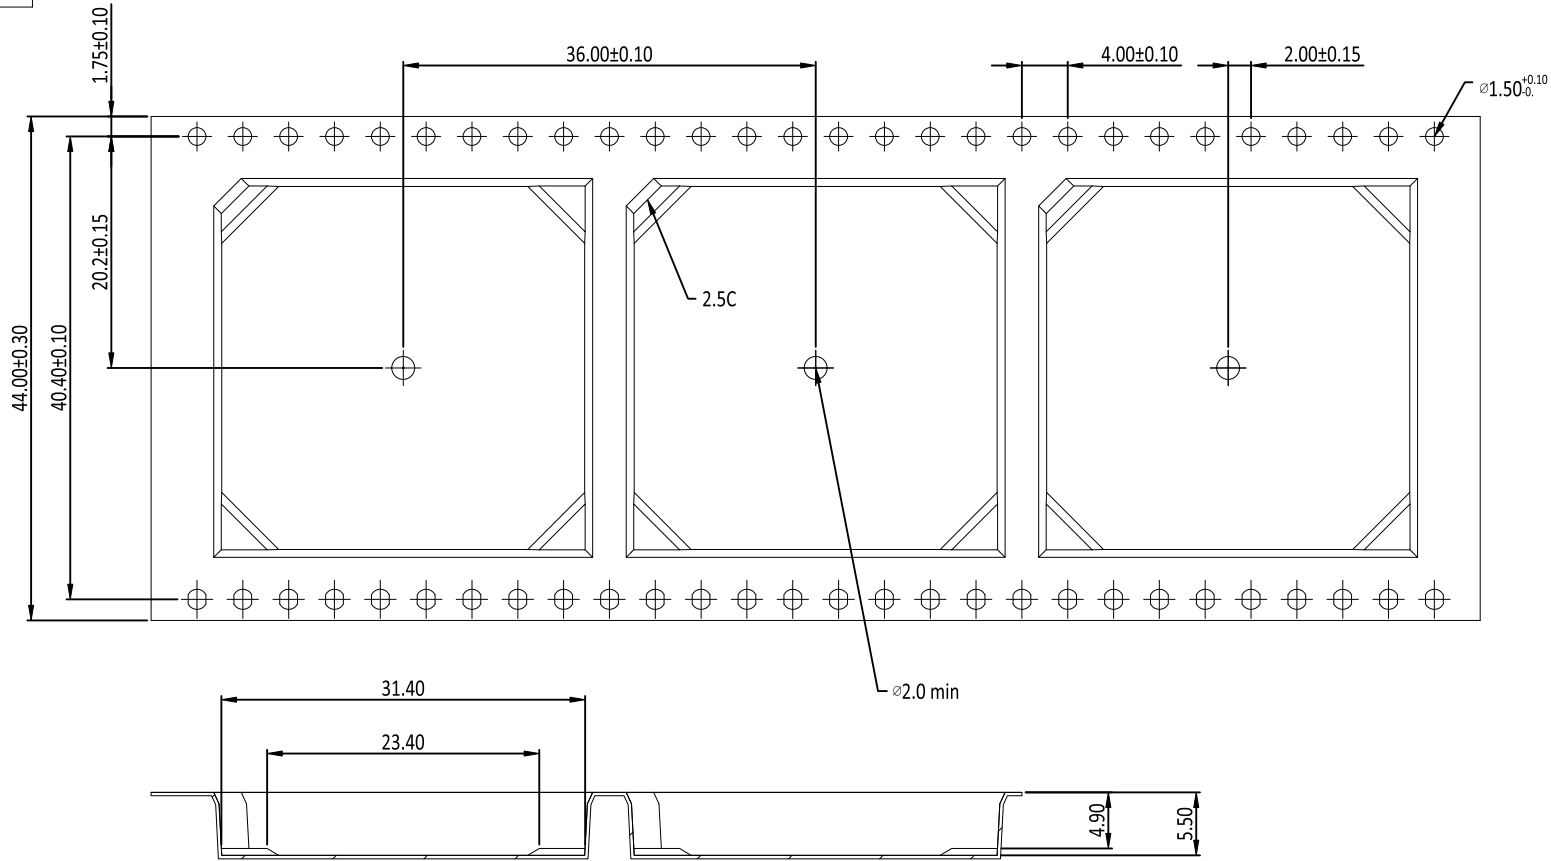

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250mm.
3. Material : Black Conductive Polystyrene Alloy.
4. All dimensions meet EIA-481-C requirements.
5. Thickness : $0.30 \pm 0.05 \text{ mm}$.
6. Packing length per 22" reel : 25.0 Meters(1:3)
7. Component load per 13" reel : 200 pcs.(N=180)

W	44.00 ± 0.30
A0	31.40 ± 0.10
B0	31.40 ± 0.10
K0	5.50 ± 0.10
K1	4.90 ± 0.10

UNLESS OTHERWISE
SPECIFIED TOLERANCE




CHANT SINCERE CO., LTD
TEL:+886-2-8647-1251 WWW.COXOC.COM.TW

SCALE:	AS SHOWN	UNIT:	mm
DRAWN:	KEVIN_ZHENG		12 07 2023
CHECKED:	PEARL_HUNG		12 07 2023
APPROVED:	PEARL_HUNG		12 07 2023

TITLE:	packing for 68p
PART NO.	5200101XXXX
CODE: 93	CUSTOMER:

ZONE	REVISION	DESCRIPTION	DATE	SIZE	A4	SHEET	4/5	REV.	F	CODE: 93	CUSTOMER:
1	2	3	4	5	6	7	8	9	10		

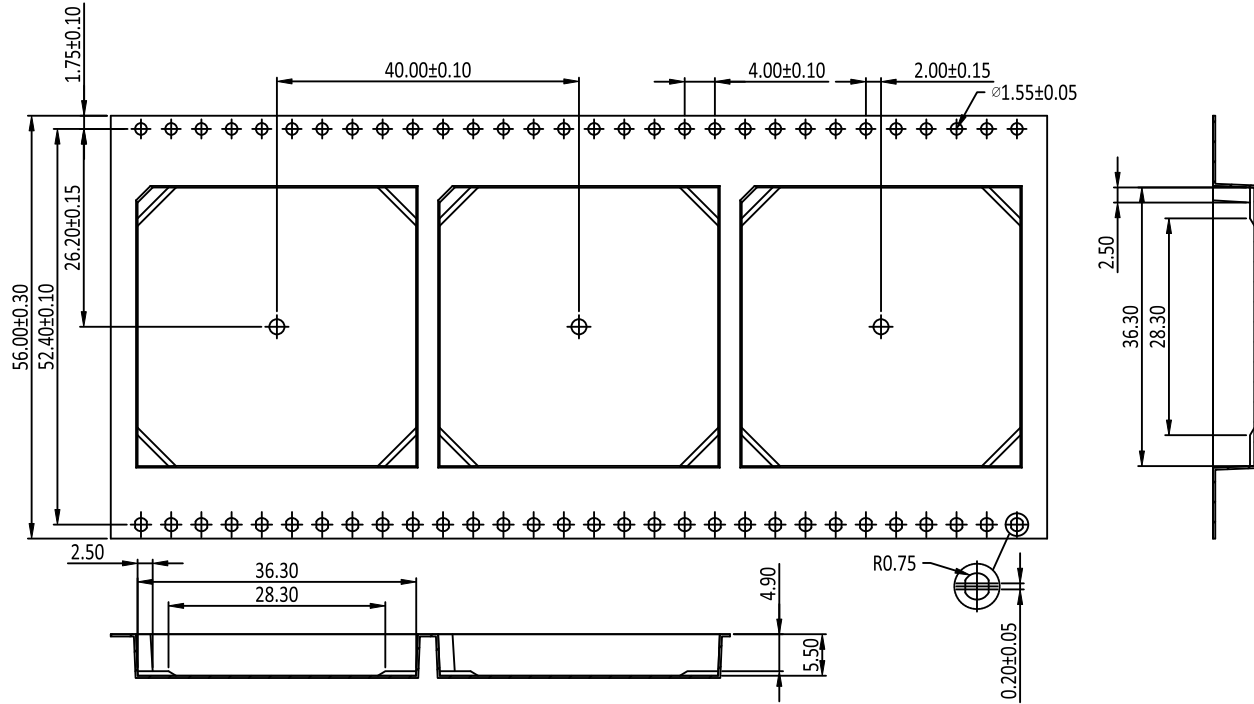

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250mm.
3. Material : Black Conductive Polystyrene Alloy (UP-5000).
4. All dimensions meet EIA-481-B requirements.
5. Thickness : 0.40 ± 0.05 mm.
6. Packing length per 22" reel : 33.0 Meters.
7. Component load per 13" reel : 250 pcs.

W	56.00 ± 0.30
A0	36.30 ± 0.10
B0	36.30 ± 0.10
K0	5.50 ± 0.10
K1	4.90 ± 0.10

UNLESS OTHERWISE
SPECIFIED TOLERANCE



CHANT SINCERE CO., LTD
TEL:+886-2-8647-1251 WWW.COXOC.COM.TW

SCALE:	AS SHOWN	UNIT:	mm
DRAWN:	KEVIN_ZHENG	12 07 2023	
CHECKED:	PEARL_HUNG	12 07 2023	
APPROVED:	PEARL_HUNG	12 07 2023	

TITLE:
packing for 84p

PART NO. 5200101XXXX

ZONE	REVISION	DESCRIPTION	DATE	SIZE A4	SHEET 5/5	REV. F	CODE: 93	CUSTOMER:
------	----------	-------------	------	---------	-----------	--------	----------	-----------