










RoHS
compliant



SPECIFICATION
MATERIAL AND FINISH:
1. CODING HOUSING: PBT 30% GF. UL94V-0, BLACK
2. CONTACT: BRASS
PLATING AREA: GOLD FLASH/SN OVER NI


ELECTRICAL CHARACTERISTIC:
1. INSULATION RESISTANCE: 5000 MΩ MIN.
2. CURRENT RATING: 1.0 A MAX.
3. DIELECTRIC WITHSTANDING: 1000VAC

ENVIRONMENT:
1. OPERATING TEMPERATURE RANGE: -40°C TO +105°C

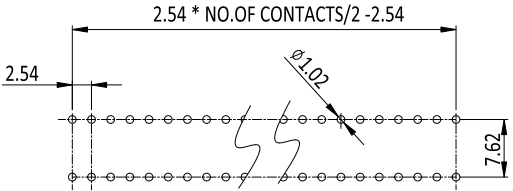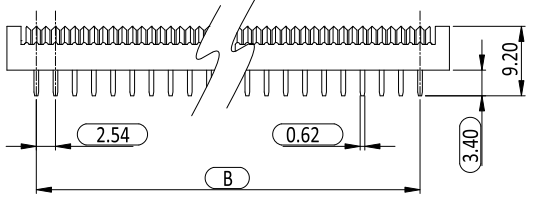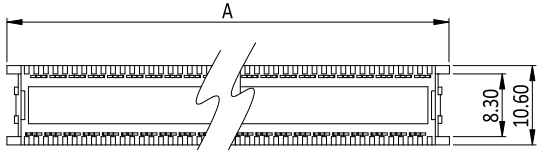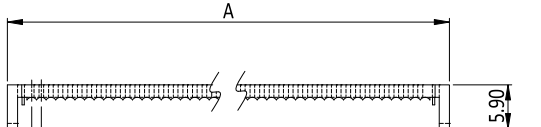

RECOMMENDED PCB. LAYOUT
TOLERANCES: ±0.05mm

9	52201010090	306AE40PSA0003	40	56.15	48.26
8	52201010080	306AE28PSA0003	28	40.81	33.02
7	52201010070	306AE24PSA0003	24	35.80	27.94
6	52201010060	306AE20PSA0003	20	30.68	22.86
5	52201010050	306AE18PSA0003	18	28.12	20.32
4	52201010040	306AE16PSA0003	16	25.50	17.78
3	52201010030	306AE14PSA0003	14	23.05	15.24
2	52201010020	306AE10PSA0003	10	17.95	10.16
1	52201010010	306AE08PSA0003	08	15.45	07.62

ITEM	NEW P/N		OLD P/N		PIN NO.	DIM A	DIM B	
UNLESS OTHERWISE SPECIFIED TOLERANCE			 SIP  Cmk Cpk		 CHANT SINCERE CO.,LTD			
.0 ±0.30 .00 ±0.20								
SCALE: AS SHOWN			UNIT: mm		TITLE: PDR- DIP PLUG 2.54*7.62mm			
DRAWN: RITA_CHANG			14 Nov 2024					
CHECKED: PEARL_HUNG			14 Nov 2024		PART NO. 5220101XXXX C			
APPROVED: PEARL_HUNG			14 Nov 2024					
	SIZE A4	SHEET 1/1	REV. E		CODE: C6		CUSTOMER:	

	E	ECN-2411054(KIRA)ADD. NEW P/N	14NOV2024
	D	ECN-0903138(SALLY)CHANGE OUTLINE	20MAR2009
	C	ECN-0706179(EMILY)	27JUN2007
ZONE	REVISION	DESCRIPTION	DATE