

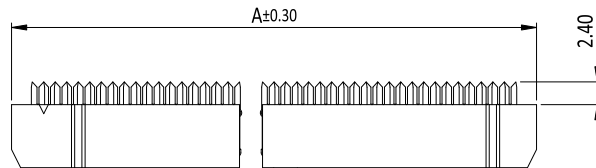

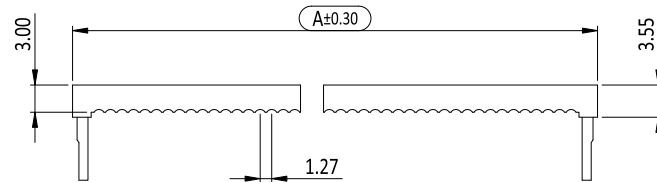



ELECTRICAL CHARACTERISTIC:
1. CURRENT RATING: 1 A DC
2. CONTACT RESISTANCE: 30 mΩ MAX.
3. INSULATION RESISTANCE: 3000 MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500 V AC


ENVIRONMENT:
1. OPERATING TEMPERATURE RANGE: -40°C TO +105°C

NOTE:
1. TERMINATED WITH 1.27mm PITCH FLAT RIBBON CABLE


DIMENSION			
PIN	A	B	C
06P	12.18	05.08	13.35
08P	14.72	07.62	13.35
10P	17.26	10.16	13.35
12P	19.80	12.70	13.35
14P	22.34	15.24	13.35
16P	24.88	17.78	13.35
18P	27.42	20.32	13.35
20P	29.96	22.86	13.35
24P	35.04	27.94	13.35
26P	37.58	30.48	13.35
30P	42.66	35.56	13.35
34P	47.74	40.64	13.35
40P	55.36	48.26	13.35
50P	68.06	60.96	13.35

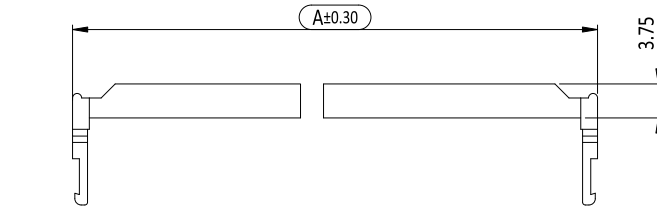


(14P~50P)




(06P)





(08P)




(10P)



(12P)

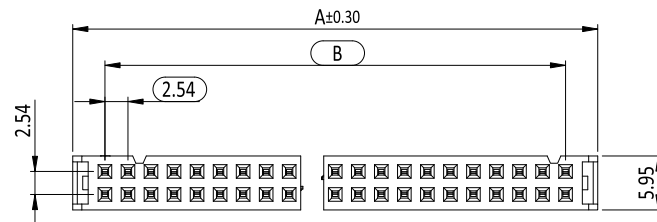

XXX=PIN(06~50)

2						
1	5220201XXX0	304AEXXPSBBA03	GOLD FLASH/NI	BLACK	W/O BAR, W/SR	
ITEM	NEW P/N	OLD P/N	CONTACT	COLOR	NOTE	
UNLESS OTHERWISE SPECIFIED TOLERANCE .X ±0.3 .XX ±0.20 .XXX ±0.100			 SIP  Cmk Cpk	 CHANT SINCERE CO.,LTD		
SCALE: AS SHOWN		UNIT: mm				
DRAWN: XINGRU_LAI	03 Dec 2024		TITLE: I.D.C. SOCKET-DUAL ROW (PITCH: 2.54mm)			
CHECKED: RITA_CHANG	03 Dec 2024					
APPROVED: RITA_CHANG	03 Dec 2024					PART NO. 5220201XXXX
 SIZE A4	SHEET 1/1	REV. F	CODE: C6			CUSTOMER:

	F	ECN-2411114(KITA)CHANGE OUT LINE	28NOV2024
	E	ECN-0612053(SALLY)	07DEC2006
	D	ECN-0509057(LILY)	08SEP2005
ZONE	REVISION	DESCRIPTION	DATE