

SPECIFICATION
MATERIAL AND FINISH:
1. INSULATOR: PBT, 30% GLASS FIBER, UL94V-0
2. CONTACT: BRASS
PLATING: GOLD FLASH OVER NI











ELECTRICAL CHARACTERISTIC:
1. CURRENT RATING: 1 A DC
2. CONTACT RESISTANCE: 30 mΩ MAX.
3. INSULATION RESISTANCE: 3000 MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500 V AC

ENVIRONMENT:
1. OPERATING TEMPERATURE RANGE: -40°C TO +105°C

NOTE:
1. TERMINATED WITH 1.27mm PITCH FLAT RIBBON CABLE

DIMENSION		
PIN	A	B
06P	12.18	05.08
08P	14.72	07.62
10P	17.26	10.16
12P	19.80	12.70
14P	22.34	15.24
16P	24.88	17.78
18P	27.42	20.32
20P	29.96	22.86
24P	35.04	27.94
26P	37.58	30.48
30P	42.66	35.56
34P	47.74	40.64
40P	55.36	48.26
50P	68.06	60.96

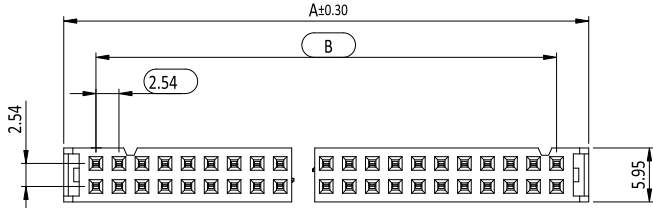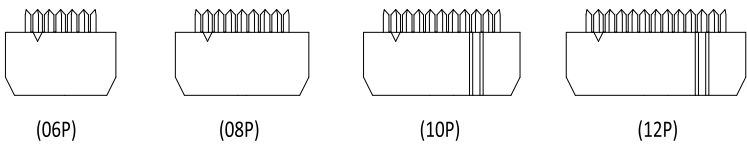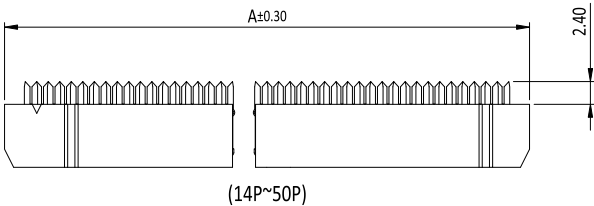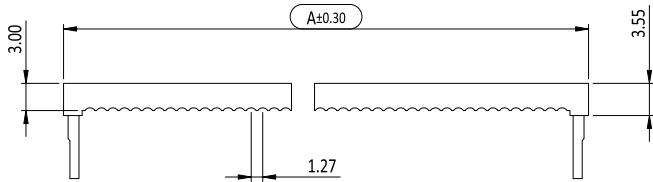

XXX=PIN(06~50)					
2					
1	5220202XXX0	304AEXXPSABA03	GOLD FLASH/NI	BLACK	W/O BAR, W/O SR
ITEM	NEW P/N	OLD P/N	CONTACT	COLOR	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE		 SIP		 CHANT SINCERE CO.,LTD	
.0 ±0.3 .00 ±0.20 .000 ±0.100		 Cmk Cpk			
SCALE: AS SHOWN		UNIT: mm			
DRAWN: XINGRU_LAI		04 Dec 2024		TITLE: I.D.C. SOCKET-DUAL ROW (PITCH:2.54mm)	
CHECKED: RITA_CHANG		04 Dec 2024			
APPROVED: RITA_CHANG		04 Dec 2024		PART NO.	5220202XXXX
		SIZE A4	SHEET 1/1	REV. F	CUSTOMER:
				CODE: C6	

	F	ECN-2412002(KITA)NEW P/N	02DEC2024
	E	ECN-0905068(JOCELYN)CHANGE OUTLINE	12MAY2009
	D	ECN-0410112(EMILY)	27OCT2004
ZONE	REVISION	DESCRIPTION	DATE



TITLE:
I.D.C. SOCKET-DUAL ROW
(PITCH:2.54mm)