
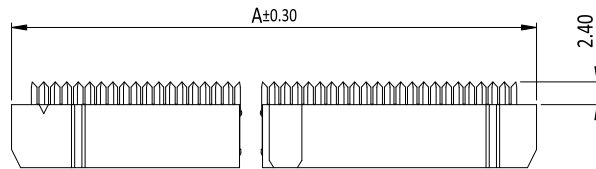

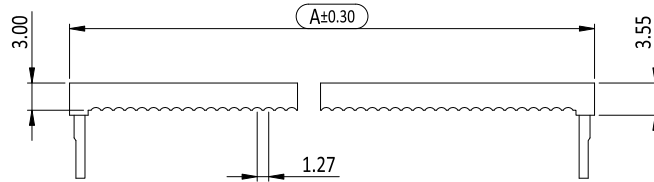



ELECTRICAL CHARACTERISTIC:
1. CURRENT RATING: 1 A DC
2. CONTACT RESISTANCE: 30 mΩ MAX.
3. INSULATION RESISTANCE: 3000 MΩ MIN.
4. DIELECTRIC WITHSTANDING: 500 V AC



ENVIRONMENT:
1. OPERATING TEMPERATURE RANGE: -40°C TO +105°C

NOTE:
1. TERMINATED WITH 1.27mm PITCH FLAT RIBBON CABLE


DIMENSION				
PIN	A	B	C	D
06P	12.18	05.08	13.35	1.90
08P	14.72	07.62	13.35	1.90
10P	17.26	10.16	13.35	3.60
12P	19.80	12.70	13.35	3.60
14P	22.34	15.24	13.35	3.60
16P	24.88	17.78	13.35	3.60
18P	27.42	20.32	13.35	3.60
20P	29.96	22.86	13.35	3.60
24P	35.04	27.94	13.35	3.60
26P	37.58	30.48	13.35	3.60
30P	42.66	35.56	13.35	3.60
34P	47.74	40.64	13.35	3.60
40P	55.36	48.26	13.35	3.60
50P	68.06	60.96	13.35	3.60

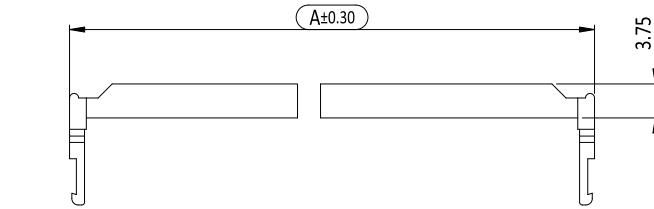


(14P~50P)




(06P)





(08P)




(10P)



(12P)

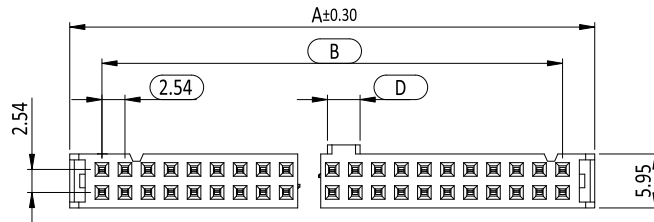

XXX=PIN(06~50)

2							
1	5220203XXX0	304AEXXPSBAA03	GOLD FLASH/NI	BLACK	W/BAR, W/SR		
ITEM	NEW P/N	OLD P/N	CONTACT	COLOR	NOTE		
UNLESS OTHERWISE SPECIFIED TOLERANCE .X ±0.3 .XX ±0.20 .XXX ±0.100		 SIP  Cmk Cpk	 CHANT SINCERE CO.,LTD				
SCALE: AS SHOWN		UNIT: mm					
DRAWN: XINGRU_LAI		04 Dec 2024				TITLE: I.D.C SOCKET-DUAL ROW (PITCH: 2.54mm)	
CHECKED: RITA_CHANG		05 Dec 2024					
APPROVED: RITA_CHANG		05 Dec 2024					
		PART NO. 5220203XXXX					
	SIZE A4	SHEET 1/1	REV. H	CODE: C6	CUSTOMER:		
7		8		10			

	H	ECN-2412007(KITA)NEW P/N	03DEC2024
	G	ECN-1002083(JOCELYN)	11NOV2010
	F	ECN-0809199(SALLY)	25SEP2008
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6	7	8
9	10	11	12