
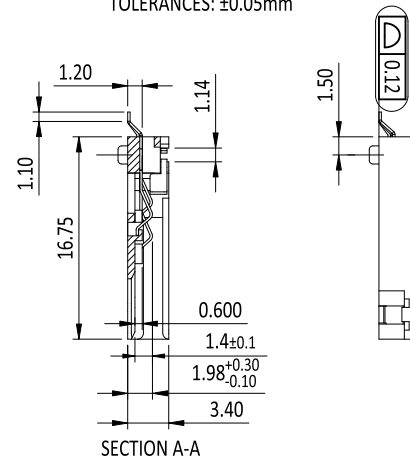
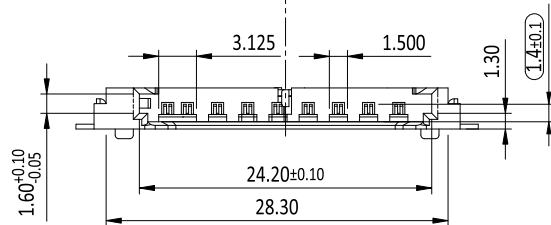
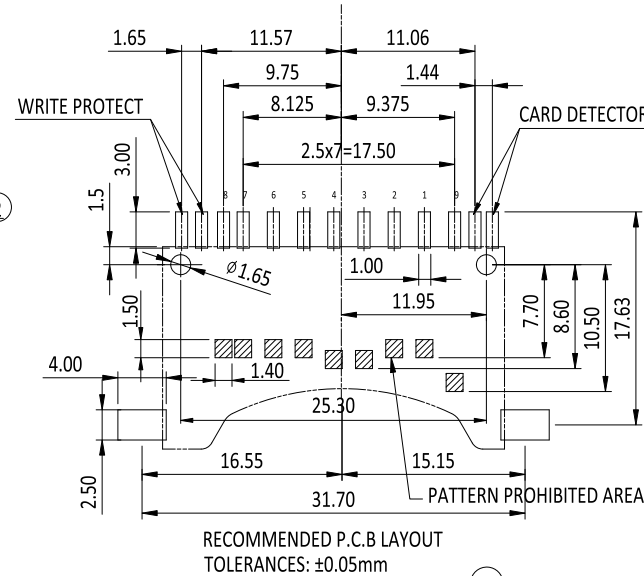
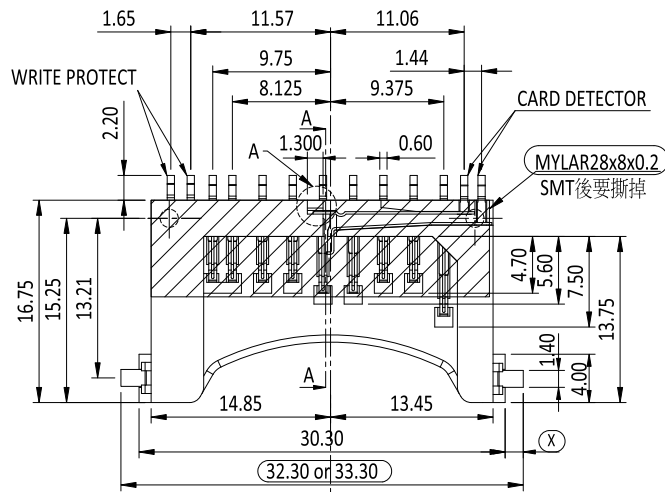



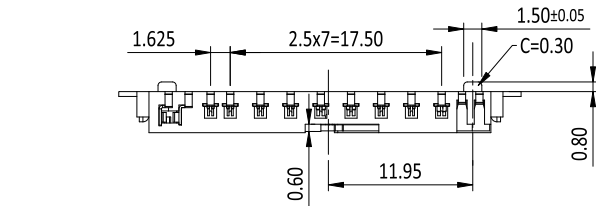


SPECIFICATION
MATERIAL AND FINISH:
 1. INSULATOR: THERMAL PLASTIC UL94V-0, BLACK
 2. CONTACTS: COPPER ALLOY
 PLATING: UNDERPLATE: 50u"~100u" NI
 CONTACT AREA: 1u"~30u" SELECTIVE GOLD
 SOLDER TAILS AREA: 100u"~200u" SN
 3. BOARDLOCK: COPPER ALLOY

ELECTRICAL CHARACTERISTIC:
 1. CURRENT RATING: 1 Amps MAX.
 2. CONTACT RESISTANCE: 100 MΩ MAX.
 3. INSULATION RESISTANCE: 1000 MΩ MIN.

MECHANICAL CHARACTERISTIC:
1. MATING CYCLE: 10000 CYCLES MINUTE

ENVIRONMENT:
1. OPERATING TEMPERATURE RANGE: -40°C TO +85°C

PIN#	NAME
1	CD/DAT3
2	CMD
3	VSS1
4	VDD
5	CLK
6	VSS2
7	DAT0
8	DAT1
9	DAT2

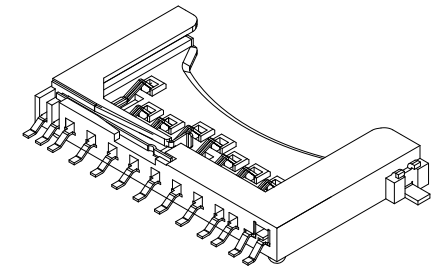

2	57321010020	412D02F09PC0C3	15u" GOLD/MATTE SN	1.5mm+MYLAR+REEL
1	57321010010	412D02F09PC003	15u" GOLD/MATTE SN	1.5mm
ITEM	NEW P/N	OLD P/N	CONTACT PLATING	TAP OPTION(DIM. X)
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. +5° +0.5 0 +0.3 +0.3 .00 +0.2		 SIP  Cmk Cpk	 CHANT SINCERE CO.,LTD	
SCALE: AS SHOWN		UNIT: mm		
DRAWN: XINGRU_LAI		20 Feb 2024		
CHECKED: PEARL_HUNG		08 Mar 2024		
APPROVED: PEARL_HUNG		08 Mar 2024	PART NO.	5732101XXXX
  SIZE A4	SHEET 1/1	REV. X	CODE: GB	CUSTOMER: