

RoHS
compliant



SPECIFICATION

MATERIAL AND FINISH:

1. INSULATOR: LCP, RATED UL94V-0, BLACK
2. CONTACTS: PHOSPHOR BRONZE, MATTE SN 160u" AT SOLDER TAIL, 15u" AU ON CONTACT AREA PLATING
3. SHELL: STAINLESS, GOLD FLASH ON SOLDER AREA, OVER NI PLATED (50u"MIN)
4. SPRING: SWP-B
5. HOOK: STAINLESS

ELECTRICAL CHARACTERISTIC:





1. CONTACT CURRENT RATING: 0.5 A MAX.
2. CONTACT RESISTANCE: 100 mΩ MAX.
3. INSULATION RESISTANCE: 250V DC OR 300V AC FOR NO LESS THAN 1 MINUTE, 1000 MΩ MIN.
4. DIELECTRIC STRENGTH: APPLY 500V AC FOR 1 MINUTE BETWEEN ADJACENT TERMINALS AND GROUND

MECHANICAL CHARACTERISTIC:

1. DURABILITY: 10000 CYCLES
2. INSERTION FORCE: 2.0 Kgf MAX.
3. EXTRACTION FORCE: 0.5 Kgf MIN.

ENVIRONMENT:

1. OPERATING TEMPERATURE RANGE: -25°C TO +85°C

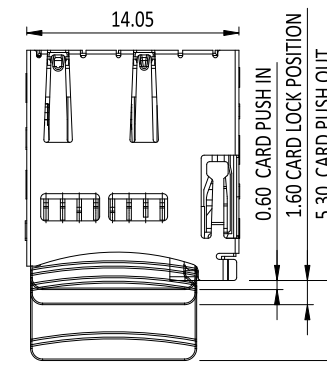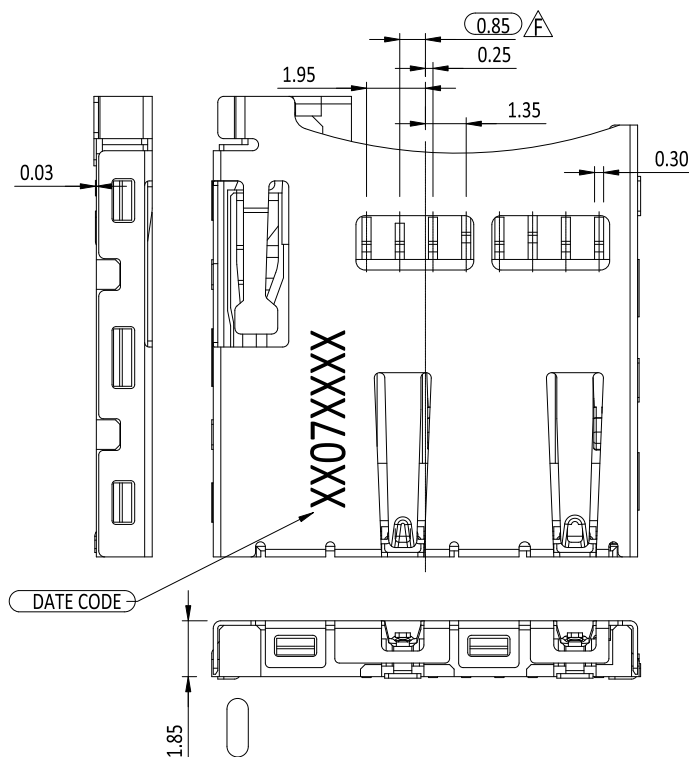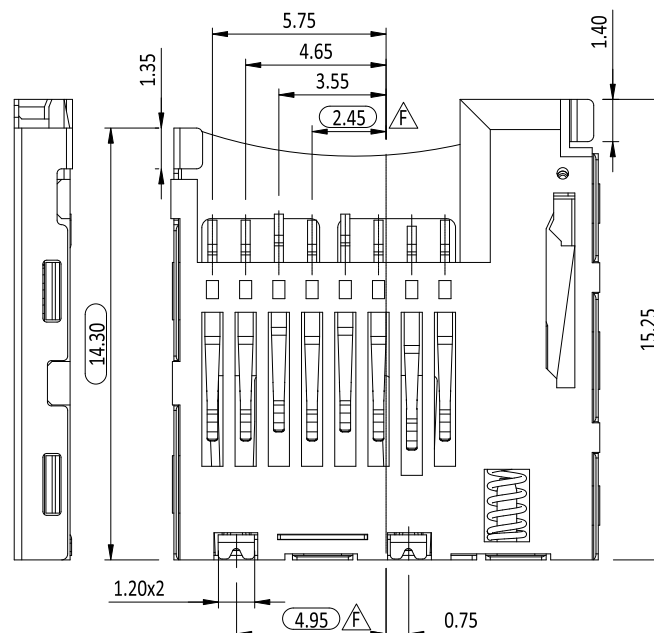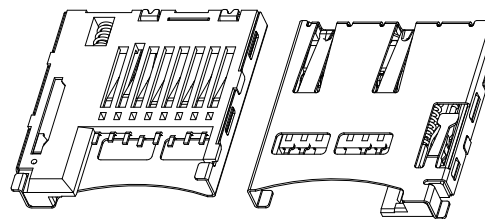


LOGO.

X X 07 XX X X
1 2 3 4 5 6

1. 塑膠滑塊模穴號
2. 塑膠主體模穴號
3. YEAR
EX.07=2007
4. WEEK CODE
5. DAY CODE
SUNDAY(星期日) = 1
MONDAY(星期一) = 2
TUESDAY(星期二) = 3
WEDNESDAY(星期三) = 4
THURSDAY(星期四) = 5
FRIDAY(星期五) = 6
SATURDAY(星期六) = 7
6. 1=手工線
2=自動機線

2				
1	57329010010	460DA3F08PC0013	W/O DATE CODE	
ITEM	NEW P/N	OLD P/N	INSULATOR	NOTE
UNLESS OTHERWISE SPECIFIED TOLERANCE X. ±0.50 X.° ±5° .X ±0.38 .X° ±2° .XX ±0.25 .XX° ±1°		SIP Cmk Cpk	 CHANT SINCERE CO.,LTD	
SCALE: AS SHOWN		UNIT: mm		
DRAWN: XINGRU_LAI		21 Mar 2024		TITLE: MICROSD MEMORY CARD CONN. (PUSH/PUSH NORMAL TYPE)
CHECKED: PEARL_HUNG		21 Mar 2024		PART NO. 57329010010
APPROVED: PEARL_HUNG		21 Mar 2024		CODE: J03
		SIZE A4	SHEET 1/3	REV. G
				CUSTOMER:

	G	ECN-2403051(JOLIN)NEW P/N	15MAR2024
(3,F) (6,C) (6,F)	F	ECN-1609003(JASON_TONG)ADD SIP	02SEP2016
	E	ECN-1411044(SUNNY)SEE DWG 3/3	24NOV2014
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4
5	6		

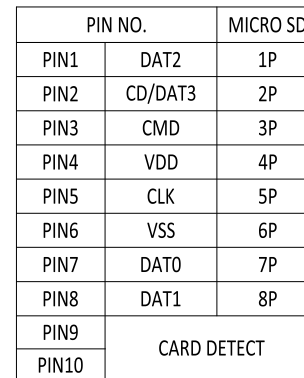


CIRCUIT: WITHOUT CARD	CARD INSERTED
-------------------------------------	----------------------

UNLESS OTHERWISE SPECIFIED TOLERANCE $X \pm 0.50$ $X^\circ \pm 5^\circ$ $.X \pm 0.38$ $.X^\circ \pm 2^\circ$ $.XX \pm 0.25$ $.XX^\circ \pm 1^\circ$		 SIP  Cmk Cpk		 CHANT SINCERE CO.,LTD	
SCALE: AS SHOWN		UNIT: mm			
DRAWN: XINGRU_LAI		21 Mar 2024			
CHECKED: PEARL_HUNG		21 Mar 2024		TITLE: MICROSD MEMORY CARD CONN. (PUSH/PUSH NORMAL TYPE)	
APPROVED: PEARL_HUNG		21 Mar 2024			
  SIZE A4		SHEET 2/3		PART NO. 57329010010	
  7		REV. G		CODE: J03	
8		9		CUSTOMER:	
10		11		12	


包裝作業圖示及說明

(PACKING OPERATION DIAGRAM & INSTRUCTION)



- 一.
- 1) 將成品一一放入REEL包裝盤內,依同一方向放入
 - 2) 包裝時,如圖所示
 - 3) 一個REEL包裝盤放置 1000 個成品

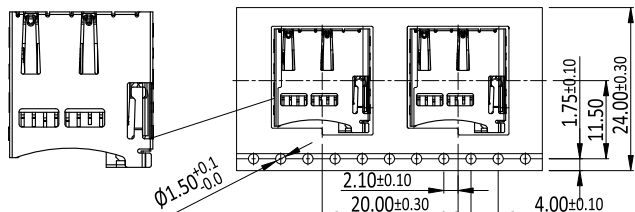


- 二.
- 1) 裝盤前先把前面空15格, 然后再开始裝盤, 尾端也需空出15格
 - 2) 裝滿成品的REEL包裝盤如下圖所示

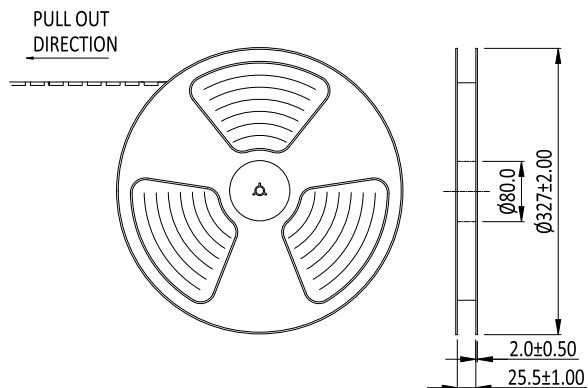

- 三.
- 1) 每箱裝 10 盤REEL包裝盤
 - 2) 每箱放置 10000 PCS 的成品

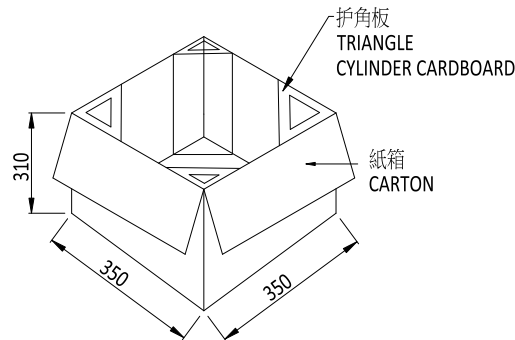


- 四.
- 1) 用TAPE將紙箱封實

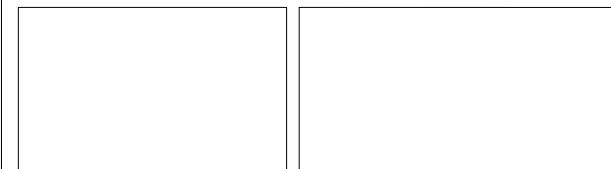

備 註 (REMARK)

1. 若有未裝滿之零數箱,必須以緩衝材塞滿

UNLESS OTHERWISE SPECIFIED TOLERANCE .X. ±0.50 .X° ±5° .X ±0.38 .X° ±2° .XX ±0.25 .XX° ±1°			 SIP  Cmk Cpk		 CHANT SINCERE CO.,LTD
SCALE: AS SHOWN			UNIT: mm		
DRAWN: XINGRU_LAI			21 Mar 2024		TITLE: MICROSD MEMORY CARD CONN. (PUSH/PUSH NORMAL TYPE)
CHECKED: PEARL_HUNG			21 Mar 2024		
APPROVED: PEARL_HUNG			21 Mar 2024		PART NO. 57329010010
	SIZE A4	SHEET 2/3	REV. G	CODE: J03	CUSTOMER:
7		8		9	10

	G	ECN-2403051(JOLIN)NEW P/N	15MAR2024
	F	ECN-1609003(JASON_TONG)SEE DWG 1/3	02SEP2016
	E	ECN-1411044(SUNNY)SEE DWG 3/3	24NOV2014
ZONE	REVISION	DESCRIPTION	DATE
1	2	3	4