
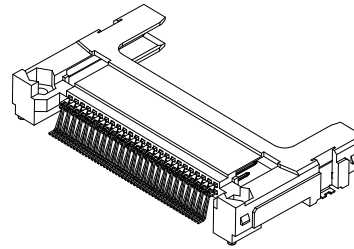


RoHS
compliant

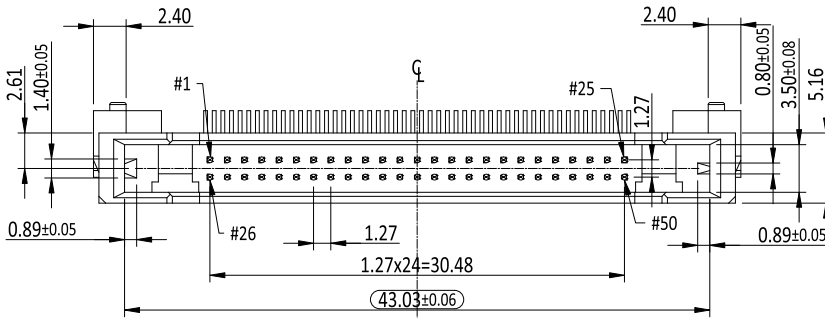

POWER	5.00mm	1, 13, 38, 50
GENERAL	4.25mm	ALL OTHER PINS
DETECT	3.50mm	25, 26
PIN TYPE	INTERFACE DIM. L	PIN NO.

SPECIFICATION

MATERIAL AND FINISH:

1. INSULATOR: THERMAL PLASTIC UL94V-0, WHITE

2. CONTACTS: COPPER ALLOY

PLATING: UNDERPLATED: 50u"~100u" NI

CONTACT AREA: 1u"~30u" SELECTIVE AU




SOLDER TAILS AREA: 100u"~200u" MATTE SN

3. SHELL: STEEL


4. RIVET, BOARDLOCK: COPPER ALLOY

ELECTRICAL CHARACTERISTIC:

1. RATED VOLTAGE: 35V/AC MAX.

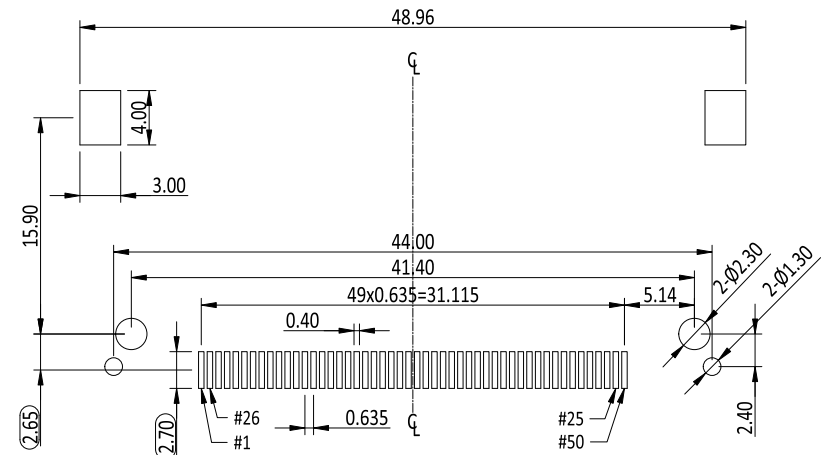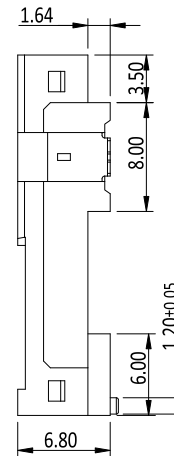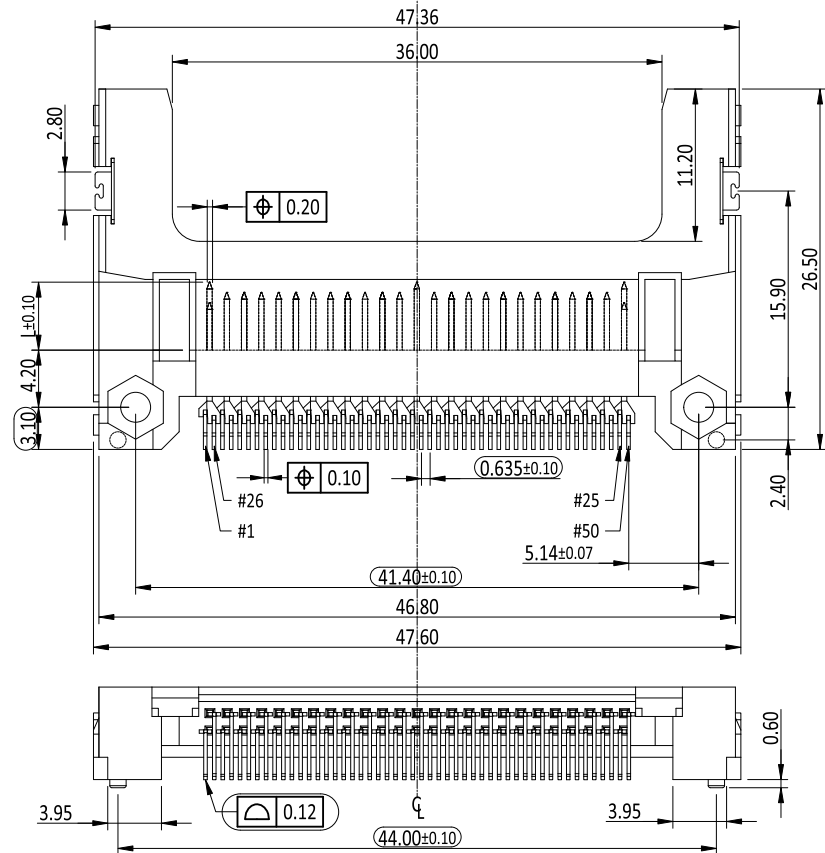

RECOMMENDED PCB LAYOUT
TOLERANCES: ±0.05mm

2				
1	57523020010	752DF50NC01001	15u" AU/SN MATTE	W/O NUT
ITEM	NEW P/N	OLD P/N	CONTACT PLATING	PART OPTION
UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. ±5° 0 ±0.5 0 ±0.3 .00 ±0.2		 SIP  Cmk  Cpk  CHANT SINCERE CO.,LTD		
SCALE: AS SHOWN		UNIT: mm		
DRAWN: BENSON_ZHENG		27 Nov 2024		
CHECKED: PEARL_HUNG		27 Nov 2024		
APPROVED: PEARL_HUNG		27 Nov 2024		
		PART NO. 5752302XXXX		
	SIZE A4	SHEET 1/1	REV. C	CODE: GA
7		8		9
				10



TITLE:
CFA TYPE 1 (STAND OFF 1.64mm)
SLOT HEADER(REVERSE)

C	ECN-2411098(JOLIN)NEW P/N	25NOV2024
B	ECN-0708144(LVXIANGLIN)	25AUG2007
A	ECN-0701097(HILLARY)	27DEC2006
ZONE	REVISION	DESCRIPTION
1	2	3
4	5	6