
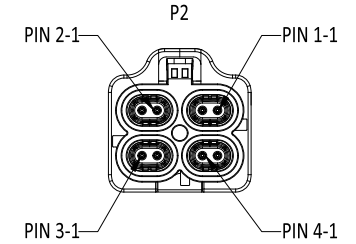
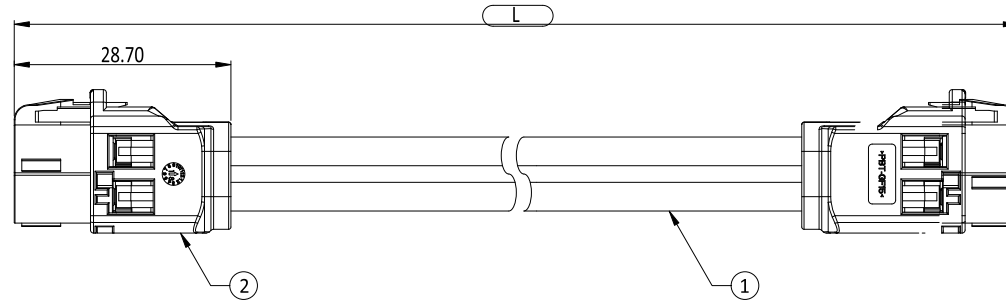


RoHS
compliant

PRELIMINARY



SPECIFICATION:
ELECTRICAL TEST:
1. FINISHED CABLE 100% CONDUCTIVITY TEST
2. IMPEDANCE: 100 Ω
3. TEMPERATURE RANGE: -40°C TO +105°C
4. PART NO.

C7 S6 4 XX 3 A01X E XXX
1 2 3 4 5 6 7 8

- 1. SERIES NO.
C7=BNC TYPE
- 2. CONNECTOR OPTION:
S6=HCMTD/HCMTD
- 3. CONTACT TYPE:
4=F/F
- 4. CODE:
AA=A/A ; BB=B/B ; CC=C/C;
DD=D/D ; ; ZZ=Z/Z
HCMTD JACK
- 5. CABLE COLOR:
3=BLACK
- 6. TYPE:
A01=NONE LOGO
A01S=COXOC LOGO
- 7. GREEN OPTION:
E=RoHS
- 8. LENGTH:
1M0=1000mm
3M5=3500mm
10M=10000mm

PART NO.	L(LENGTH)
C7S64XX3A01X1M0	1000±30mm
C7S64XX3A01X3M5	3500±50mm
C7S64XX3A01X10M	10000±100mm

WIRING DIAGRAM	
P1	P2
PIN 1-1	PIN 1-1
PIN 1-2	PIN 1-2
PIN 2-1	PIN 2-1
PIN 2-2	PIN 2-2
PIN 3-1	PIN 3-1
PIN 3-2	PIN 3-2
PIN 4-1	PIN 4-1
PIN 4-2	PIN 4-2

2	HMTD-N JACK	THERMOPLASTIC UL94V-0, 30u" GOLD	1
1	CABLE	DIFFIERENTIAL CABLE; #26 X 2C, AL+BRAID, OD: 3.8mm, BLACK	A/R
ITEM	PART	DESCRIPTION	QTY

UNLESS OTHERWISE SPECIFIED TOLERANCE		SIP
ANG. ±2°	0. ±0.50	ST Cmk Cpk
.0 ±0.30	.00 ±0.20	
SCALE: 1:1	UNIT: mm	
DRAWN: VICKY_HSIEH	15 Feb 2024	
CHECKED: JASON_HUANG	15 Feb 2024	
APPROVED: JASON_HUANG	15 Feb 2024	
SIZE A4	SHEET 1/1	REV. X4

 CHANT SINCERE CO.,LTD	
TITLE: PDR-20061	
HMTD-N 2X2 JACK CABLE	
PART NO.	C7S64XX3A01SEXXX
CODE: GC	CUSTOMER: XXX

A4, D5, D7	X3	UPDATE	04JAN2023
C2, D5	X2	UPDATE	18MAR2022
ZONE	REVISION	DESCRIPTION	DATE