


NOTE:
 1.CABLE ASSEMBLY MUST BE RoHS COMPLIANT.
 2.CABLE MUST BE OPEN,SHORT,MISWIRE 100% TEST.
 3.USB CABLE ELECTRIC TEST:
 A.VOLTAGE: 300V DC.
 B.CONTACT RESISTENCE: 5 Ohm Max.
 C.INSULATION RESISTENCE:2M Ohm Min.

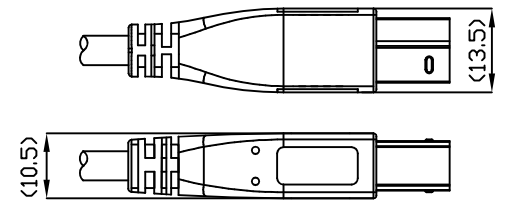

PART NO. _____
 SERIES NO. _____
 C8=USB TYPE
 CONNECTOR OPTION _____
 F1=USB 3.1/USB 3.1
 CONNECTOR TYPE _____
 L=CM/BM _____
 LENGTH NO. _____
 1M0=1000 mm
 GREEN OPTION _____
 E=RoHS
 TYPE. _____
 CABLE COLOR _____
 3=BLACK

P1		WIRING DIAGRAM				P2	
USB C PLUG		WIRE				USB 3.1 BM	
PIN	SIGNAL NAME	WIRE NUMBER	SIGNAL NAME	WIRE COLOR & AWG	PIN	SIGNAL NAME	
A1,B1, A12,,B12	GND	1 7,10	GND_PWRr-t1 SDP1_DRAIN,SDP2_DRAIN	BLACK SDP1+SDP2 DRAIN	4 7	GND GND_DRAIN	
A4,B4, A9,B9	VBUS	2	PWR_VBUS1	RED	1	VBUS	
A5	CC	W/Resistor					
B5	VCONN	N/A					
A6	Dp1	3	UTP_Dp	GREEN	3	D+	
A7	Dn1	4	UTP_Dn	WHITE	2	D-	
A2	SSTXp1	5	SDPp1	YELLOW	9	StdB_SSRX+	
A3	SSTXn1	6	SDPn1	BLUE	8	StdB_SSRX-	
B11	SSRXp1	8	SDPp2	ORANGE	6	StdB_SSTX+	
B10	SSRXn1	9	SDPn2	PURPLE	5	StdB_SSTX-	
SHELL	SHIELD	BRIAD	SHIELD	BRIAD	SHELL	SHIELD	

8	Over Mold	PVC COLOR BLACK
7	Inner Mold	PE
6	FOIL	COPPER FOIL
5	PCBA	PCBA, W/Resistor(Rd 5.1K ohm),Capacitor 10nF
4	TIN	TIN STICK,TIN WIRE
3	CONN P2	USB3.1 B Male, BLACK INSULATOR, CONTACT PLATING: Au 30u' SHELL PLATED NICKEL,(W/TIN PLATE)
2	CONN P1	USB C PLUG, BLACK INSULATOR,CONTACT PLATING: Pd-Ni 30u'+Gold 2u' SHELL PLATED NICKEL,(W/TIN PLATE)
1	CABLE	USB3.1 UL20276 28/28/24 ADB OD:5.0mm, BLACK PVC JACKET
NO.	TITLE	DESCRIPTION

For SIP


UNLESS OTHERWISE SPECIFIED TOLERANCE
 ANG. ±
 0. ±1
 .0 ±0.5
 .00 ±0.25

SCALE: AS SHOWN UNIT: mm


DRAWN Vicky 11/30/16 DRAWN NAME:
 CHECKED JKC 11/30/16 USB C Plug to BM (3.1) Cable 1/2
 APPROVED / / PRODUCT NO: C8F1L3A03E1M0
 FILE NAME: C8F1L3A03E1M0(GB)(CXDC)

CHANT SINCERE CO.,LTD
 TEL:886-02-86471251 FAX:886-02-86472962


REV.	DESCRIPTION	DATE	SIZE	REV. X2
1			A4	

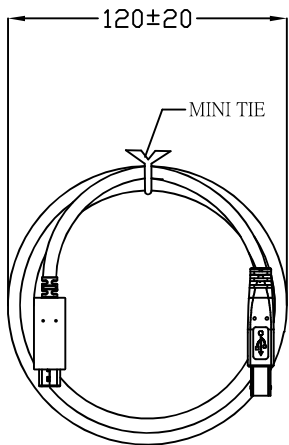


USB C/BM 3.1 CABLE

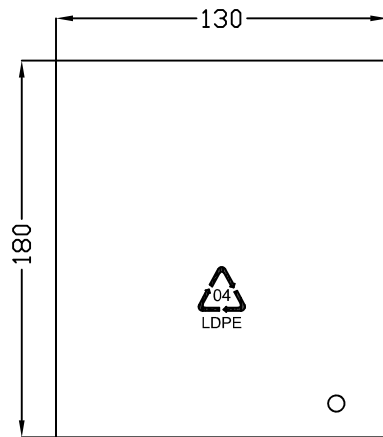


PE BAG:L180*W130*T0.05mm

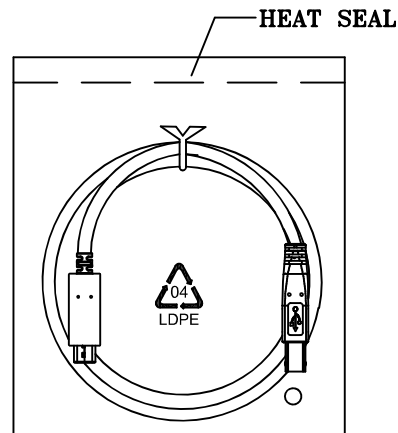


1PCS CABLE/PE BAG

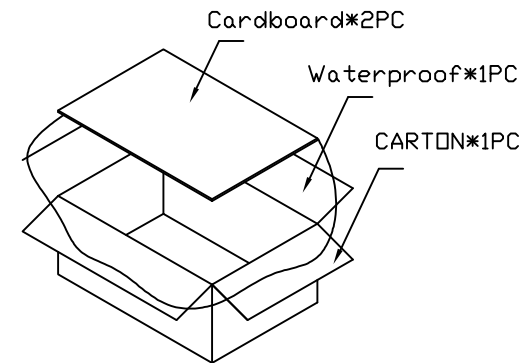

(CARTON:L457*W298*H228mm Material K=K)

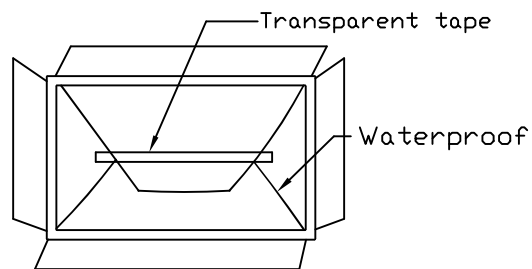

(After the installed Product, carton sealing tape should be transparent)

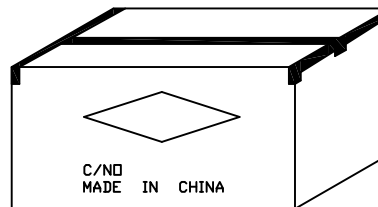

(CARTON:L457*W298*H228mm,Material K=K)

PO NO:	
ITEM NO:	
QTY:	PCS
N.W.:	KGS
G.W.:	KGS
MEAS:	1.1'

(CARTON SIDE)

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANG.	±	
0.	±1	CHANT SINCERE CO.,LTD TEL:886-02-86471251 FAX:886-02-86472962
.0	±0.5	
.00	±0.25	
SCALE: AS SHOWN	UNIT: mm	
DRAWN Vicky	11/30/16	DRAWN NAME:
CHECKED Jackyc	11/30/16	USB C Plug to BM (3.1) Cable
APPROVED	/ /	PRODUCT NO: C8F1L3A03E1M0
REV.	X2	FILE NAME: C8F1L3A03E1M0(GB)(COXOC)

REV.	DESCRIPTION	DATE
1		
2		
3		
4		
5		
6		



2/2